

Signal Detection in
Non-Gaussian Noise



Springer-Verlag

9 52002 5420001

Saleem A. Kassam

Signal Detection in Non-Gaussian Noise

Consulting Editor: John B. Thomas

With 38 Illustrations



Springer-Verlag
New York Berlin Heidelberg
London Paris Tokyo

A Dowden &
Culver Book

PREFACE

Salem A. Kassam
Department of Electrical Engineering
University of Pennsylvania
Philadelphia, PA 19106
USA

This book contains a unified treatment of a class of problems of signal detection theory. This is the detection of signals in additive noise which is not required to have Gaussian probability density functions in its statistical description. For the most part the material developed here can be classified as belonging to the general body of results of parametric theory. Thus the probability density functions of the observations are assumed to be known, at least to within a finite number of unknown parameters in a known functional form. Of course the focus is on noise which is not Gaussian; results for Gaussian noise in the problems treated here become special cases. The contents also form a bridge between the classical results of signal detection in Gaussian noise and those of nonparametric and robust signal detection, which are not considered in this book.

Three canonical problems of signal detection in additive noise are covered here. These allow between them formulations of a range of specific detection problems arising in applications such as radar and sonar, binary signaling, and pattern recognition and classification. The simplest to state and perhaps the most widely studied of all is the problem of detecting a completely known deterministic signal in noise. Also considered here is the detection of a random non-deterministic signal in noise. Both of these situations may arise for observation processes of the low-pass type and also for processes of the band-pass type. Spanning the gap between the known and the random signal detection problems is that of detection of a deterministic signal with random parameters in noise. The important special case of this treated here is the detection of phase-incoherent narrowband signals in narrowband noise.

There are some specific assumptions that we proceed under throughout this book. One of these is that ultimately all the data which our detectors operate on are discrete sequences of observation components, as opposed to being continuous-time waveforms. This is a reasonable assumption in modern implementations of signal detection schemes. To be able to treat non-Gaussian noise with any degree of success and obtain explicit, canonical, and useful results, a more stringent assumption is needed. This is the independence of the discrete-time additive noise components in the observation processes. There do exist many situations under which this assumption is at least a good approximation.

With the same objective of obtaining explicit canonical results of practical appeal, this book concentrates on locally optimum and asymptotically optimum detection schemes. These criteria are appropriate in detection of weak signals (the low

Library of Congress Cataloging-in-Publication Data

Kassam, Salem A.

Signal detection in non-Gaussian noise.

(Springer texts in electrical engineering)

Bibliography: p.

1. Signal theory (Telecommunication) 2. Signal

detection. I. Title. II. Series.

TK5102.5.K257 1987 621.38'W36 87-32197

© 1988 by Dowden & Culver, Inc.

All rights reserved. This work may be translated or copied in whole or in part without the written

permission of the publisher, except for brief excerpts in connection with reviews or scholarly

analysis. Use in connection with any form of information storage and retrieval, electronic adaptation,

computer software, or by similar or dissimilar methodology now known or hereafter developed is

forbidden.

The use of general descriptive names, trade names, trademarks, etc. in this publication, even if the

former are not especially identified, is not to be taken as a sign that such names, as understood by

the Trade Marks and Merchandise Marks Act, may accordingly be used freely by anyone.

Camera-ready copy provided by the author.

Printed and bound by R.R. Donnelley & Sons, Harrisonburg, Virginia.

Printed in the United States of America.

9 8 7 6 5 4 3 2 1

ISBN 0-387-96080-3 Springer-Verlag New York Berlin Heidelberg

ISBN 3-540-96080-3 Springer-Verlag Berlin Heidelberg New York

signal-to-noise-ratio case), for which the use of optimum detectors is particularly meaningful and necessary to extract the most in detection performance.

Most of the development given here has not been given detailed exposition in any other book covering signal detection theory and applications, and many of the results have appeared relatively recently in technical journals. In presenting this material it is assumed only that the reader has had some exposure to the elements of statistical inference and of signal detection in Gaussian noise. Some of the basic statistics background needed to appreciate the rest of the development is reviewed in Chapter 1. This book should be suitable for use in a first graduate course on signal detection, to supplement the classical material on signal detection in Gaussian noise. Chapters 2-4 may be used to provide a fairly complete introduction to the known signal detection problem. Chapters 5 and 6 are on the detection of narrowband known and phase-incoherent signals, respectively, and Chapter 7 is on random signal detection. A more advanced course on signal detection may also be based on this book, with supplementary material on nonparametric and robust detection if desired. This book should also be useful as a reference to those active in research, as well as to those interested in the application of signal detection theory to problems arising in practice.

The completion of this book has been made possible through the understanding and help of many individuals. My family has been most patient and supportive. My graduate students have been very stimulating and helpful. Prashant Gandhi has been invaluable in getting many of the figures ready. For the excellent typing of the drafts and the final composition, I am grateful to Drucilla Spanner and to Diane Griffiths. Finally, I would like to acknowledge the research support I have received from the Air Force Office of Scientific Research and the Office of Naval Research, which eventually got me interested in writing this book.

Salem A. Kassam
University of Pennsylvania
Philadelphia, PA 19104

TABLE OF CONTENTS

	Page
Chapter 1 Elements of Statistical Hypothesis Testing	1
1.1 Introduction	1
1.2 Basic Concepts of Hypothesis Testing	2
1.3 Most Powerful Tests and the Neyman-Pearson Lemma	3
1.4 Local Optimality and the Generalized Neyman-Pearson Lemma	5
1.5 Bayes Tests	8
1.6 A Characterization of the Relative Performance of Tests	10
1.6.1 Relative Efficiency	11
1.6.2 Asymptotic Relative Efficiency	12
Problems	21
Chapter 2 Detection of Known Signals in Additive Noise	24
2.1 Introduction	24
2.2 The Observation Model	24
2.2.1 Detection of a Pulse Train	25
2.2.2 Statistical Assumptions	29
2.3 Locally Optimum Detection and Asymptotic Optimality	31
2.3.1 Locally Optimum Detectors	34
2.3.2 Generalized Correlator Detectors	37
2.3.3 Asymptotic Optimality	39
2.3.4 Asymptotic Optimality of LO Detectors	42
2.4 Detector Performance Comparisons	46
2.4.1 Asymptotic Relative Efficiency and Efficacy	47
2.4.2 Finite-Sample-Size Performance	54
2.5 Locally Optimum Bayes Detection	64
2.6 Locally Optimum Multivariate Detectors	67
Problems	70

Chapter 3 Some Univariate Noise Probability Density Function Models	72	
3.1 Introduction	72	
3.2 Generalized Gaussian and Generalized Cauchy Noise	73	
3.2.1 Generalized Gaussian Noise	74	
3.2.2 Generalized Cauchy Noise	78	
3.3 Mixture Noise and Middleton Class A Noise	84	
3.4 Adaptive Detection	91	
Problems	94	
Chapter 4 Optimum Data Quantization in Known-Signal Detection	97	
4.1 Introduction	97	
4.2 Asymptotically Optimum Quantization	99	
4.3 Asymptotically Optimum Generalized Quantization	111	
4.4 Maximum-Distance Quantization	115	
4.5 Approximations of Locally Optimum Test Statistics	118	
Problems	124	
Chapter 5 Detection of Known Narrowband Signals in Narrowband Noise	127	
5.1 Introduction	127	
5.2 The Observation Model	128	
5.3 Locally Optimum Detection	131	
5.4 Asymptotic Performance Analysis	139	
5.5 Asymptotically Optimum Envelope Quantization	144	
5.6 Locally Optimum Bayes Detection	146	
Problems	148	
Chapter 6 Detection of Narrowband Signals with Random Phase Angles	151	
6.1 Introduction	151	
6.2 Detection of an Incoherent Signal	151	
6.2.1 The Observation Model	152	
6.2.2 The Locally Optimum Detector	153	
6.3 Detection of a Noncoherent Pulse Train	162	
6.3.1 The Observation Model	163	
6.3.2 The Locally Optimum Detector	166	
6.4 Asymptotically Optimum Quantization	172	
6.4.1 M -Interval Envelope Quantization	172	
6.4.2 Optimum Envelope Quantization for Gaussian Noise	175	
6.4.3 M -Region Generalized Quantization	181	
Problems	183	
Chapter 7 Detection of Random Signals in Additive Noise	185	
7.1 Introduction	185	
7.2 The Observation Model	186	
7.3 Locally Optimum Array Detection	188	
7.3.1 General Form of the LO Test Statistic	188	
7.3.2 LO Statistic for White Signal Sequence	192	
7.3.3 LO Statistic for Correlated Signal Sequence	196	
7.4 Asymptotic Performance Characteristics	198	
7.5 Asymptotically Optimum Quantization	204	
7.6 Detection of Narrowband Random Signals	208	
Problems	211	
References	215	
Index	227	

Chapter 1

ELEMENTS OF STATISTICAL HYPOTHESIS TESTING

1.1 Introduction

The signal processing problem which is the object of our study in this book is that of detecting the presence of a signal in noisy observations. Signal detection is a function that has to be implemented in a variety of applications, the more obvious ones being in radar, sonar, and communications. By viewing signal detection problems as problems of binary hypothesis testing in statistical inference, we get a convenient mathematical framework within which we can treat in a unified way the analysis and synthesis of signal detectors for different specific situations. The theory and results in mathematical statistics pertaining to binary hypothesis-testing problems are therefore of central importance to us in this book. In this first chapter we review some of these basic statistics concepts. In addition, we will find in this chapter some further results of statistical hypothesis testing with which the reader may not be as familiar, but which will be of use to us in later chapters.

We begin in Section 1.2 with a brief account of the basic concepts and definitions of hypothesis-testing theory, which leads to a discussion of most powerful tests and the Neyman-Pearson lemma in Section 1.3. In Section 1.4 this important result is generalized to yield the structures of locally optimum tests, which we will make use of throughout the rest of this book. Section 1.5 reviews briefly the Bayesian approach to construction of tests for hypotheses. We shall not be using the Bayesian framework very much except in Chapters 2 and 5, where we shall develop locally optimum Bayes' detectors for detection of known signals in additive noise.

In the last section of this chapter we will introduce a measure which we will make use of quite extensively in comparing the performances of different detectors for various signal detection problems in the following chapters. While we will give a more general discussion of the *asymptotic relative efficiency* and the *efficiency* in Section 1.6, these measures will be introduced and discussed in detail for the specific problem of detection of a known signal in additive noise in Section 2.4 of Chapter 2. Readers may find it beneficial to postpone study of Section 1.6 until after Chapter 2 has been read; they may then better appreciate the applicability of the ideas and results of this section.

1.2 Basic Concepts of Hypothesis Testing

Let $X = (X_1, X_2, \dots, X_n)$ be a random vector of observations with joint probability density function (pdf) $f(x|\theta)$, where θ is a parameter of the density function. Any specific realization $x = (x_1, x_2, \dots, x_n)$ of X will be a point in R^n , where R^n is the set of all real numbers. In binary hypothesis-testing problems we have to decide between one of two hypotheses, which we will label as H and K , about the pdf $f(x|\theta)$, given an observation vector $x \in R^n$. Let Θ be the set of all possible values of θ ; we usually identify H with one subset Θ_H of θ values and K with a disjoint subset Θ_K , so that $\Theta = \Theta_H \cup \Theta_K$. This may be expressed formally as

$$(1-1)$$

$$H: X \text{ has pdf } f(x|\theta) \text{ with } \theta \in \Theta_H$$

$$(1-2)$$

$$K: X \text{ has pdf } f(x|\theta) \text{ with } \theta \in \Theta_K$$

If Θ_H and Θ_K are made up of single elements, say θ_H and θ_K , respectively, we say that the hypotheses are *simple*; otherwise, the hypotheses are *composite*. If Θ can be viewed as a subset of R^p for a finite integer p , the pdf $f(x|\theta)$ is completely specified by the finite number p of real components of θ , and we say that our hypotheses are *parametric*.

A test for the hypothesis H against K may be specified as a partition of the sample space $S = R^n$ of observations into disjoint subsets S_H and S_K , so that x falling in S_H leads to acceptance of H , with K accepted otherwise. This may also be expressed by a test function $\delta(x)$ which is defined to have value $\delta(x) = 1$ for $x \in S_H$ and value $\delta(x) = 0$ for $x \in S_K$. The value of the test function is defined to be the probability with which the hypothesis K , the *alternative hypothesis*, is accepted. The hypothesis H is called the *null hypothesis*.

More generally, the test function can be allowed to take on probability values in the closed interval $[0,1]$. A test based on a test function taking on values inside $[0,1]$ is called a *randomized test*.

The power function $p(\theta|\delta)$ of a test based on a test function δ is defined for $\theta \in \Theta_H \cup \Theta_K$ as

$$p(\theta|\delta) = E\{\delta(X)|\theta\} \\ = \int_{R^n} \delta(x) f(x|\theta) dx \quad (1-3)$$

Thus it is the probability with which the test will accept the alternative hypothesis K for any particular parameter value θ . When

θ is in Θ_H , the value of $p(\theta|\delta)$ gives the probability of an error, that of accepting K when H is correct. This is called a *type I error*, and depends on the particular value of θ in Θ_H . The size of a test is the quantity

$$\alpha = \sup_{\theta \in \Theta_H} p(\theta|\delta) \quad (1-4)$$

which may be considered as being the best upper bound on the type I error probability of the test.

In signal detection the null hypothesis is often a noise-only hypothesis, and the alternative hypothesis expresses the presence of a signal in the observations. For a detector D implementing a test function $\delta(x)$ the power function evaluated for any θ in Θ gives a *probability of detection* of the signal. Thus in later chapters we will use the notation $p_d(\theta|D)$ for the power function of a detector D , and in discussing the probability of detection at a particular value of the parameter θ in Θ_K (or for a simple alternative hypothesis K) we will use it for the notation p_d . The size of a detector is often called its *false-alarm probability*. This usage is encountered specifically when the noise-only null hypothesis is simple, and the notation for this probability is p_f .

1.3 Most Powerful Tests and the Neyman-Pearson Lemma

Given a problem of binary hypothesis testing such as defined by (1-1) and (1-2), the question arises as to how one may define and then construct an optimum test. Ideally, one would like to have a test for which the power function $p(\theta|\delta)$ has values close to zero for θ in Θ_H , and has values close to unity for θ in Θ_K . These are, however, conflicting requirements. We can instead impose the condition that the size α of any acceptable test be no larger than some reasonable level α_0 , and subject to this condition look for a test for which $p(\theta|\delta)$, evaluated at a particular value θ_K of θ in Θ_K , has its largest possible value. Such a test is most powerful at level α_0 in testing H against K . The simple alternative $\theta_K = \theta_K$ in Θ_K ; its test function $\delta^*(x)$ satisfies

$$\sup_{\theta \in \Theta_H} p(\theta|\delta^*) \leq \alpha_0 \quad (1-5)$$

and

$$p(\theta_K|\delta^*) \geq p(\theta_K|\delta) \quad (1-6)$$

for all other test functions $\delta(x)$ of size less than or equal to α_0 . In most cases of interest a most powerful level α_0 test satisfies (1-5)

with equality, so that its size is $\alpha = \alpha_0$.

For a simple null hypothesis H when $\theta = \theta_0$ is the only parameter value in Θ_H , the condition (1-5) becomes $p(\theta_0 | \delta) \leq \alpha_0$ or $p_1 \leq \alpha_0$ subject to which p_1 at $\theta = \theta_0$ is maximized. For this problem of testing a simple H against a simple K , a fundamental result of Neyman and Pearson (called the Neyman-Pearson lemma) gives the structure of the most powerful test. We state the result here as a theorem:

Theorem 1: Let $g(x)$ be a test function of the form

$$g(x) = \begin{cases} 1, & \int x(x | \theta_K) > \int x(x | \theta_H) \\ r(x), & \int x(x | \theta_K) = \int x(x | \theta_H) \\ 0, & \int x(x | \theta_K) < \int x(x | \theta_H) \end{cases} \quad (1-7)$$

for some constant $r \geq 0$ and some function $r(x)$ taking on values in $[0, 1]$. Then the resulting test is most powerful at level equal to its size for H : $\theta = \theta_0$ versus K : $\theta = \theta_K$.

In addition to the above sufficient condition for a most powerful test it can be shown that conversely, if a test is known to be most powerful at level equal to its size, then its test function must be of the form (1-7) except perhaps on a set of x values of probability measure zero. Additionally, we may always require $r(x)$ in (1-7) to be a constant r in $[0, 1]$. Finally, we note that we are always guaranteed the existence of such a test for H versus K , of given size α [Lehmann, 1959, Ch. 3].

From the above result we see that generally the structure of a most powerful test may be described as one comparing a likelihood ratio to a constant threshold,

$$\frac{\int x(x | \theta_K)}{\int x(x | \theta_H)} > t \quad (1-8)$$

in deciding if the alternative K is to be accepted. If the likelihood ratio on the left-hand side of (1-8) equals the threshold value t , the alternative K may be accepted with some probability r (the randomization probability). The constants t and r may be evaluated to obtain a desired size α using knowledge of the distribution function of the likelihood ratio under H .

When the alternative hypothesis K is composite we may look for a test which is uniformly most powerful (UMP) in testing H against K , that is one which is most powerful for H against each $\theta = \theta_K$ in Θ_K . While UMP tests can be found in some cases,

notably in many situations involving Gaussian noise in signal detection, such tests do not exist for many other problems of interest. One option in such situations is to place further restrictions on the class of acceptable or admissible tests in defining a most powerful test; for example, a requirement of unbiasedness or of invariance may be imposed [Lehmann, 1959, Ch. 4-6]. As an alternative, other performance criteria based on the power function may be employed. We will consider one such criterion, leading to locally optimum or locally most powerful tests for composite alternatives, in the next section. One approach to obtaining reasonable tests for composite hypotheses is to use maximum-likelihood estimates $\hat{\theta}_H$ and $\hat{\theta}_K$ of the parameter θ , obtained under the constraints $\theta \in \Theta_H$ and $\theta \in \Theta_K$, respectively, in place of θ_0 and θ_K in (1-8). The resulting test is called a generalized likelihood ratio test or simply a likelihood ratio test (see, for example, [Bickel and Doksum, 1977, Ch. 6]).

1.4 Local Optimality and the Generalized Neyman-Pearson Lemma

Let us now consider the approach to construction of tests for composite alternative hypotheses which we will use almost exclusively in the rest of our development on signal detection in non-Gaussian noise. In this approach attention is concentrated on alternatives $\theta = \theta_K$ in Θ_K which are close, in the sense of a metric or distance, to the null-hypothesis parameter value $\theta = \theta_0$. Specifically, let θ be a real-valued parameter with value $\theta = \theta_0$ defining the simple null hypothesis and let $\theta > \theta_0$ define the composite alternative hypothesis. Consider the class of all tests based on test functions $g(x)$ of a particular desired size α for $\theta = \theta_0$ against $\theta > \theta_0$, and assume that the power functions $p(\theta | \delta)$ of these tests are continuous and also continuously differentiable at $\theta = \theta_0$. Then if we are interested primarily in performance for alternatives which are close to the null hypothesis, we can use as a measure of performance the slope of the power function at $\theta = \theta_0$, that is,

$$p'(\theta_0 | \delta) = p'(\theta | \delta) |_{\theta = \theta_0} = -\frac{d}{d\theta} p(\theta | \delta) |_{\theta = \theta_0} \quad (1-9)$$

From among our class of tests of size α , the test based on $\delta'(x)$ which uniquely maximizes $p'(\theta_0 | \delta)$ has a power function satisfying

$$p(\theta | \delta') \geq p(\theta | \delta), \quad \theta_0 < \theta < \theta_{max} \quad (1-10)$$

for some $\theta_{max} > \theta_0$. Such a test is called a *locally most powerful or locally optimum* (LO) test for $\theta = \theta_0$ against $\theta > \theta_0$. It is clearly of interest in situations such as the weak-signal case in signal detection, when the alternative-hypothesis parameter values of primary concern are those which define pdf's $f(x|\theta)$ close to the null-hypothesis noise-only pdf $f(x|\theta_0)$.

The following generalization of the Neyman-Pearson fundamental result of Theorem 1 can be used to obtain the structure of an LO test:

Theorem 2: Let $g(x)$ and $h_i(x)$, $i=1,2,\dots,m$, be real-valued and integrable functions defined on R^n . Let an integrable function $q(x)$ on R^n have the characteristics

$$q(x) = \begin{cases} 1 & , \quad g(x) > \sum_{i=1}^m t_i h_i(x) \\ r(x) & , \quad g(x) = \sum_{i=1}^m t_i h_i(x) \\ 0 & , \quad g(x) < \sum_{i=1}^m t_i h_i(x) \end{cases} \quad (1-11)$$

for a set of constants $t_i \geq 0$, $i=1,2,\dots,m$, and where $0 \leq r(x) \leq 1$. Define, for $i=1,2,\dots,m$, the quantities

$$\alpha_i = \int_{R^n} q(x) h_i(x) dx \quad (1-12)$$

Then from within the class of all test functions satisfying the m constraints (1-12), the function $q(x)$ defined by (1-11) maximizes $\int_{R^n} q(x) g(x) dx$.

A more complete version of the above theorem, and its proof may be found in [Lehmann, 1959, Ch. 3]; Ferguson [1967, Ch. 5] also discusses the use of this result.

To use the above result in finding an LO test for $\theta = \theta_0$ against $\theta > \theta_0$, defining Θ_H and Θ_X in (1-1) and (1-2), respectively, let us write (1-9) explicitly as

$$p'(\theta_0) = \frac{d}{d\theta} \int_{R^n} \frac{g(x)}{f(x|\theta_0)} f(x|\theta) dx \bigg|_{\theta=\theta_0} \\ = \int_{R^n} \frac{d}{d\theta} f(x|\theta) f(x|\theta_0) dx \bigg|_{\theta=\theta_0} \quad (1-13)$$

One type of problem for which Theorem 2 is useful in characterizing locally optimum tests is that of testing $\theta = \theta_0$ against the two-sided alternative hypotheses $\theta \neq \theta_0$. We have previously mentioned that one can impose the condition of unbiasedness on the allowable tests for a problem. Unbiasedness of a size- α test for the hypotheses H and K of (1-1) and (1-2) means that the test satisfies

assuming that our pdf's are such as to allow the interchange of the order in which limits and integration operations are performed. Taking $m=1$ and identifying $h_1(x)$ with $f(x|\theta_0)$ and $g(x)$ with $\frac{d}{d\theta} f(x|\theta)$ in Theorem 2, we are led to the locally optimum test which accepts the alternative K : $\theta > \theta_0$ when

$$\frac{\frac{d}{d\theta} f(x|\theta)}{f(x|\theta_0)} \bigg|_{\theta=\theta_0} > t \quad (1-14)$$

where t is the test threshold value which results in a size- α test satisfying

$$E(g(X) | H; \theta = \theta_0) = \alpha \quad (1-15)$$

The test of (1-14) may also be expressed as one accepting the alternative when

$$\frac{d}{d\theta} \ln(f(x|\theta)) \bigg|_{\theta=\theta_0} > t \quad (1-16)$$

Theorem 2 may also be used to obtain tests maximizing the second derivative $p''(\theta_0)$ at $\theta = \theta_0$. This would be appropriate to attempt if it so happens that $p'(\theta_0) = 0$ for all size- α tests for a given problem. The condition $p'(\theta_0) = 0$ will occur if $\frac{d}{d\theta} f(x|\theta) \big|_{\theta=\theta_0}$ is zero, assuming the requisite regularity conditions mentioned above. In this case Theorem 2 can be applied to obtain the locally optimum test accepting the alternative hypothesis K : $\theta > \theta_0$ when

$$\frac{\frac{d^2}{d\theta^2} f(x|\theta)}{f(x|\theta_0)} \bigg|_{\theta=\theta_0} > t \quad (1-17)$$

$$p(\theta|\delta) \leq \alpha, \text{ all } \theta \in \Theta_H$$

$$p(\theta|\delta) \geq \alpha, \text{ all } \theta \in \Theta_K$$

(1-18)

(1-19)

so that the detection probability for any $\theta_K \in \Theta_K$ is never less than the size α . For the two-sided alternative hypothesis $\theta \neq \theta_0$, suppose the pdf's $f(x|\theta)$ are sufficiently regular so that the power functions of all tests are twice continuously differentiable at $\theta = \theta_0$. Then it follows that for any unbiased size- α test we will have $p(\theta_0|\delta) = \alpha$ and $p'(\theta_0|\delta) = 0$. Thus, the test function of a locally optimum unbiased test can be characterized by using these two constraints and maximizing $p''(\theta_0|\delta)$ in Theorem 2. Another interpretation of the above approach for the two-sided alternative hypothesis is that the quantity $\omega = (\theta - \theta_0)$ may then be used as a measure of the distance of any alternative hypothesis from the null hypothesis $\theta = \theta_0$. We have

$$\begin{aligned} \frac{d}{d\omega} p(\theta|\delta) \Big|_{\omega=0} &= \frac{1}{2(\theta - \theta_0)} \frac{d}{d\theta} p(\theta|\delta) \Big|_{\theta=\theta_0} \\ &= -\frac{1}{2} p''(\theta_0|\delta) \end{aligned} \quad (1-20)$$

if $p'(\theta_0|\delta)$ is zero, for sufficiently regular pdf's $f(x|\theta)$. Thus if $p''(\theta_0|\delta)$ is zero for a class of size- α tests, then maximization of $p''(\theta_0|\delta)$ leads to a test which is locally optimum within that class.

1.5 Bayes Tests

In general statistical decision theory which can treat estimation and hypothesis-testing problems within a single framework, there are four fundamental entities. These are (a) the observation space, which in our case is \mathcal{R}^n ; (b) the set Θ of values of θ which parameterizes the possible distributions of the observations; (c) the set of all actions a which may be taken, the action space A ; and (d) the loss function $l(\theta, a)$, a real-valued function measuring the loss suffered due to an action a when $\theta \in \Theta$ is the parameter value. In a binary hypothesis-testing problem the action space A will have only two possible actions, a_1 and a_2 , which, respectively, represent acceptance of the hypotheses H and K ; and as a reasonable choice of loss function we can take

$$l(\theta, a) = c_{L1}, \quad \theta \in \Theta_H, \quad a = a_1 \quad (1-21)$$

where $J, L = H$ or K , the c_{L1} are non-negative, and $c_{L1} = 0$. What is sought is the decision rule $d(x)$ taking on values in A , which specifies the action to be taken when an observed x has been made. More generally we can permit randomized decisions $g(x)$ which for each x specify a probability distribution over A .

The performance of any decision rule $d(x)$ can be characterized by the average loss that is incurred in using it; this is the risk function

$$\begin{aligned} R(\theta, d) &= E\{l(\theta, d(x)|\theta)\} \\ &= \int_{\mathcal{R}^n} l(\theta, d(x)) f(x|\theta) dx \end{aligned} \quad (1-22)$$

The risk function for any given decision rule is nonetheless a function of θ , so that a comparison of the performances of different decision rules over a set of values of θ is not quite straightforward. A single real number serving as a figure of merit is assigned to a decision rule in Bayesian decision theory, to do that there is assumed to be available information leading to an *a priori* characterization of a probability distribution over Θ . We will denote the corresponding pdf as $\pi(\theta)$, and obtain the Bayes risk for a given prior density $\pi(\theta)$ and a decision rule $d(x)$ as

$$\begin{aligned} r(\pi, d) &= E\{R(\theta, d)\} \\ &= \int_{\mathcal{R}^n} R(\theta, d(x)) \pi(\theta) d\theta \end{aligned} \quad (1-23)$$

In the binary hypothesis-testing problem of deciding between Θ_H and Θ_K for θ in $f(x|\theta)$ [Equations (1-1) and (1-2)], the prior pdf $\pi(\theta)$ may be obtained as

$$\pi(\theta) = \pi_H \pi(\theta|H) + \pi_K \pi(\theta|K) \quad (1-24)$$

where π_H and π_K are the respective *a priori* probabilities that H and K are true ($\pi_H + \pi_K = 1$), and $\pi(\theta|H)$ and $\pi(\theta|K)$ are the conditional *a priori* pdf's over Θ , conditioned, respectively, on H and K being true. For the loss function of (1-21) this gives

$$\begin{aligned} r(\pi, d) &= \int_{\mathcal{R}^n} \int_{\mathcal{R}^n} l(\theta, d(x)) f(x|\theta) \pi(\theta) dx d\theta \\ &= \int_{\mathcal{R}^n} \int_{\mathcal{R}^n} l(\theta, d(x)) f(x|\theta) \left\{ \sum_{\theta \in \Theta_K} \pi_K \pi(\theta|K) \right\} d\theta dx \end{aligned} \quad (1-25)$$

For observations x for which $d(x) = \alpha_H$, the inner integral over θ becomes

$$\pi_K \alpha_{HK} \int_{\Theta_K} \int x(x | \theta) p(\theta | K) d\theta = \pi_K \alpha_{HK} / x(x | K) \quad (1-26)$$

where $\int x(x | K)$ is the conditional pdf of X given that the alternative hypothesis K is true. Similarly, for x such that $d(x) = \alpha_F$, the integral over Θ in (1-25) becomes $\pi_F \alpha_{FH} / x(x | H)$. Thus the Bayes rule minimizing $r(x, d)$ accepts the alternative hypothesis K when

$$\frac{\int x(x | K)}{\int x(x | H)} > \frac{\pi_H \alpha_{HF}}{\pi_K \alpha_{HK}} \quad (1-27)$$

When the likelihood ratio on the left-hand side above is strictly less than the threshold value on the right-hand side, the null hypothesis H is accepted by the Bayes rule. When equality holds $d(x)$ may specify any choice between α_F and α_K .

Note that for a test implementing Bayes' rule the threshold value is completely specified once the prior probabilities π_H and π_K and costs c_{ij} are fixed; the false-alarm probability does not enter as a consideration in setting the threshold. The development above assumed that $\pi(\theta | K)$ and $\pi(\theta | H)$ are available when the hypotheses are composite. As an alternative approach when Θ_K is composite, one can consider locally optimum Bayes' tests for which only the first few terms in a power series expansion of the likelihood ratio $\int x(x | \theta_K) / \int x(x | \theta_H)$ are used on the left-hand side of (1-27). Such an approach has been considered by Middleton [1966, 1964] and we will describe its application in a detection problem in Section 2.5 of the next chapter.

1.6 A Characterization of the Relative Performance of Tests

In this final section before we proceed to consider signal detection problems we will develop a relative-performance measure which is conveniently applied and which is at the same time of considerable value in obtaining simple quantitative comparisons of different tests or detectors. This measure is called the *asymptotic relative efficiency* and we will use it, together with a detector performance measure related to it called the *efficiency*, quite extensively in this book.

Let D_1 and D_2 be two detectors based on test statistics $T_1(X)$ and $T_2(X)$, respectively, so that the test function $h_i(X)$ of

D_1 is defined by

$$h_1(x) = \begin{cases} 1, & T_1(x) > t_1 \\ 0, & T_1(x) \leq t_1 \end{cases} \quad (1-28)$$

with a similar definition for $h_2(x)$, in terms of respective thresholds t_1 and t_2 and randomization probabilities r_1 and r_2 . Suppose the thresholds t_1 and t_2 (and the randomization probabilities r_1 and r_2 , if necessary) are designed so that both detectors have the same size or false-alarm probability $\pi_I = \alpha$. To compare the relative detection performance or power of the two detectors, one would have to obtain the power functions of the two detectors, that is, the detection probabilities would have to be computed for all $\theta \in \Theta_K$. Furthermore, such a comparison would only be valid for one particular value of the size, α , so that power functions would have to be evaluated at all other values of the size which may be of interest. In addition, while it has not yet been made very explicit, such a comparison can be expected to depend on the number of observation components n used by the detectors when n is a design parameter; for example, the observation components $X_i, i=1, 2, \dots, n$, may be identically distributed outcomes of repeated independent observations, forming a random sample of size n , governed by a univariate pdf $f_X(x | \theta)$.

In any event one would still be faced with the problem of expressing in a succinct and useful way the result of such a performance comparison. Of particular interest would be a real-valued measure which could be taken as an index of the overall relative performance of two tests or detectors. It would be even more appealing if such a measure could be computed directly from general formulas which would not require any explicit computation of families of power functions. As a step toward the definition of such a single index of relative performance, let us discuss a measure which is called the *relative efficiency* of two tests.

1.6.1 Relative Efficiency

Suppose that the number of observation components n in X is a variable quantity, so that any given detector has a choice of observation-vector size n that it can operate on for some given hypothesis-testing problem, namely testing $\theta \in \Theta_K$ against $\theta \in \Theta_H$ for θ in $f_X(x | \theta)$. For example, the linear detector test statistic is $\sum_{i=1}^n X_i$, and such a detector may be designed to operate on any sample size n . The situation which generally holds is that increasing n leads to improvement in the performance of a detector; for a fixed design value of the size α , for example, the detection

probability or power at any value of $\theta \in \Theta_K$ will increase with n . It is also generally true that there is a cost associated with the use of a larger number of observations, which in signal detection applications may mean a higher sampling rate, a longer observation time interval and therefore longer delay before a decision is made, or a heavier computational burden. Thus one measure of the relative performance of two tests or detectors in any given hypothesis-testing problem is obtained as a ratio of observation sizes required by the two procedures to attain a given level of performance.

Consider any specific alternative hypothesis defined by some θ_K in Θ_K , and let us consider detectors for $\theta \in \Theta_K$ against $\theta \in \Theta_K$ which are of size α and have detection probability $P_d = 1 - \beta$ for $\theta = \theta_K$, where the specified α and "miss" probability β are between 0 and 1. Let D_A and D_B be two detectors achieving this performance specification, based on respective observation vector lengths n_A and n_B . These observation vector lengths n_A and n_B are clearly functions of α , β and θ_K and are more explicitly expressed as $n_A(\alpha, \beta, \theta_K)$ and $n_B(\alpha, \beta, \theta_K)$, respectively.

The relative efficiency $RE_{A,B}$ of the detectors D_A and D_B is defined as the ratio

$$RE_{A,B} = \frac{n_B(\alpha, \beta, \theta_K)}{n_A(\alpha, \beta, \theta_K)} \quad (1-29)$$

This obviously depends on α , β and θ_K in general. In addition to this dependence of the value of $RE_{A,B}$ on the operating point $(\alpha, \beta, \theta_K)$, the computation of this quantity requires knowledge of the probability distribution functions of $T_A(X)$ and $T_B(X)$ for $\theta = \theta_K$. In order to alleviate this requirement, which is often difficult to meet, one could look at the asymptotic case where both n_A and n_B become large, with the expectation that the limiting distributions of the test statistics become Gaussian. It turns out that under the proper asymptotic formulation of the problem the relative efficiency converges to a quantity which is independent of α and β and is much easier to evaluate in practice.

1.6.2 Asymptotic Relative Efficiency and Efficacy

For $\theta = \theta_K$ a fixed parameter in the alternative hypothesis observation pdf $f(x|\theta)$, consider the sequence of observation vector lengths $n = 1, 2, \dots$. Almost without exception, tests of hypotheses used in applications such as signal detection have the property that, for fixed α , the power of the tests increase to a limiting value of unity (or $\beta \rightarrow 0$) for $n \rightarrow \infty$. Thus in seeking an asymptotic definition of relative efficiency this effect needs to be addressed. Let us first formalize this type of behavior by giving a

definition of the property of consistency of tests.

The H and K of (1-1) and (1-2) were stated for the pdf of a vector of length n of observations. Consider now a sequence $(\theta_n, n = 1, 2, \dots)$ of θ values in Θ_K , and the sequence of corresponding hypothesis-testing problems that we get for $n = 1, 2, \dots$

$$(1-30)$$

$$H_n: X \text{ has pdf } f(x|\theta) \text{ with } \theta \in \Theta_K$$

$$(1-31)$$

$$K_n: X \text{ has pdf } f(x|\theta_n)$$

Let $\{T_n(X), n = 1, 2, \dots\}$ be the sequence of test statistics, with $X = (X_1, X_2, \dots, X_n)$, of some detector type. This generally means that $T_n(X)$ for different n has a fixed functional form; for example, $T_n(X) = \sum_{i=1}^n X_i$. Now the sequence of individual detectors D_n based on the $T_n(X)$ (and corresponding threshold and randomization probabilities t_n and r_n , respectively) is asymptotically of size α in testing $\theta \in \Theta_K$ if

$$\lim_{n \rightarrow \infty} \sup_{\theta \in \Theta_K} E(\delta_n(X)|\theta) = \alpha \quad (1-32)$$

Here $\delta_n(X)$ is the test function obtained using the statistic $T_n(X)$. Such an asymptotically size- α sequence $\{D_n, n = 1, 2, \dots\}$ of detectors is said to be consistent for the sequence of alternatives $\{\theta_n, n = 1, 2, \dots\}$ if

$$\lim_{n \rightarrow \infty} P(\theta_n | \delta_n) = \lim_{n \rightarrow \infty} P(\theta_n | D_n) = 1 \quad (1-33)$$

We have remarked above that if θ_n is fixed to be some θ_K in Θ_K , sequences of most of the types of tests of interest to us will be consistent. In order to consider asymptotic situations where observation lengths n become large in relative efficiency considerations, one approach therefore is to define sequences of alternatives parameterized by the θ_n for which the limiting power is not unity but is a specified value $1 - \beta$ (with $0 < \beta < 1$). This clearly implies that the θ_n should approach a null-hypothesis parameter value as $n \rightarrow \infty$. We have stated earlier that the local case in hypothesis testing, where null- and alternative-hypothesis distributions of the observations approach one another, is of considerable interest to us since in many signal detection problems the weak-signal case is of particular concern. Thus we should expect that an asymptotic formulation of the hypothesis-testing problem will be quite useful, corresponding to a situation of a weak signal and a long observation record in signal detection.

Let us now focus on hypothesis-testing problems where the parameter θ is *real-valued*, and further constrain the null hypothesis to be *simple*. In particular, without loss of generality, let $\theta = 0$ be taken to describe the simple null hypothesis. Furthermore, let us consider the one-sided alternative hypothesis described by $\theta > 0$. We are now ready to show that an asymptotic version of the relative efficiency may be defined and computed quite readily for two tests, under some regularity conditions which are frequently satisfied.

Let $\{\theta_i, i=1,2,\dots\}$ be a sequence of alternative-hypothesis parameters converging to $\theta = 0$, and let $\{n_{A,i}\}$ and $\{n_{B,i}\}$ be two corresponding sequences of observation-vector lengths for two detector sequences $\{D_A\}$ and $\{D_B\}$, respectively, so that D_A uses $n_{A,i}$ observations X_i in testing $\theta = 0$ against $\theta = \theta_i$, and similarly, D_B uses an observation-vector length of $n_{B,i}$.

Definition: Let $\{D_A\}$ and $\{D_B\}$ be of asymptotic size α for $\theta = 0$, and let their limiting power values for $i \rightarrow \infty$ exist and be equal for the alternatives $\{\theta_i\}$,

$$\lim_{i \rightarrow \infty} P_A(\theta_i | D_A) = \lim_{i \rightarrow \infty} P_B(\theta_i | D_B) = 1 - \beta \quad (1-34)$$

with $0 < \beta < 1$. Then the *asymptotic relative efficiency* (ARE) of $\{D_A\}$ with respect to $\{D_B\}$ is defined by

$$ARE_{A,B} = \lim_{i \rightarrow \infty} \frac{n_{B,i}}{n_{A,i}} \quad (1-35)$$

provided that the limiting value in (1-35) is independent of α and β and of the particular sequences $\{\theta_i\}$, $\{n_{A,i}\}$, and $\{n_{B,i}\}$ satisfying (1-34).

The above definition of the ARE is clearly an asymptotic version of the relative efficiency. The main feature of this asymptotic definition is that we have considered a sequence of alternative-hypothesis parameter values which approach the null-hypothesis value $\theta = 0$, and corresponding observation-vector lengths which grow in such a way that the asymptotic powers become some value $1 - \beta$ between zero and unity. Note that we also require the ARE to be independent of the asymptotic size α of the detectors and of β . As we have remarked before, the detectors D_A (or D_B) are for different i members of a particular type of procedure having a common functional dependence of its test statistic on X_i , and we often speak of such a whole sequence of detectors as a detector D_A (or D_B).

Regularity Conditions

Consider a sequence of detectors $\{D_i\}$ based on a corresponding sequence of test statistics $\{T_i(X)\}$ with threshold sequence $\{c_i\}$. Let the detector sequence be of asymptotic size α , and let $\mu_i(\theta)$ and $\sigma_i^2(\theta)$ be the mean and variance, respectively, of $T_i(X)$ for $\theta \geq 0$. The following regularity conditions make computation of the ARE quite simple in many cases:

$$(i) \quad \frac{d}{d\theta} \mu_i(\theta) \Big|_{\theta=0} = \mu_i'(\theta) \text{ exists and is positive;}$$

$$(ii) \quad \lim_{i \rightarrow \infty} \frac{\mu_i'(\theta)}{\sqrt{n_i} \sigma_i(\theta)} = c > 0; \quad (1-36)$$

For $\theta_i = \gamma/\sqrt{n_i}$, with $\gamma \geq 0$,

$$(iii) \quad \lim_{i \rightarrow \infty} \frac{\mu_i'(\theta_i)}{\mu_i'(\theta)} = 1 \quad \text{and} \quad (1-37)$$

$$(iv) \quad [T_i(X) - \mu_i(\theta_i)]/\sigma_i(\theta_i) \text{ has asymptotically the standard normal distribution.} \quad (1-38)$$

If these regularity conditions are satisfied by two given detectors, we can show that their ARE can be computed quite easily. Notice that for conditions (iii) and (iv) above a particular rate of convergence of θ_i to zero is used, so that in making ARE evaluations using these conditions, we are assuming that this type of convergence of θ_i to zero. We should also remark that in many cases which will be of interest to us condition (iv) may be shown to hold; this is usually true in particular when $X = (X_1, X_2, \dots, X_n)$ is a vector of independent components and the test statistic $T_i(X)$ is the log of the likelihood ratio. The regularity conditions (i) - (iii) also hold for many test statistics of interest. The D_i being of asymptotic size α , it follows easily from condition (iv) that $|c_i - \mu_i(0)|/\sigma_i(0)$ converges to z_α where

$$\alpha = 1 - \Phi(z_\alpha) \quad (1-39)$$

Φ being the standard normal distribution function. We also get from the regularity conditions

$$\lim_{n \rightarrow \infty} \rho_n(\theta_0 | D_n) = \lim_{n \rightarrow \infty} \rho(T_n(X) > \epsilon_n | \theta_0) = 1 - \Phi(\epsilon_n - \gamma_n) \quad (1-40)$$

where ϵ was defined in (1-38) and $\theta_0 = \gamma/\sqrt{n}$. The quantity ϵ^2 is called the *efficacy*¹ ξ of the detector sequence $\{D_n\}$, which is therefore

$$\xi = \lim_{n \rightarrow \infty} \frac{\left[\frac{d}{d\theta} E(T_n(X) | \theta) \right]_{\theta=\theta_0}^2}{n \cdot V(T_n(X) | \theta)_{\theta=\theta_0}} \quad (1-41)$$

From these results we get the following theorem:

Theorem 3: Let D_A and D_B be asymptotic size- α detector sequences whose test statistics satisfy the regularity conditions (i) - (iv). Then the $ARE_{A,B}$ of D_A relative to D_B is

$$ARE_{A,B} = \frac{\xi_A}{\xi_B} \quad (1-42)$$

where ξ_A and ξ_B are the efficacies of D_A and D_B , respectively.

To prove this result, note that if $\gamma = \gamma_A > 0$ and $\gamma = \gamma_B > 0$ define the sequences of alternatives $\theta_n = \gamma/\sqrt{n}$ for D_A and D_B , respectively, then the detector sequences $\{D_{A,n}\}$ and $\{D_{B,n}\}$ have the same asymptotic power if

$$\gamma_A \xi_A^{1/2} = \gamma_B \xi_B^{1/2} \quad (1-43)$$

On the other hand, consider two subsequences $\{D_{A,i}\}$ and $\{D_{B,i}\}$ from $\{D_{A,n}\}$ and $\{D_{B,n}\}$, respectively, such that asymptotically, for $i \rightarrow \infty$,

$$\frac{\gamma_A}{\sqrt{n_{A,i}}} = \frac{\gamma_B}{\sqrt{n_{B,i}}} \quad (1-44)$$

where γ_A and γ_B satisfy (1-43). Then for $\theta_i = \gamma_A/\sqrt{n_{A,i}}$ both $\{D_{A,i}\}$ and $\{D_{B,i}\}$ have the same limiting power as $i \rightarrow \infty$, given by (1-40) with $\gamma = \gamma_A \xi_A^{1/2} = \gamma_B \xi_B^{1/2}$. From (1-43) and (1-44), and the definition (1-35), the result of Theorem 3 follows easily.

¹ The quantity ξ itself is usually called the efficacy in statistics.

Thus we find that, subject to the regularity conditions (i) - (iv) the ARE of two detectors can be computed quite simply as a ratio of their efficacies; the efficacy of a detector is obtained from (1-41), which can be seen to require derivation of the means and variances only of the test statistics. We will be basing most of our performance comparisons in this book on the ARE, so that in the following chapters we will apply Theorem 3 and (1-41) many times. In the next chapter we will enter into a further discussion of the ARE for the special case of detection of known signals in additive noise, which will serve to illustrate more explicitly the ideas we have developed here.

Extended Regularity Conditions

As a generalization of the above results, we can consider the following extended versions of the conditions (i) - (iv):

$$(i') \quad \frac{d^i}{d\theta^i} \mu_n(\theta) \Big|_{\theta=\theta_0} = \mu_n^{(i)}(\theta_0) = 0, \quad i=1,2,\dots,m-1,$$

and

$$\mu_n^{(m)}(\theta_0) > 0$$

for some integer m ;

$$(ii') \quad \lim_{n \rightarrow \infty} \frac{\mu_n^{(m)}(\theta_0)}{n^{m/2} \sigma_n(\theta_0)} = c > 0 \quad (1-45)$$

for some $c > 0$;

For $\theta_n = \gamma/\sqrt{n}$, with $\gamma \geq 0$,

$$(iii') \quad \lim_{n \rightarrow \infty} \frac{\mu_n^{(m-1)}(\theta_n)}{\mu_n^{(m)}(\theta_0)} = 1 \quad (1-46)$$

and

$$\lim_{n \rightarrow \infty} \frac{\sigma_n(\theta_n)}{\sigma_n(\theta_0)} = 1; \quad (1-47)$$

(iv) $[T_s(X) - \mu_s(\theta_s)]/\sigma_s(\theta_s)$ has asymptotically the standard normal distribution.

If we now define the efficacy by

$$\xi = \lim_{n \rightarrow \infty} \frac{1}{n} \left[\frac{\mu_s^*(0)}{\sigma_s(0)} \right]^{1/m} \quad (1-48)$$

the ARE of two detectors satisfying the regularity conditions (iv) - (iv') for a common θ and the same value of m can again be obtained as a ratio of their efficacies. Note that $m=1$ and $\delta m/2$ is the case we considered first; it is the most commonly occurring case.

While we have focused on the case of alternatives $\theta > 0$, it should be quite clear that for alternatives $\theta < 0$ exactly the same results hold, which can be established by reparameterizing with $\theta_s = -\theta$.

The extended results above also allow consideration of certain tests for the two-sided alternatives $\theta \neq 0$. For detailed discussions of the asymptotic comparisons of tests the reader may consult the book by Kendall and Stuart [1967]. The original investigation of this type of asymptotic performance evaluation was made by Pitman [1948] and generalized by Noether [1955].

The Multivariate Case

In the discussion above of the efficacy of a test and of the ARE of two tests we required that the distributions of the test statistics be asymptotically normal. A careful examination of the above development reveals, however, that it is not the asymptotic normality of the test statistics which is the key requirement. What is needed to obtain the ARE of two tests is that their test statistics have the same functional form for their asymptotic distributions, so that the asymptotic powers of the two tests based on them can be made the same by proper choice of the sample sizes. Later in this book we will consider test statistics which may be expressed as quadratic forms having asymptotically the χ^2 distribution. Let us therefore extend our definition of the efficacy of a test to allow us to treat such cases.

Consider a sequence $\{T_s(X)\}$ of multivariate statistics with

$$T_s(X) = [T_{1s}(X), T_{2s}(X), \dots, T_{Ls}(X)] \quad (1-49)$$

Let the means and variances of the components for $\theta \geq 0$ be

$$E(T_{js}(X) | \theta) = \mu_{js}(\theta), \quad j = 1, 2, \dots, L \quad (1-50)$$

$$V(T_{js}(X) | \theta) = \sigma_{js}^2(\theta), \quad j = 1, 2, \dots, L \quad (1-51)$$

and let the covariances for $\theta \geq 0$ be

$$\text{COV}(T_{js}(X), T_{ks}(X) | \theta) = \rho_{jks}(\theta) \sigma_{js}(\theta) \sigma_{ks}(\theta) \quad (1-52)$$

so that $\rho_{jks}(\theta)$ is the normalized covariance or coefficient of correlation. We now impose the multivariate versions of the extended regularity conditions given above for the scalar case:

$$(i)'' \quad \frac{d^i}{d\theta^i} \mu_{js}(\theta) \Big|_{\theta=0} = \mu_{js}^{(i)}(0)$$

$$= 0, \quad i = 1, 2, \dots, m-1$$

and

$$\mu_{js}^{(m)}(0) > 0$$

for some integer m , for $j = 1, 2, \dots, L$;

$$(ii)'' \quad \lim_{s \rightarrow \infty} \frac{\mu_{js}^{(m)}(0)}{s^m \sigma_{js}^{(m)}(0)} = c_j > 0 \quad (1-53)$$

for some $\delta > 0$, for $j = 1, 2, \dots, L$;

For $\theta_s = -\gamma/\theta_s$, with $\gamma \geq 0$,

$$(iii)'' \quad \lim_{s \rightarrow \infty} \frac{\mu_{js}^{(m)}(\theta_s)}{s^m \sigma_{js}^{(m)}(0)} = 1 \quad (1-54)$$

$$\lim_{s \rightarrow \infty} \frac{\sigma_{js}^2(\theta_s)}{s^2 \sigma_{js}^2(0)} = 1 \quad (1-55)$$

and

$$\lim_{s \rightarrow \infty} \frac{\rho_{jks}(\theta_s)}{s^2 \rho_{jks}(0)} = 1 \quad (1-56)$$

for $k, j = 1, 2, \dots, L$;

$(i)^m$ the $[T_n(X) - \mu_n(\theta)]/\sigma_n(\theta)$, for $j = 1, 2, \dots, L$, have asymptotically a multivariate normal distribution.

Let us define the normalized versions $Q_n(X, \theta)$ of the components $T_n(X)$ of the multivariate statistics as

$$Q_n(X, \theta) = \frac{T_n(X) - \mu_n(\theta)}{\sigma_n(\theta)}, \quad j = 1, 2, \dots, L \quad (1-57)$$

and let $Q_n(X, \theta)$ be the row vector of components $Q_n(X, \theta)$. Now a real-valued statistic of particular interest is that defined by the quadratic form

$$U_n(X) = Q_n(X, \theta) R_n^{-1}(\theta) Q_n(X, \theta)' \quad (1-58)$$

where the matrix $R_n(\theta)$ is the normalized $L \times L$ covariance matrix of elements $\rho_{jn}(\theta)$. Under the null hypothesis $\theta = 0$ this statistic has asymptotically a χ^2 distribution with L degrees of freedom. To obtain its limiting distribution under the alternatives $\theta_n = \eta/n$, note that $Q_n(X, \theta)$ can be expressed as

$$Q_n(X, \theta) = Q_n(X, \theta_n) \frac{\sigma_n(\theta_n)}{\sigma_n(0)} + \frac{\mu_n(\theta_n) - \mu_n(0)}{\sigma_n(0)} \quad (1-59)$$

so that it is asymptotically equivalent to $Q_n(X, \theta_n) + (\gamma^m/m) e_j$, where e_j was defined by (1-53) in $(i)^m$. Using condition $(iv)^m$, we conclude finally that $U_n(X)$ has asymptotically a non-central χ^2 distribution with L degrees of freedom under the sequence of alternative hypotheses defined by $\theta_n = \eta/n$. The non-centrality parameter in this distribution is

$$\Delta = \frac{\gamma^m}{(m)^2} c R^{-1} c' \quad (1-60)$$

where $c = (c_1, c_2, \dots, c_L)$ and $R = \lim_{n \rightarrow \infty} R_n(0)$.

Suppose we have two tests based on L -variate quantities $T_{1,n}(X)$ and $T_{2,n}(X)$ satisfying the multivariate extended regularity conditions $(i)^m - (iv)^m$. Let their respective vectors c of individual efficacy components be denoted as c_1 and c_2 , and let their respective limiting normalised covariance matrices be R_1 and R_2 . Assume further that the conditions $(i)^m - (iv)^m$ are satisfied for the same values of m and δ by both sequences of statistics, and consider the quadratic form test statistics defined by (1-58) for each

of the two tests. It follows exactly as in the scalar cases treated above that for the same sequence of alternatives $\theta_n = \eta/n$, the $ARE_{1,2}$ of the two tests is

$$ARE_{1,2} = \left[\frac{c_1 R_1^{-1} c_1'}{c_2 R_2^{-1} c_2'} \right]^{1/(p-m)} \quad (1-61)$$

We may therefore define the *generalized efficacy* of a test based on a quadratic form statistic satisfying our assumptions $(i)^m - (iv)^m$ as

$$\xi = [c R^{-1} c']^{1/(p-m)} \quad (1-62)$$

Notice that this reduces to the efficacy defined by (1-48) for the scalar case $L=1$, and further to the efficacy defined by (1-41) when $m=1$ and $\delta=1/2$.

PROBLEMS

Problem 1.1

X_1, X_2, \dots, X_n are independent real-valued observations governed by the pdf

$$f(z|\theta) = \theta z^{1-\theta}, \quad 0 \leq z \leq 1$$

where the parameter θ has a value in $[1, \infty)$.

(a) Find the form of the best test for $H: \theta = \theta_0$ versus $K: \theta = \theta_1$. Show that the test can be interpreted as a comparison of the sum of a nonlinear function of each observation component to a threshold.

(b) Determine explicitly the best test of size $\alpha = 0.1$ for $\theta = 2$ versus $\theta = 3$. Is the test uniformly most powerful for testing $\theta = 2$ versus $\theta > 2$?

Problem 1.2

An observation X has pdf

$$f_X(z|\theta) = \frac{\alpha}{2} e^{-\alpha|z-\theta|}, \quad -\infty < z < \infty$$

where $\alpha > 0$ is known. Consider size α tests, $0 < \alpha < 1$, for $\theta = 0$ versus $\theta > 0$ based on the single observation X .

- Show that a test which rejects $\theta = 0$ when $X > t$ is uniformly most powerful for $\theta > 0$.
- Show that a test which rejects $\theta = 0$ with probability γ when $X > 0$ is also a locally optimum test for $\theta > 0$.
- Sketch the power functions of these two tests. Verify that they have the same slope at $\theta = 0$.

Problem 1.3

$X = (X_1, X_2, \dots, X_n)$ is a vector of independent and identically distributed observations, each governed by the pdf

$$f(z | \theta, \sigma) = \sigma^{-1} e^{-|z-\theta|/\sigma}, \quad \theta < z < \infty$$

where θ and σ are real-valued parameters. We want to test the simple null hypothesis $H: \theta = \theta_0, \sigma = \sigma_0$ against the simple alternative hypothesis $K: \theta = \theta_1 \leq \theta_0, \sigma = \sigma_1 > \sigma_0$.

- Find in its simplest form the best test for H versus K . Let the alternative hypothesis K_1 be defined by $K_1: \theta \leq \theta_0, \sigma > \sigma_0$. Is your test uniformly most powerful for K_1 ?
- Let K_2 be the alternative hypothesis $\theta = \theta_0, \sigma > \sigma_0$. Is the above test uniformly most powerful for K_2 ?
- Obtain the generalized likelihood ratio test for H versus K_0 and compare it with your test found in (a).

Problem 1.4

$X = (X_1, X_2, \dots, X_n)$ is a vector of independent and identically distributed components, each being Gaussian with mean μ and variance σ^2 . For testing $H: \sigma^2 = 1, \mu$ unspecified, versus $K: \sigma^2 \neq 1, \mu$ unspecified, obtain the form of the generalized likelihood ratio test. Show that the test reduces to deciding if a particular test statistic falls inside some interval. Explain how the end points of the interval can be determined to obtain a specified value for the size α .

Problem 1.5

$X = (X_1, X_2, \dots, X_n)$ is a vector of independent and identically distributed Gaussian components, each with mean θ and variance σ^2 .

- Let \bar{X} be the sample mean $\sum_{i=1}^n X_i/n$. For testing $\theta = 0$ versus $\theta \neq 0$, show that the test which rejects $\theta = 0$ when $|\bar{X}|$ exceeds a threshold is uniformly most powerful unbiased of its size. (Use Theorem 2.)

Problem 1.6

Given n independent and identically distributed observations X_i governed by a unit-variance Gaussian pdf with mean θ , a test for $\theta = 0$ versus $\theta > 0$ may be based on the test statistic $\sum_{i=1}^n X_i$.

Another possible test statistic for this problem is $\sum_{i=1}^n X_i^2$. Obtain the efficacies for these two tests, for suitable sequences of alternatives (θ_n) converging to 0, verifying that the regularity conditions (i) - (iv) or (i') - (iv') are satisfied. What can you say about the ARE of these two tests?

Problem 1.7

For the Cauchy density function

$$f(z | \theta) = \frac{1}{\pi} \frac{1}{1 + (z - \theta)^2}$$

with location parameter θ , a test for $\theta = 0$ versus $\theta > 0$ may be based on the median of n independent observations. Using results on the distributions of order statistics, obtain the efficacy of this test.

Problem 1.8

Independent observations X_1, X_2, \dots, X_n are governed by a common pdf f which is unimodal and symmetric about its location value θ . The pdf f has a finite variance σ^2 . Show that the ARE of the test for $\theta = 0$ based on the sample median relative to that based on the sample mean is $\sigma^2/f(0)$. This result is independent of the scale parameter σ . Obtain its minimum value, and the corresponding unimodal symmetric pdf for which this minimum value of the ARE is achieved.

Chapter 2

DETECTION OF KNOWN SIGNALS IN ADDITIVE NOISE

2.1 Introduction

In this chapter we will begin our description of signal detection schemes for non-Gaussian noise by considering one of the simplest to formulate and most commonly encountered of all detection problems. This is the detection of a real-valued deterministic signal which is completely known in a background of additive noise. We shall be concerned exclusively with discrete-time detection problems in this book. In many applications discrete-time observations are obtained by sampling at a uniform rate some underlying continuous-time observation process. In the next section we will give the example of detection of a pulse train in additive noise to illustrate how a discrete-time detection problem may arise in a different manner from an original problem formulation in the continuous-time domain.

To obtain canonical results for the detector structures we will focus on the case of weak-signal detection when a large number of observation values are available, so that local expansions and asymptotic approximations can be used. We will then explain how the asymptotic performances of different detectors may be compared. In addition, we will discuss the value of such asymptotic performance comparison results for comparisons of performance in non-asymptotic cases of finite-length observation sequences and non-vanishing signal strengths.

Most of this development is for the detection problem in which the observations represent either noise only or a signal with additive noise. A common and important example of such a detection requirement is to be found in radar systems. In the communication context this detection requirement occurs in the case of on-off signaling. Furthermore, our development will be based primarily on the Neyman-Pearson approach, in which the performance criterion is based on the probability of correct detection for a fixed value of the probability of false detection or false alarm. In the penultimate section, however, we briefly discuss the case of binary signaling and the weak-signal version of the Bayes detector.

2.2 The Observation Model

For the known-signal-in-additive-noise detection problem we may describe our observation vector $\mathbf{X} = (X_1, X_2, \dots, X_n)$ of real-

valued components X_i by

$$X_i = s_i + W_i, \quad i = 1, 2, \dots, n \quad (2-1)$$

Here the W_i are random noise components which are always present, and the s_i are the known values of the signal components. The signal amplitude θ is either zero (the observations contain no signal) or positive, and the detection problem is to decide on the basis of \mathbf{X} whether we have $\theta = 0$ or we have $\theta > 0$.

2.2.1 Detection of a Pulse Train

As we have mentioned above, the X_i may be samples obtained from some continuous-time observation process. One such example occurs in the detection of a pulse train with a known pattern of amplitudes for the otherwise identical pulses in the train. For instance, the signal to be detected may be the bipolar pulse train depicted in Figure 2.1. In this case the X_i could be samples taken at the peak positions of the pulses (if present) from a noisy observed waveform. Alternatively, the X_i could be the outputs at specific time instants of some pre-detection processor, such as a filter matched to the basic pulse shape. It will be useful to consider a little more explicitly this mechanism for generating the observations X_i , before we continue with the model of (2-1).

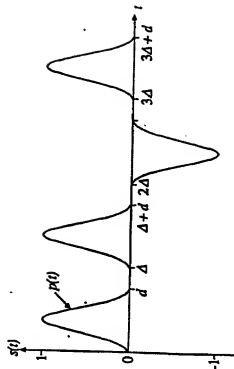


Figure 2.1 Bipolar Pulse Train

Let $p(t)$ be the basic pulse shape in Figure 2.1, defined to be zero outside the interval $[0, \Delta]$. The train of n such non-overlapping pulses may be described by

$$s(t) = \sum_{i=1}^n \epsilon_i p(t - i\Delta) \quad (2-2)$$

where ϵ_i is the known amplitude of the i -th pulse. In Figure 2.1 the amplitudes ϵ_i are all 1 or -1. The received continuous-time observation process $X(t)$ may be expressed as

$$X(t) = s(t) + W(t), \quad T_0 \leq t \leq T_1 \quad (2-3)$$

Now $W(t)$ is an additive continuous-time random noise process. In (2-3) the observation interval $[T_0, T_1]$ includes the signal interval $[0, n\Delta]$.

Let the noise process $W(t)$ have zero mean and let it be wide-sense stationary with power spectral density $\Phi_W(\omega)$, and let $P(\omega)$ be the Fourier transform of the pulse $p(t)$. Suppose we wanted to find that linear processor which maximizes its output signal-to-noise ratio (SNR) at time $t = n\Delta$, the end of the pulse train, when the input is $X(t)$. The solution is the well-known matched filter, which is specified to have frequency response

$$\hat{H}_M(\omega) = \frac{\sum_{i=1}^n \epsilon_i P^*(\omega) e^{-j\omega(i-\Delta)}}{\Phi_W(\omega)} e^{-j\omega n\Delta} \quad (2-4)$$

(Strictly speaking, this is the correct solution for long observation intervals.) The numerator above (without the delay term $e^{-j\omega n\Delta}$) is the Fourier transform of $s(-t)$. From the above we find that

$$\begin{aligned} \hat{H}_M(\omega) &= \frac{P^*(\omega) e^{-j\omega n\Delta}}{\Phi_W(\omega)} \sum_{i=1}^n \epsilon_i e^{-j\omega(i-\Delta)} \\ &= \hat{H}_M(\omega) \sum_{i=1}^n \epsilon_i e^{-j\omega(i-\Delta)} \end{aligned} \quad (2-5)$$

where $\hat{H}_M(\omega)$ is the frequency response of the filter matched for a single pulse $p(t)$, maximizing output SNR for this case at time $t = \Delta$.

Thus the maximum output SNR linear filter can be given the system interpretation of Figure 2.2. Here the output of the single-pulse matched filter is sampled at times $t = i\Delta$, $i = 1, 2, \dots, n$, the i -th sampled value X_i is multiplied by ϵ_i , and

the products summed together to form the final output. Because the input to the system is composed of additive signal and noise terms, the sampled values X_i consist of additive signal and noise components. We can denote the noise components as the W_i , and the signal components may be denoted as s_i . From (2-3) we see that the ϵ_i here are the outputs of the single-pulse matched filter at times $t = i\Delta$, when the input is the pulse train $s(t)$ of (2-2).




Figure 2.2 Linear System Maximizing Output SNR in Pulse Train Detection

If the noise process $W(t)$ in (2-3) is Gaussian, the system of Figure 2.2 leads to the optimum scheme for signal detection, that is for testing the null hypothesis that $\theta = 0$ versus the alternative that $\theta > 0$. This is one of the central results of classical signal detection theory for Gaussian noise. The optimum detector uses the output of the linear system of Figure 2.2 as the test statistic, and compares it to a threshold to make a decision regarding the presence or absence of the signal.

The optimum detection scheme of Figure 2.2 can be given a particularly useful interpretation under some assumptions on the nature of the pulse train $s(t)$ and on the noise spectral density function $\Phi_W(\omega)$. Consider first the case where the noise is white, with a flat spectral density $\Phi_W(\omega) = N_0/2$. Then the impulse response $h_M(t)$ of the single-pulse matched filter is simply

$$h_M(t) = \frac{\rho}{N_0} p(\Delta - t) \quad (2-6)$$

which is zero outside the interval $[0, \Delta]$, since $p(t)$ is confined entirely to this interval for non-overlapping pulses in $s(t)$. The covariance function $\rho_{MM}(t)$ of the noise process at the output of the matched filter is then

$$\rho_{MM}(t) = \frac{N_0}{2} h_M(t) * h_M(-t) \quad (2-7)$$

which is therefore zero for $|t| \geq \Delta$. Thus the noise components W_i are uncorrelated, and hence independent for Gaussian noise.

More generally, the spectral density $\Phi_W(\omega)$ of the noise at the output of the single-pulse matched filter is

$$\begin{aligned}\Phi_W(\omega) &= \Phi_W(\omega) |H_M(\omega)|^2 \\ &= P(\omega) \frac{P'(\omega)}{\Phi_W(\omega)}\end{aligned}\quad (2-8)$$

so that

$$P_M(t) = p(t) * h_M(t + \Delta) \quad (2-9)$$

Now the basic pulse $p(t)$ may in general occupy only a portion of the period Δ of the pulse train; let us therefore consider the case where $p(t)$ is non-zero only on the interval $[0, d]$, with $d \leq \Delta$. If the noise is not white the impulse response $h_M(t)$ of the single-pulse matched filter may have an effective duration which is larger than d . Let us now impose the condition, which will usually be satisfied for narrow pulses at least, that $h_M(t)$ is essentially zero outside of an interval of length $\Delta + (\Delta - d) = \Delta + \beta$. An examination of the functions shown in Figure 2.3 reveals that $p_M(t)$ will then be essentially zero for $|t| \geq \Delta$, so that we may again assume that the noise components W_i are uncorrelated and therefore independent for Gaussian noise. Under the same assumption the signal components s_i at the matched filter outputs will be simply

$$\begin{aligned}s_i &= c_i \int_0^d p(t) h_M(\Delta - t) dt \\ &= \frac{1}{2\pi} \int_{-\infty}^{\infty} \frac{P(\omega)}{\Phi_W(\omega)} d\omega\end{aligned}\quad (2-10)$$

We may assume without any loss of generality that the pulse $p(t)$ has been defined with a scale factor making the quantity multiplying c_i in (2-10) equal to unity. We can then describe the samples X_i as

$$X_i = s_i + W_i \quad (2-11)$$

where the W_i are independent and identically distributed (i.i.d.) zero-mean Gaussian random variables.

The system of Figure 2.2 can be interpreted as being composed of two parts, a single-pulse matched filter generating the X_i and a linear correlator detector forming the test statistic by correlating the X_i with the c_i . Of course it is well-known that for X_i

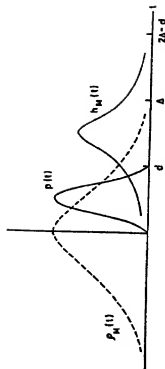


Figure 2.3 Filter Impulse Response and Output Autocovariance Function, of Matched Filter for Pulse Train Detection

given by (2-11) with i.i.d. Gaussian noise the linear-correlator detector is the uniformly most powerful (UMP) detector for $d > 0$.

What we have seen so far is that the linear processor maximizing the output SNR in detection of a pulse train may be considered quite generally to be operating on a set of intermediate observations X_i which are modeled by (2-1). Under a specific condition on the pulse and spectral density characteristics, the W_i in (2-1) are uncorrelated noise terms. If the noise process $W(t)$ is not Gaussian, the maximum output SNR scheme will not lead to an optimum detector. However, explicit solutions for the optimum filter for SNR optimization is a common, simple, and generally well-founded engineering technique, and it usually makes good sense to continue to use it to generate the intermediate observations X_i even when the input noise is not Gaussian. However, as discussed at the end of Section 3.3 in Chapter 3, the use of linear prediction filtering is not appropriate when the noise process $W(t)$ contains impulsive non-Gaussian components. In the following development we will concentrate on the best use of the X_i modeled by (2-1) when the noise components W_i are not Gaussian.

2.2.2 Statistical Assumptions

Although the detection of a pulse train is only a particular example we choose to focus on, it illustrates the importance of the basic model of (2.1). We will now become more specific, and assume that the W_i form a sequence of i.i.d. random variables.

Their common univariate cumulative distribution function (cdf) will be denoted by F . Note that even though we do not require that F be Gaussian, we will assume that the W_i are independent. We will make some regularity assumptions about F that are generally met for all cases of interest. For future reference we will call these *Assumptions A*:

- A. (i) F is absolutely continuous, so that a probability density function (pdf) f exists for the W_i ;
- (ii) f is absolutely continuous, so that its derivative $\frac{df(x)}{dx} = f'(x)$ exists for almost all x ;
- (iii) f' satisfies $\int_{-\infty}^{\infty} |f'(x)| dx < \infty$.

Assumptions A (i) and A (ii) are smoothness assumptions, and A (iii) is a technical requirement. These assumptions will allow us to justify certain mathematical operations, such as interchanges in the order of differentiation with respect to a parameter and integration of a function, although for the most part we will not provide details of such proofs.

This is also an appropriate place to introduce a second assumption, which we will call *Assumption B*:

$$B. \quad I(f) \triangleq \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \left[\frac{f'(x)}{f(x)} \right]^2 f(x) dx < \infty \quad (2-12)$$

The quantity $I(f)$ is called *Fisher's information* for location shift, and the above assumption says that f has finite Fisher's information for location shift. The significance of $I(f)$ will become clear later in this chapter. We will find that this assumption is also satisfied by most noise density functions of interest. Notice that Assumption B implies that $f'(x)/f(x)$ has a finite variance under the noise-only condition $\theta = 0$; its mean value then is zero.

In this book we are concerned with problems where the noise density function f is completely specified, as a special case of the general parametric problem where f may have a finite number of unknown parameters (such as the noise variance). Our detection problem can be formulated as a statistical hypothesis-testing problem of choosing between a null hypothesis H_0 and an alternative hypothesis K_1 , describing the joint density function $f(x)$ of the

observation vector X , with

$$H_1: f(x) = \prod_{i=1}^n f(x_i) \quad (2-13)$$

$$K_1: f(x) = \prod_{i=1}^n f(x_i - \theta_i), \text{ a specified, any } \theta > 0 \quad (2-14)$$

Here x is the vector (x_1, x_2, \dots, x_n) of signal components. Note that we are considering parametric hypotheses which completely define $f(x)$ to within a finite number of unknown parameters (here with only $\theta > 0$ unknown under the alternative hypothesis). Let us now proceed to obtain the structures of tests for H_1 versus K_1 .

2.3 Locally Optimum Detection and Asymptotic Optimality

Since the alternative hypothesis K_1 is not a simple hypothesis, the signal amplitude value being unspecified, we cannot apply directly the fundamental lemma of Neyman and Pearson to obtain the structure of the optimum detector for our detection problem. For non-Gaussian noise densities it is also generally impossible to obtain UMP tests for the composite alternative hypothesis K_1 .

To illustrate the difficulty, consider the special case where f is specified to be the double-exponential noise density function defined by

$$f(x) = \frac{\sigma}{2} e^{-\sigma |x|}, \sigma > 0 \quad (2-15)$$

The likelihood ratio for testing H_1 versus K_1 , for a particular value $\theta = \theta_0 > 0$, is

$$L(X) = \prod_{i=1}^n \frac{f(x_i - \theta_0)}{f(x_i)} \quad (2-16)$$

This now becomes

$$L(X) = e^{-\frac{\sigma}{2} \sum_{i=1}^n (|x_i - \theta_0| - |x_i|)} \quad (2-17)$$

giving

$$\ln L(X) = \frac{\sigma}{2} \sum_{i=1}^n (|x_i| - |x_i - \theta_0|) \quad (2-18)$$

Thus for given $\theta = \theta_0$, the test based on

$$\hat{\lambda}(X) = \sum_{i=1}^n (|X_i| - |X_i - \theta_{0i}|) \quad (2-19)$$

is an optimum test, since the constant a is positive. The optimum detector therefore has a test function defined by

$$q(X) = \begin{cases} 1, & \hat{\lambda}(X) > t \\ r, & \hat{\lambda}(X) = t \\ 0, & \hat{\lambda}(X) < t \end{cases} \quad (2-20)$$

where the threshold t and randomization probability r are chosen to obtain the desired value for the false-alarm probability P_f , so that the equation

$$E\{q(X) | H_1\} = P_f \quad (2-21)$$

is satisfied. Notice that we do not need randomization at $\hat{\lambda}(X) = t$ if this event has zero probability under H_1 .

We can express $\hat{\lambda}(X)$ of (2-19) in the form

$$\hat{\lambda}(X) = \sum_{i=1}^n l(X_i; \theta_{0i}) \quad (2-22)$$

where the characteristic l is defined by

$$l(x; \theta) = |x| - |x - \theta| \quad (2-23)$$

This is shown in Figure 2.4 as a function of x and depends strongly on θ , so that $\hat{\lambda}(X)$ cannot be expressed in a simpler form decoupling θ_0 and the X_i . For an implementation of the test statistic $\hat{\lambda}(X)$ the value θ_0 of θ must be known, and a UMP test does not exist for this problem for $n > 1$.

One approach we might take in the above case is to use a generalized likelihood ratio (GLRT) test, here obtained by using as the test statistic $\hat{\lambda}(X)$ of (2-19) with θ_0 replaced by its maximum likelihood (ML) estimate under the alternative hypothesis K_1 . This maximum-likelihood estimate $\hat{\theta}_{ML}$ is given implicitly as the solution of the equation

$$\sum_{i=1}^n x_i \operatorname{sgn}(X_i - \hat{\theta}_{ML}) = 0 \quad (2-24)$$

where

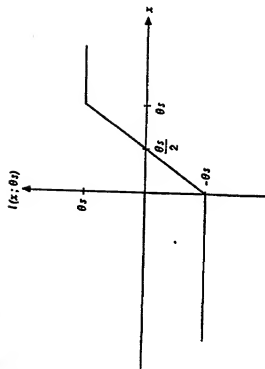


Figure 2.4 The Characteristic $l(x; \theta)$ of Equation (2-23)

$$\operatorname{sgn}(x) = \begin{cases} 1, & x > 0 \\ 0, & x = 0 \\ -1, & x < 0 \end{cases} \quad (2-25)$$

provided that the solution turns out to be non-negative; otherwise, $\hat{\theta}_{ML} = 0$ (Problem 2.1). Thus the implementation of the GLR test is not simple. In addition, the distribution of the GLR test statistic under the null hypothesis is not easily obtained.

In the general case, for any noise density function f , the optimum detector for given $\theta = \theta_0 > 0$ under K_1 can be based on the test statistic

$$\begin{aligned} \lambda(X) &= \ln L(X) \\ &= \sum_{i=1}^n \ln \frac{f(X_i - \theta_{0i})}{f(X_i)} \end{aligned} \quad (2-26)$$

which is of the form of $\hat{\lambda}(X)$ of (2-22). But again, θ_0 must be specified and the detector will be optimum only for a signal with that amplitude. The GLR detector can be obtained if the ML estimate $\hat{\theta}_{ML}$ of θ can be found under the constraint that $\hat{\theta}_{ML}$ be non-negative. Once again, in general this will not lead to an easily implemented and easily analyzed system.

2.3.1 Locally Optimum Detectors

The above discussion shows that we have to search further in order to obtain reasonable schemes for detection of a known signal of "reasonable" amplitude in additive non-Gaussian noise. By a "reasonable" scheme we mean a detector that is practical to implement and relatively easy to analyze for performance, which should be acceptable for the anticipated range of input signal amplitudes. Fortunately, there is one performance criterion with respect to which it is possible to derive a simple and useful canonical structure for the optimum detector for our detection problem. This is the criterion of *local* detection power, and leads to detectors which are said to be *locally optimum*.

A *locally optimum* (LO) or *locally most powerful* detector for our problem is one which maximizes the *slope* of the detector power function at the origin ($\theta = 0$), from among the class of all detectors which have its false-alarm probability. Let Δ_α be the class of all detectors of size α for H_1 versus H_0 . In our notation any detector D in Δ_α is based on a test function $q(X)$ for which

$$E(q(X) | H_1) = \alpha \quad (2.27)$$

Let $\tau_d(\theta | D)$ be the power function of detector D , that is,

$$\tau_d(\theta | D) = E(q(X) | K_1) \quad (2.28)$$

Formally, an LO detector D_{LO} of size α is a detector in Δ_α which satisfies

$$\max_{D \in \Delta_\alpha} \frac{d}{d\theta} \tau_d(\theta | D) \Big|_{\theta=0} = \frac{d}{d\theta} \tau_d(\theta | D_{LO}) \Big|_{\theta=0} \quad (2.29)$$

It would be appropriate to use a locally optimum detector when one is interested primarily in detecting *weak* signals, for which θ under the alternative hypothesis K_1 remains close to zero. The idea is that an LO detector has a larger slope for its power function at $\theta = 0$ than any other detector D of the same size which is not an LO detector, and this will ensure that the power of the LO detector will be larger than that of the other detector at least for θ in some non-null interval $[0, \theta_{max}]$ with θ_{max} depending on D . This is illustrated in Figure 2.5. Note that if an LO detector is not unique, then one may be better than another for $\theta > 0$. There is good reason to be concerned primarily with weak-signal detection. It is the weak signal that one has the most difficulty in detecting, whereas most *ad hoc* detection schemes should perform

adequately for strong signals; after all, the detection probability is upper bounded by unity.

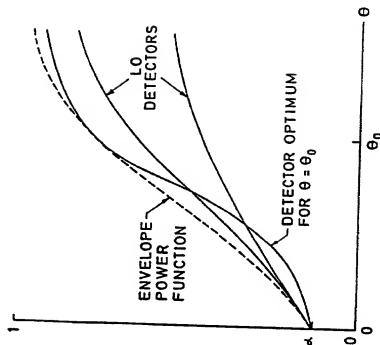


Figure 2.5 Power Functions of Optimum and LO Detectors

To obtain explicitly the canonical form of the LO detector for our problem, we can apply the generalized Neyman-Pearson lemma of Section 1.4, Chapter 1. Now the power function of a detector D based on a test function $q(X)$ is

$$\tau_d(\theta | D) = \int_{\mathcal{X}} q(x) \prod_{i=1}^n f(x_i - \theta t_i) dx \quad (2.30)$$

where the integration is over the n -dimensional Euclidean space \mathcal{X} . The regularity Assumptions A allow us to get

$$\begin{aligned}
 \frac{d}{dx} p_1(x|D) \Big|_{x=0} &= - \int_{-\infty}^{\infty} \frac{d}{dx} \frac{1}{2\theta} \sum_{i=1}^n f(x_i - \theta) \Big|_{x=0} dx \\
 &= - \int_{-\infty}^{\infty} \frac{d}{dx} \left[\sum_{i=1}^n -\theta_i \frac{f'(x_i)}{f(x_i)} \right] \frac{1}{n} f(x_i) dx \\
 &= - E \left\{ \theta(x) \left[\sum_{i=1}^n -\theta_i \frac{f'(x_i)}{f(x_i)} \right] \middle| H_1 \right\} \quad (2-31)
 \end{aligned}$$

From this it follows, from the generalized Neyman-Pearson lemma, that a locally optimum detector D_{LO} is based on the test statistic

$$\begin{aligned}
 \lambda_{LO}(X) &= - \sum_{i=1}^n \theta_i \frac{f'(X_i)}{f(X_i)} \\
 &= \sum_{i=1}^n \theta_i g_{LO}(X_i) \quad (2-32)
 \end{aligned}$$

where g_{LO} is the function defined by

$$g_{LO}(z) = - \frac{f'(z)}{f(z)} \quad (2-33)$$

Note that we may express $\lambda_{LO}(X)$ as

$$\begin{aligned}
 \lambda_{LO}(X) &= \sum_{i=1}^n \frac{d}{dx} \ln f(X_i - \theta_i) \Big|_{x=0} \\
 &= - \frac{d}{dx} \sum_{i=1}^n \ln \frac{f(X_i - \theta_i)}{f(X_i)} \Big|_{x=0} \quad (2-34)
 \end{aligned}$$

from which the LO detector test statistic (multiplied by θ) is seen to be a first-order approximation of the optimum detector test statistic given by (2-26).

The development of detection schemes for weak-signal situations can be traced back to the works of Middleton [1969] and Capon [1961]. Middleton used an expansion of the likelihood ratio in a Taylor series, from which an LO detection statistic is obtained as a weak-signal approximation. Capon considered explicitly the property of the LO detector as an optimum detector maximizing the slope of the power function for vanishing signal strength. An elaboration of Middleton's initial work is given in [Middleton, 1969]. Other early works employing the idea of a series expansion of the likelihood-ratio are those of Rudnick [1961],

Alkazi and Lerner [1964], and Antonov [1967a, 1967b]. Helstrom [1967, 1968] also briefly discusses "threshold" or LO detection.

2.3.2 Generalized Correlator Detectors

The LO detector test statistic is, of course, not dependent on θ and has an easily implemented form. Let us define a *generalized correlator* (GC) test statistic $T_{GC}(X)$ as a test statistic of the form

$$T_{GC}(X) = \sum_{i=1}^n a_i s(X_i) \quad (2-35)$$

where the a_i , $i = 1, 2, \dots, n$ are a set of constants which are correlated with the $s(X_i)$, $i = 1, 2, \dots, n$ to form $T_{GC}(X)$. The characteristic ϕ is a memoryless or instantaneous nonlinearity. Then it is clear that $\lambda_{LO}(X)$ is a GC test statistic for which ϕ is the locally optimum nonlinearity θ_i and the coefficients a_i are the known signal components θ_i . Figure 2.6 shows the structure of a GC detector, from which it is clear that its implementation is quite easy. To set the threshold for any desired false-alarm probability α , the distribution of $T_{GC}(X)$ under the null hypothesis is required. The fact that $T_{GC}(X)$ is a linear combination of the $s(X_i)$ under the null hypothesis leads to some simplification of the problem of threshold computation. In practice the null-hypothesis distribution of $T_{GC}(X)$ may be computed through numerical convolution of the density functions of the $a_i s(X_i)$. If n is large enough, the Gaussian approximation may be used for the distribution of $T_{GC}(X)$, as we will see later.




Figure 2.6 Generalized Correlator (GC) Detector

For f a zero-mean Gaussian density with variance σ^2 , we have

$$f_{LO}(z) = - \frac{z}{\sigma^2} \quad (2-36)$$

$$T_{LC}(X) = \sum_{i=1}^n a_i X_i \quad (2-37)$$

This is obtained from $\lambda(X)$ of (2-32) using (2-36), after dropping the constant a^2 . This linear correlator detector based on $T_{LC}(X)$ is known to be not just locally optimum but also UMP for $\theta > 0$ when the noise is Gaussian. Clearly the LC test statistic is a special case of a GC test statistic.

For the double-exponential noise density of (2-15) we find that $\lambda(X)$ is given by

$$f_{\lambda}(x) = a \operatorname{sgn}(x) \quad (2-38)$$

Note that the optimum detector for $\theta = \theta_0$ in this case is based on the test statistic $\lambda(X)$ of (2-19). An equivalent detector is one based on $\lambda(X)/\theta$ (since θ and a are assumed known), which coincides with $\lambda_{GC}(X)$ of (2-32) as $\theta_0 \rightarrow 0$. The LO detector for the double-exponential density is therefore a *sign correlator* (SC) detector based on the GC statistic

$$T_{SC}(X) = \sum_{i=1}^n a_i \operatorname{sgn}(x_i) \quad (2-39)$$

In the case of constant signals we may set the a_i to be unity; the result is what is called the *sign detector*, of which the SC detector is a general form. (We will study the sign and SC detectors in detail as nonparametric detectors in a sequel to this book.) Their property of being *robust* detectors is also well known.

The LO and the SC detectors (and their special cases for $a_i = 1$, all i , the *linear* and *sign* detectors, respectively) are the best-known of the LO detectors for known signals in additive i.i.d. noise. We will, in fact, encounter other versions of these detectors in Chapters 5, 6, and 7. The LC detector is optimum for the important special case of Gaussian noise, and therefore is used as a standard against which other detectors are compared for performance under Gaussian noise. The SC detector is a particularly simple example of a detector which is optimum for a non-Gaussian noise density, which does happen to be a useful simple model of non-Gaussian noise in several applications. Its very simple structure together with its nonparametric and robust performance characteristics make it, too, a commonly used standard against which other detectors are compared for performance and

2.2.3 Asymptotic Optimality

For our detection problem formalized as that of testing H_1 versus H_0 , a locally optimum detector D_{LO} of size α has a power function $p_L(\theta | D_{LO})$ for which the function $p_L'(\theta | D_{LO})$ at $\theta = 0$ is a maximum from among all detectors D of size α . In the non-Gaussian situation an LO detector will generally not be a UMP detector. For some particular value $\theta_0 > 0$ for θ we can find the optimum (Neyman-Pearson) detector D_{NP} of size α ; let its power function be explicitly written as $p_L(\theta | \theta_0, D_{NP})$. Then in general we will have

$$p_L(\theta_0 | D_{LO}) < p_L(\theta_0 | \theta_0, D_{NP}) \quad (2-40)$$

for $0 < \alpha < 1$, and this will be true for θ_0 arbitrarily small.

Let us call the function of θ_0 on the right-hand side of (2-40) the *envelope power function*, which is therefore the function $p_L(\theta | E)$ defined by

$$p_L(\theta | E) = p_L(\theta | \theta_0, D_{NP}) \quad (2-41)$$

Clearly, we will find that $\lim_{\theta \rightarrow 0} p_L(\theta | E) = \alpha$. Since we have assumed the non-existence of a UMP detector, no single detector exists which has the power function $p_L(\theta | E)$. Rather, the envelope power function now becomes the standard against which the performances of other detectors may be compared. The relationship between these power functions is illustrated in Figure 2.5.

In using an LO detector we can be assured only that $p_L'(\theta | D)$ is maximized. In justifying the use of an LO detector we have mentioned that the case of weak signals implied by the condition $\theta \rightarrow 0$ is an important case in practical applications. On the other hand note that for any fixed sample size n , the power or detection probability approaches the value α (the false-alarm probability) for $\theta \rightarrow 0$. Thus while the condition $\theta \rightarrow 0$ is of considerable interest, it is generally used in conjunction with an assumption that $n \rightarrow \infty$. The practical significance is that in detection of a weak signal one necessarily uses a relatively large sample size to get a reasonable value for the probability of correct detection. We see that with local optimality we addressed only one part (the "local signal" case) of this combined asymptotic situation. We will now consider the combined asymptotic assumption $\theta \rightarrow 0$ and $n \rightarrow \infty$, and show that in general the LO detector has an optimality property for this asymptotic case.

The problem can be formally stated as a sequence of hypothesis-testing problems, $\{H_{1,n} \text{ versus } K_{1,n}, n = 1, 2, \dots\}$ where $H_{1,n}$ is simply an explication of the fact that H_1 of (2-13) is applicable for the case of n independent observations from the noise density. The sequence of alternatives $\{K_{1,n}, n = 1, 2, \dots\}$ is described by

$$K_{1,n}: X(n) = \prod_{i=1}^n f(x_i - \theta, \theta), \quad n = 1, 2, \dots, \quad (2-42)$$

$$\theta_0 > 0, \theta_n \rightarrow 0 \quad (2-43)$$

We shall be interested in particular types of sequences $\{\theta_n\}$ converging to zero. For example, we could have $\theta_n = 1/\sqrt{n}$ for some fixed $\gamma > 0$, so that $n\theta_n^2$ remains fixed at γ^2 as $n \rightarrow \infty$. In the constant signal case ($\theta_n = 1, \text{ all } n$) this models a sequence of detection problems with increasing sample sizes and decreasing signal amplitudes in such a way that the total signal energy $\theta_n^2 \sum_{i=1}^n n\theta_n^2$ remains fixed. In the time-varying signal case, the condition that $\frac{1}{n} \sum_{i=1}^n n\theta_n^2$ converges (without loss of generality, to unity) as $n \rightarrow \infty$ allows a similar interpretation to be made in the asymptotic case. Let us, in fact, henceforth make such an assumption about our known signal sequences $\{\theta_i, i = 1, 2, \dots\}$, and also require it to be uniformly bounded for mathematical convenience. These may be stated as *Assumptions C*:

- C. (i) There exists a finite, non-zero bound U_i such that
- $$0 \leq |\theta_i| \leq U_i, \quad i = 1, 2, \dots \quad (2-43)$$
- (ii) The asymptotic average signal power is finite and non-zero,
- $$0 < \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=1}^n n\theta_i^2 = P_s^2 < \infty \quad (2-44)$$

We should note one more technical detail. In defining the $K_{1,n}$ by (2-42) there is the implication that as n increases the known-signal vector $\theta = (\theta_1, \theta_2, \dots, \theta_n)$ grows by having additional components appended to it, without change in the existing components. This appropriately models a situation where the observations X_i are obtained as samples taken at a fixed sampling rate from some continuous-time waveform, with the observation time increasing to generate the sequence of hypothesis-testing problems. On the other hand, one may have a situation where the observation interval is fixed, with the sampling rate increasing to generate the sequence of hypothesis-testing problems. Such cases

are handled by replacing the θ_i in (2-42) with $\theta_{i,n}$, thus explicitly allowing the set of n signal components under $K_{1,n}$ to depend more generally on n .

The idea in considering formally a sequence of hypothesis-testing problems $\{H_{1,n} \text{ versus } K_{1,n}, n = 1, 2, \dots\}$ is the following: if we can find a corresponding sequence $\{D_n, n = 1, 2, \dots\}$ of detectors which in the limit $n \rightarrow \infty$ have some optimality property, then for sufficiently large finite n the use of D_n will give approximately optimum performance.

Since we are considering a sequence of hypothesis-testing problems indexed by n , we will now modify our notation slightly and use, for instance, $p_d(\theta_n | D_n)$ for the power function of a size- α detector D_n based on n observations X_1, X_2, \dots, X_n for $H_{1,n}$ versus $K_{1,n}$. What we would like to do is consider sequences $\{D_n\}_{n=1}^{\infty}$ converging to zero in such a way that the envelope power function values $p_d(\theta_n | D_n)$ converge to values which lie strictly between α and 1 (for size- α detectors). Then we would be looking at a sequence of detection problems in which the sample size is growing and signal amplitude is shrinking in such a way as to allow the optimum detector performance (detection probability larger than α) but without allowing asymptotically "perfect" detection (detection probability less than unity).

Definition: We will say that a sequence of detectors $\{D_{AO,n}, n = 1, 2, \dots\}$ is asymptotically optimum (AO) at level α for $\{H_{1,n} \text{ versus } K_{1,n}, n = 1, 2, \dots\}$ if

$$(i) \quad \lim_{n \rightarrow \infty} E\{\delta_{AO,n}(X) | H_{1,n}\} = \lim_{n \rightarrow \infty} p_d(0 | D_{AO,n}) \leq \alpha \quad (2-45)$$

and

$$(ii) \quad \lim_{n \rightarrow \infty} [p_d(\theta_n | D_n) - p_d(\theta_n | D_{AO,n})] = 0 \quad (2-46)$$

Here $\delta_{AO,n}(X)$ is the test function for the detector $D_{AO,n}$.

Condition (i) above will obviously be satisfied if each detector $D_{AO,n}$ in the sequence is a size- α detector. According to condition (ii), an AO sequence of detectors has a sequence of power values for the alternatives $K_{1,n}$ defined by the θ_n which is in the limit $n \rightarrow \infty$ equal to the power of the optimum detector. If

¹ (i) May be made more general by replacing " $\lim_{n \rightarrow \infty}$ " by " $\limsup_{n \rightarrow \infty}$ "; this would not necessarily require $p_d(0 | D_{AO,n})$ to converge as $n \rightarrow \infty$.

$\delta_n, n = 1, 2, \dots$, defines a sequence of alternatives for which the sequence of optimum size- α detectors is consistent, then $\lim_{n \rightarrow \infty} P_0(\delta_n | E_n) = 1$. In this case any other sequence of detectors which is simply consistent (and has asymptotic size α) will be an AO sequence. Thus it will be of most interest to consider cases for which $\alpha < \lim_{n \rightarrow \infty} P_0(\delta_n | E_n) < 1$.

Note carefully that the property of being AO belongs to a sequence of detectors. Usually, however, we consider sequences of detectors employing exactly the same rule for computing the test statistic for each n ; for example, we might consider a sequence of SC detectors with test statistics defined by (2-39) for each n . In such cases we often say that a particular detector is AO, when we really mean that the sequence of such detectors is AO. The property of being locally optimum, on the other hand, belongs to an individual detector (operating on some sample of fixed size n).

2.3.4 Asymptotic Optimality of LO Detectors

Let us consider the sequence $\{D_{20}, n = 1, 2, \dots\}$ of LO detectors of size α for our sequence of hypothesis-testing problems. Then we can show that this is an AO sequence of detectors for the alternatives $K_{1,n}$ defined by $\delta_n = \gamma/\sqrt{n}$, $n = 1, 2, \dots$, for any fixed $\gamma > 0$. This optimality property of the sequence of LO detectors gives them a stronger justification for use when sample sizes are large. To prove the asymptotic optimality of any sequence of detectors $\{D_n\}$ we have to be able to obtain the limiting values of the powers $P_1(\delta_n | D_n)$ and $P_0(\delta_n | E_n)$ and these can be obtained if the asymptotic distributions of the test statistics are known. For the envelope power function $P_1(\delta_n | E_n)$ we have to consider the optimum detectors based on the log-likelihood functions $\lambda(X)$ of (2-26), and obtain their asymptotic distributions for $\delta_n = \gamma/\sqrt{n}$ and $n \rightarrow \infty$. Let us now carry out this asymptotic analysis in a heuristic way, with any regularity conditions required to make our analysis rigorously valid implicitly assumed to hold.

The log-likelihood function $\lambda(X)$ of (2-26) with $\delta_n = \gamma/\sqrt{n}$ may be expanded in the Taylor series

$$\begin{aligned} \lambda(X) &= \sum_{i=1}^n \ln \frac{f(X_i)}{f(X_i)} + \frac{\gamma}{\sqrt{n}} \sum_{i=1}^n \left\{ \frac{f'(X_i)}{f(X_i)} \right\} \\ &\quad + \frac{1}{2} \frac{\gamma^2}{n} \sum_{i=1}^n \left\{ \frac{f''(X_i)}{f(X_i)} \right\} + o(1) \\ &\approx \frac{\gamma}{\sqrt{n}} \lambda_{10}(X) \end{aligned}$$

$$+ \frac{1}{2} \frac{\gamma^2}{n} \sum_{i=1}^n \left\{ \frac{f''(X_i)}{f(X_i)} - \left[\frac{f'(X_i)}{f(X_i)} \right]^2 \right\} \quad (2-47)$$

for large n . Note that a quantity Z_n is said to be of order $o(1/\delta_n)$ if $\delta_n Z_n \rightarrow 0$ (in probability). Thus the only essential way in which the above approximation differs from the LO test statistic $\lambda_{10}(X)$ of (2-32) is in the second term above. But this term converges in probability,

$$\begin{aligned} \lim_{n \rightarrow \infty} \frac{\gamma^2}{2n} \sum_{i=1}^n \left\{ \frac{f''(X_i)}{f(X_i)} - \left[\frac{f'(X_i)}{f(X_i)} \right]^2 \right\} \\ = \frac{1}{2} \gamma^2 E \left\{ \frac{f''(X)}{f(X)} - \left[\frac{f'(X)}{f(X)} \right]^2 \right\} \\ = -\frac{1}{2} \gamma^2 P_2(f) \quad (2-48) \end{aligned}$$

under both $H_{1,n}$ and $K_{1,n}$. We have assumed that $\int f''(x) dx$ is zero. Note that P_2 is the average known-signal power and $f(f)$ is Fisher's information for location shift of (2-12). The first term $(\gamma/\sqrt{n}) \lambda_{10}(X)$ is asymptotically Gaussian under $H_{1,n}$ with mean value 0 and variance $\gamma^2 P_1(f)$. To find the asymptotic mean and variance of $(\gamma/\sqrt{n}) \lambda_{10}(X)$ under $K_{1,n}$, we expand it as

$$\begin{aligned} \frac{\gamma}{\sqrt{n}} \lambda_{10}(X) &= \frac{\gamma}{\sqrt{n}} \sum_{i=1}^n \left\{ \frac{f'(W_i)}{f(W_i)} + \frac{f'(W_i)}{\gamma/\sqrt{n}} \frac{1}{f(W_i)} \right\} \\ &= \frac{\gamma}{\sqrt{n}} \sum_{i=1}^n \left\{ \frac{f'(W_i)}{f(W_i)} \right\} \\ &\quad + \frac{\gamma^2}{n} \sum_{i=1}^n \left\{ \frac{f''(W_i)}{f(W_i)} + \left[\frac{f'(W_i)}{f(W_i)} \right]^2 \right\} \\ &\quad + o(1) \quad (2-49) \end{aligned}$$

We conclude that the asymptotic mean of $(\gamma/\sqrt{n}) \lambda_{10}(X)$ is $\gamma^2 P_2(f)$ and its asymptotic variance is also $\gamma^2 P_1(f)$ under $K_{1,n}$. Furthermore, $(\gamma/\sqrt{n}) \lambda_{10}(X)$ is also asymptotically normally distributed under the sequence of alternatives $K_{1,n}$.

To summarize, then, we have that the sequence of optimum detection test statistics converges in distribution to a test statistic with a Gaussian distribution with mean $-\frac{1}{2} \gamma^2 P_2(f)$ and vari-

ance $\gamma^2 P^2 \gamma(U)$ under the null hypotheses, and to a test statistic with a Gaussian distribution with mean $\frac{1}{2} \gamma^2 P^2 \gamma(U)$ and variance $\gamma^2 P^2 \gamma(U)$ under the alternative hypothesis. The sequence of LO test statistics $(t_n/\sqrt{n}) \lambda_{LO}(x)$ is similarly asymptotically Gaussian, with mean zero and variance $\gamma^2 P^2 \gamma(U)$ under the null hypothesis and with mean and variance both equal to $\gamma^2 P^2 \gamma(U)$ under the alternative hypothesis. From this we conclude that for the optimum detectors we get, with ϕ the standard Gaussian distribution function,

$$\begin{aligned} \lim_{n \rightarrow \infty} P_1 \left\{ \frac{\gamma}{\sqrt{n}} | E_n \right\} &= \lim_{n \rightarrow \infty} P(\lambda(X) > t_n | K_{1,n}) \\ &= 1 - \phi \left[\frac{t_n - \frac{1}{2} \gamma^2 P^2 \gamma(U)}{\gamma^2 P^2 \gamma(U)} \right] \end{aligned} \quad (2-50)$$

where the thresholds t_n for size- α optimum detectors converge to t_α given by

$$\alpha = 1 - \phi \left[\frac{t_\alpha + \frac{1}{2} \gamma^2 P^2 \gamma(U)}{\gamma^2 P^2 \gamma(U)} \right] \quad (2-51)$$

This gives

$$\lim_{n \rightarrow \infty} P_1 \left\{ \frac{\gamma}{\sqrt{n}} | E_n \right\} = 1 - \phi \left\{ \phi^{-1}(1 - \alpha) - \gamma^2 P^2 \gamma(U) \right\} \quad (2-52)$$

Similarly, the sequence of LO detectors $D_{LO,n}$ using $(t_n/\sqrt{n}) \lambda_{LO}(x)$ as test statistics and a fixed threshold $t_\alpha + \frac{1}{2} \gamma^2 P^2 \gamma(U)$ have asymptotic size α and asymptotic power

$$\begin{aligned} \lim_{n \rightarrow \infty} P_1 \left\{ \frac{\gamma}{\sqrt{n}} | D_{LO,n} \right\} &= \lim_{n \rightarrow \infty} P \left\{ \frac{\gamma}{\sqrt{n}} \lambda_{LO}(X) > t_\alpha + \frac{1}{2} \gamma^2 P^2 \gamma(U) | K_{1,n} \right\} \\ &= 1 - \phi \left[\frac{t_\alpha - \frac{1}{2} \gamma^2 P^2 \gamma(U)}{\gamma^2 P^2 \gamma(U)} \right] \\ &= \lim_{n \rightarrow \infty} P_1 \left\{ \frac{\gamma}{\sqrt{n}} | E_n \right\} \end{aligned} \quad (2-53)$$

This makes the sequence $\{D_{LO,n}, n = 1, 2, \dots\}$ an AO sequence of

detectors for $\theta_n = \gamma/\sqrt{n}$ under $K_{1,n}$.

The above development does not constitute a rigorous proof of the fact that the sequence of LO detectors are AO for the alternatives $\theta_n = \gamma/\sqrt{n}$. A rigorous proof along the above lines would require additional specific regularity conditions to be imposed on the noise density functions f . Actually, it is possible to establish quite rigorously the required asymptotic normality results above without assuming regularity conditions beyond those of assumptions A, B, and C. It would not be appropriate to enter into the details of such a proof here, involving as it does some lengthy mathematical details. We shall observe here only that such a proof makes use of some very useful results known as LeCam's lemmas, which are given detailed exposure by Hajek and Sidak [1967, Ch. VI].

The sequence of LO detectors is not the only sequence of detectors which is AO for $\theta_n = \gamma/\sqrt{n}$. The sequence of optimum detectors is an obvious example of another AO sequence of detectors. Loosely speaking, any sequence of detectors with the correct asymptotic size and with test statistics which converge to LO test statistics as $n \rightarrow \infty$ will be an AO sequence of detectors. For example, consider the sequence of test statistics

$$T(X) = \sum_{i=1}^n \epsilon_i \theta_n(X_i), \quad n = 1, 2, \dots \quad (2-54)$$

where

$$\epsilon_n(x) = \begin{cases} 1, & x > \frac{1}{n} \\ 0, & -\frac{1}{n} \leq x \leq \frac{1}{n} \\ -1, & x < -\frac{1}{n} \end{cases} \quad (2-55)$$

Then it can be shown easily that the sequence of size- α detectors based on this sequence of test statistics is AO for $\theta_n = \gamma/\sqrt{n}$ and for the double-exponential noise density. The LO detector for any specific value of the sample size may not be very convenient to implement. If we use instead a simpler detector for each n , defined in such a way that this sequence of detectors is asymptotically optimum, then for large n and small θ we will get performance very close to that of the LO detector.

We have given a careful and somewhat lengthy discussion of AO detectors in this section for several reasons. First, there has been some confusion in earlier work with regard to the asymptotic optimality properties of LO detectors. Second, we will find that this careful discussion will help us to better understand the

asymptotic relative efficiency (ARE) as a relative performance measure for two (sequences of) detectors. Finally, having given this development of asymptotic optimality specified for the known signal detection problem, we will feel justified in omitting its treatment for other types of detection problems. It is possible to obtain AO detectors for many other types of detection problems, including those formulated for continuous-time observations.

We have already referred to the book by Hajek and Sidiak [1967] as an excellent, though somewhat advanced treatment of this topic. In signal detection applications the asymptotic optimality criterion has been discussed by Levin and Kushner [1969] by Levin and Rybin [1969] by Levin, Kushner, and Pinsky [1971], and by Kutoyants [1975, 1976], among others. One topic we have omitted is that of AO detection in correlated noise, which would have taken us too far outside the intended scope of this book. The interested reader is referred to the works of Pinsky [1971], Poor [1962], Poor and Thomas [1979, 1980], and Halverson and Wise [1980a, 1980b] as examples of such investigations.

2.4 Detector Performance Comparisons

We have noted that the linear correlator detector based on the test statistic $T_{GC}(X)$ of (2-37) is a UMP detector for the known-signal detection problem when the noise is Gaussian. When the noise is not Gaussian, however, the LC detector is a generalized correlator detector using test statistic $\lambda_{AO}(X)$ of (2-32), a special of $T_{GC}(X)$ of (2-35). Since the use of detectors which are optimum under Gaussian conditions is widespread, we will be particularly interested now in comparing the performance of the LC detector with other GC detectors for different noise density functions f , for testing H_1 versus H_0 . For example, it would be useful to know how well the LC detector performs relative to the sign correlator (SC) detector when the noise has the double-exponential density function, and also how much better it is than the SC detector when the noise is, indeed, Gaussian.

In comparing the performances of two detectors D_1 and D_2 in testing H_1 versus H_0 , the relevant quantities which have to be considered are the sample size n , the signal amplitude θ , the false-alarm probability P_f , the noise density function f , and the detection probabilities P_d (D_1) and $P_d(\theta|D_2)$. For a given density function f , for example, one can look at different combinations of n and θ and obtain for each the relationship between P_f and the detection probability P_d , the receiver operating characteristics (ROC) for each detector. Alternatively, one may obtain for each detector the power functions $P_d(\theta|D)$ for fixed f and different combinations of the sample size n and false-alarm probability $P_f = \alpha$.

It can be appreciated that this can become a rather formidable task even for simple GC detectors. Consider, for example, the LC detector when the noise density function is not Gaussian. To obtain its power function for a given n and θ , one has generally to resort to a numerical technique to find the distribution of the LC test statistic for the given n . The comparison is even more difficult for the GC test statistics using nonlinear functions ϕ .

Even if it were easy to generate power functions or ROCs for the detectors being compared, there would be entire families of such performance functions, parameterized by n and θ or n and θ , respectively, for each detector for any noise density function f . What would be very useful would be to have a real-valued relative performance index which can be derived as a function of f , summarizing some particularly relevant aspect of the exhaustive performance comparison. These considerations lead us to the introduction of the asymptotic relative efficiency (ARE) of two detectors as a measure of their relative performance.

2.4.1 Asymptotic Relative Efficiency and Efficacy

In Section 1.6 of Chapter 1 we gave the technical details about the ARE as a measure of the relative performance of two detectors. We now explain it and illustrate its use specifically for the known-signal detectors. The most important thing to note about the ARE is that it measures the relative performance of two detectors in the asymptotic case $n \rightarrow \infty$ for a sequence of hypothesis-testing problems. In the specific context of known-signal detection we consider the sequences $\{f_{1,n}\}$ versus $\{K_{1,n}\}$, $n = 1, 2, \dots$. We have $\theta_n \rightarrow 0$ as $n \rightarrow \infty$, and θ_n is chosen in a manner which makes the test statistics of both detectors, have well-defined asymptotic distributions (of the same type) as $n \rightarrow \infty$. If under H_0 , the two sequences of test statistics also have well-defined asymptotic distributions of a common type, the parameters of these asymptotic distributions may be used to characterize the asymptotic relative performances of the two detectors. Under the specific assumptions stated in Section 1.6 (asymptotic distributions are Gaussian, each detector has test statistics which have the same asymptotic variance under both H_0 and H_1 , and the ARE as an index of relative performance). The ARE has a numerical value which can be obtained for given f .

Let us now get down to specifics for GC detectors. Consider in general the use of a GC detector using coefficients ϵ_i , as described by the test statistic $T_{GC}(X)$ of (2-35). Since we will be considering a sequence of such GC detectors based on some fixed f , in the limiting case there will be an infinite number of

coefficients a_i defining $T_{OC}(X)$. We make the following regularity Assumptions D:

D. (i) There exists a finite non-zero bound U_a such that

$$0 \leq |a_i| \leq U_a, \quad i = 1, 2, \dots \quad (2-56)$$

(ii) The asymptotic average coefficient power is finite and non-zero,

$$0 < \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=1}^n a_i^2 = P_a^2 < \infty \quad (2-57)$$

(iii) $g(X)$ has zero mean and finite variance under f ,

$$\int_{-\infty}^{\infty} f(g(x)/z) dz = 0 \quad (2-58)$$

and

$$\int_{-\infty}^{\infty} g^2(x)/z dz < \infty \quad (2-59)$$

Assumptions D (i) and (ii) are similar to Assumptions C (i) and (ii) of Section 2.3 for the known signal sequence, and are quite reasonable conditions to impose on the coefficients. Under D (iii) we have that $E(g(X)|H_1) = 0$, which is not restrictive since any arbitrary g can always be normalized to satisfy this condition, by subtracting from it its mean value under H_1 . Finally, the finite variance assumption is also quite reasonable. Notice that the LO nonlinearity f_{LO} for given f does satisfy condition D (iii), for f satisfying Assumptions A and B of Section 2.2.

Now consider the sequence of hypothesis-testing problems $(H_{1,n}$ versus $K_{1,n}$, $n = 1, 2, \dots$) with $P_a = 1/\sqrt{n}$ for some fixed $T > 0$, and the sequence of GC detectors $(D_{GC,n}$, $n = 1, 2, \dots$) based on test statistics $T_{OC}(X)$ given by (2-35) and satisfying assumptions D. Under the null hypotheses $H_{1,n}$ it is easy to see that $(1/\sqrt{n}) T_{OC}(X)$ has mean zero and asymptotic variance

$$\lim_{n \rightarrow \infty} V \left\{ \frac{1}{\sqrt{n}} T_{OC}(X) | H_{1,n} \right\} = -\mathcal{P}^2 \int_{-\infty}^{\infty} g^2(x)/z dz \quad (2-60)$$

Furthermore, it follows from a central limit theorem that $(1/\sqrt{n}) T_{OC}(X)$ is asymptotically Gaussian under $H_{1,n}$.

To obtain the characteristics under $K_{1,n}$, let us use the expansion

$$\begin{aligned} \frac{1}{\sqrt{n}} T_{OC}(X) &= \frac{1}{\sqrt{n}} \sum_{i=1}^n a_i g \left(W_i + \frac{1}{\sqrt{n}} a_i \right) \\ &= \frac{1}{\sqrt{n}} \sum_{i=1}^n a_i g(W_i) + \frac{1}{n} \sum_{i=1}^n a_i a_i g'(W_i) \\ &\quad + o(1) \end{aligned} \quad (2-61)$$

[cf. expansion (2-49)], assuming for the time being the additional regularity conditions required to make this valid. We find from this that

$$\begin{aligned} \lim_{n \rightarrow \infty} E \left\{ \frac{1}{\sqrt{n}} T_{OC}(X) | K_{1,n} \right\} &= -\mathcal{P}^2 \int_{-\infty}^{\infty} g'(z)/z dz \\ &= -\mathcal{P}^2 \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} g(z)/z' dz \quad (2-62) \end{aligned}$$

$$\lim_{n \rightarrow \infty} V \left\{ \frac{1}{\sqrt{n}} T_{OC}(X) | K_{1,n} \right\} = -\mathcal{P}^2 \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} g^2(z)/z dz \quad (2-63)$$

and that $(1/\sqrt{n}) T_{OC}(X)$ is also asymptotically Gaussian under $K_{1,n}$. Here the quantity \mathcal{P}_a is

$$\mathcal{P}_a = \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=1}^n a_i^2 \quad (2-64)$$

This heuristic proof that $(1/\sqrt{n}) T_{OC}(X)$ is asymptotically Gaussian with mean $-\mathcal{P}_a^2 \int_{-\infty}^{\infty} g'(z)/z dz$ and variance $-\mathcal{P}_a^2 \int_{-\infty}^{\infty} g^2(z)/z dz$ follows a line of reasoning similar to one that we employed for the LO detectors earlier. Note that for $g = f_{LO}$ and $a_i = a_i$, these results reduce to those obtained for the LO detectors. Furthermore, it is also true that the asymptotic normality under $K_{1,n}$ with the mean and variance we have given above can be established without using any regularity assumptions other than Assumptions A, B, C, and D. Such a proof depends on use of LeCam's lemmas, which as we have indicated earlier, are discussed in Hajek and Sidak [1967, Ch. VI].

Proceeding as we have done before for the LO detectors, we find that for the sequence of GC detectors with asymptotic size α

$$\lim_{\alpha \rightarrow \infty} P_d \left(\frac{\gamma}{\gamma_n} | D_{oc, \alpha} \right) = 1 - \Phi \left[\Phi^{-1}(1 - \alpha) - \gamma \frac{P_s}{P_n} E(g, f) \right] \quad (2-65)$$

where

$$E(g, f) = \frac{\int_{-\infty}^{\infty} g(z) f'(z) dz}{\int_{-\infty}^{\infty} g^2(z) f(z) dz} \quad (2-66)$$

The function $1 - \Phi[\Phi^{-1}(1 - \alpha) - \epsilon]$ is an increasing function of ϵ with value α at $\epsilon = 0$. Thus for $\gamma > 0$ the limiting detection power will be no less than α if $P_s E(g, f)$ is non-negative, making the GC detectors asymptotically unbiased. This quite reasonable requirement will always be assumed to hold; the sign of g or of the coefficient sequence can always be picked to meet this requirement. Comparing the limiting power given by (2-52) for the AO detectors and the result (2-65) for the GC detectors, we see that an index of their asymptotic relative performance is provided by the following ratio, which we will call the *asymptotic relative gain* (ARG):

$$ARG_{GC, AO} = \frac{P_s E(g, f)}{P_s P_n \sqrt{f(f)}} = \rho_{ss} \frac{E(g, f)}{\sqrt{f(f)}} \quad (2-67)$$

Here ρ_{ss} is the correlation coefficient

$$\rho_{ss} = \frac{P_s}{P_s P_n} \quad (2-68)$$

The coefficient ρ_{ss} attains its maximum value of unity if $s_i = k s_i$, all i , for any $k > 0$. We also find that

$$\frac{E(g, f)}{\sqrt{f(f)}} = \frac{\int_{-\infty}^{\infty} g(z) f_{oc}(z) f(z) dz}{\int_{-\infty}^{\infty} g^2(z) f(z) dz \int_{-\infty}^{\infty} f_{oc}^2(z) f(z) dz}^{1/2} \quad (2-69)$$

with equality being achieved when $g = f_{oc}$.

Let us view the right-hand sides of (2-52) and (2-65) as approximations for the actual detection probabilities for the AO and GC detectors, respectively, for large sample sizes. Then we may write

$$P_d(g | D_{oc, \alpha}) \approx 1 - \Phi[\Phi^{-1}(1 - \alpha) - \delta \sqrt{n} P_s \rho_{ss} E(g, f)] \quad (2-70)$$

and

$$P_d(g | D_{oc, \alpha}) \approx 1 - \Phi[\Phi^{-1}(1 - \alpha) - \delta \sqrt{n} P_s \sqrt{f(f)}] \quad (2-71)$$

For fixed n (and P_s , since the signal is known) we see that the $ARG_{GC, AO}$ measures the relative signal amplitudes required for the performances of the two detectors to be identical. Specifically, $ARG_{GC, AO}$ is the ratio of the amplitude of the signal required by the AO detector relative to that required by the GC detector for their detection probabilities to be the same at any common value α of the false-alarm probability, in the asymptotic case of large n .

On the other hand, if we fix g at some small value, then it follows immediately that the square of $ARG_{GC, AO}$ is the $ARG_{GC, AO}$, the ratio of sample sizes required by the two detectors for identical asymptotic performance. Thus we have

$$ARG_{GC, AO}^2 = \frac{[ARG_{GC, AO}]^2}{\frac{(P_s^2/P_n) E^2(g, f)}{P_s^2 f(f)}} \quad (2-72)$$

The numerator in (2-72) may be identified as the efficacy ξ_{GC} of the GC detector,

$$\xi_{GC} = \rho_{ss}^2 P_s^2 E^2(g, f) \quad (2-73)$$

which reduces to $P_2(f)$ for the AO detector using $a_1 = a_2$ and $g = a_0$. Since the signal sequence is known we will henceforth assume that $a_1 = a_2$, so that we get $\rho_{aa} = 1$ and

$$ARE_{GC, AO} = \frac{E^2(g, f)}{I(f)} \quad (2-74)$$

$$= \frac{\xi_{GC}}{I(f)}$$

In general ξ_{GC} is the normalized efficacy

$$\xi_{GC} = \frac{\xi_{GC}}{P_2} \quad (2-75)$$

$$= \rho_{aa}^2 E(g, f)$$

We may extend this result quite easily to obtain the ARE of two GC detectors, D_{GC1} and D_{GC2} , based on nonlinearities g_1 and g_2 and the same coefficients $a_1 = a_2$, as

$$ARE_{GC, GC2} = \frac{\xi_{GC1}}{\xi_{GC2}} \quad (2-76)$$

where

$$\xi_{GC1} = \frac{\int_{-\infty}^{\infty} g_1(z) g_2'(z) dz}{\int_{-\infty}^{\infty} g_1^2(z) dz} \quad (2-77)$$

Notice that the above result for the normalized efficacy of any GC detector could have been derived formally by applying the Pitman-Neyman result of (1-41).

In our development above we considered sequences of GC detectors obtained with fixed characteristics g for different sample sizes n . More generally, we can consider sequences of GC detectors with characteristics $g(z, n)$ which are a function of n . One such case is that of (2-55). The quantity $E(g, f)$ is again the asymptotic ratio of the mean to the standard deviation of the GC test statistic under $K_{1, \infty}$ when $n \rightarrow \infty$ (assuming asymptotic normality). Stated loosely, if $g(z, n)$ converges to some fixed $g(z)$, then $E(g, f)$ becomes $E(g, f)$. What we really need is convergence of the mean and variance of $g(X_1, n)$ as required under the

conditions for Theorem 3 in Section 1.6.

Our results indicate that if our sequence of GC detectors is an AO sequence, then the $ARE_{GC, AO} = 1$. Conversely, if $ARE_{GC, AO} \neq 1$ and $\xi_{GC} = I(f)$, we find that the sequence of GC detectors is an AO sequence. One conclusion we have drawn from (2-70) and (2-73) is that the efficacy of a detector indicates the absolute power level obtainable from it in the asymptotic case. Modifying (2-70) slightly, we get, with σ^2 the noise variance,

$$P_2(g | D_{GC, n}) \approx 1 - \Phi \left[\Phi^{-1}(1 - \alpha) - \frac{\theta}{\sigma} \sqrt{n} P_2 \rho_{aa} E(g, f) \right] \quad (2-78)$$

from which we deduce that it is really the quantity $\sigma^2 \xi_{GC}$ which gives an indication of the large sample-size powers of the detector for any given value of signal-to-noise ratio (SNR) θ/σ . For the LO and AO detectors we have that $\sigma^2 \xi_{GC} = P_2^2 \sigma^2 I(f)$, thus it is of interest to find the worst-case density minimizing $\sigma^2 I(f)$. It can be shown (Problem 2.4) that the density function minimizing $\sigma^2 I(f)$ is just the Gaussian density function. Thus we may conclude that with optimal processing it is always possible to obtain better performance for non-Gaussian noise than with Gaussian noise under the same SNR conditions. In some cases the potential improvements in performance are quite large.

As an example of the application of these results, consider the LG detector for which $g(z) = z$. From (2-77) we find that the normalized efficacy of the LG detector is $\xi_{GC} = 1/\sigma^2$ where σ^2 is the noise variance. For the sign correlator detector for which $g(z) = \text{sgn}(z)$, we have the normalized efficacy

$$\xi_{GC} = \frac{\int_{-\infty}^{\infty} \text{sgn}(z) g'(z) dz}{\int_{-\infty}^{\infty} g^2(z) dz} \quad (2-79)$$

$$= 4/\pi \quad (2-80)$$

Thus we have

$$ARE_{GC, LG} = 4\sigma^2 I(0)$$

This has a value of 0.04 for Gaussian noise and a value of 2.0 for noise with the double-exponential pdf.

In concluding this discussion of asymptotic performance, let us observe that the efficacy may be interpreted as an output SNR of a detector. Defining the output SNR of a GC detector as

$$SNR_G = \frac{E\{T_{GC}(X)\} K_1 - E\{T_{GC}(X)\} K_1\}^2}{V\{T_{GC}(X)\} K_1} \quad (2-81)$$

let us consider the case where θ is small. Then it is easily seen that SNR is approximately $n P_s^2 P_n^2 E^2(f, f)$, where P_n and P_s are the finite versions of the limiting values p_n and p_s . The quantity $E^2(f, f)$ is called the differential SNR or $DSNR$, and is essentially the same as the efficacy. A general discussion of second-order measures such as these may be found in [Gardner, 1980].

2.4.2 Finite-Sample-Size Performance

Suppose we wish to compare the exact performances of two detectors operating in noise with a given probability density function. Then, as we have noted at the beginning of this section, we need in general to consider all combinations of sample size n , signal-to-noise ratio (or signal amplitude θ), and false-alarm probability P_f , and compute the associated detection probabilities. The detection probabilities can, in principle, always be computed using numerical techniques; in practice this may be costly and tedious. Even after all these computations have been made, no single index of relative performance can be given, although specific aspects of the relative performance (e.g., relative amplitudes at given n and P_f , and $P_f = 0.9$) may be so characterized. Of course, the entire procedure has to be repeated for a different noise density function.

While the speed and power of modern computing facilities may make such exhaustive comparisons quite feasible, this type of comparison does not yield simple closed-form expressions for indices of relative performance. The availability of such an index is of prime importance as a basis for initial design of a good detection scheme. For example, we will see in Chapter 4 how the efficacy can be used as a basis for optimum quantizer design. The efficacy and the ARE are asymptotic absolute performance and relative performance measures, respectively, which are very convenient to use. What is therefore very important to know is the extent to which the ARE of two detectors is a good indicator of their performances under finite-sample-size and non-zero-signal-strength conditions.

The answer to this will obviously depend on the particulars of the two detectors, that is, on their characteristic nonlinearities f ; on the noise density function f ; and on the combination of sample size n , signal amplitude θ , and false-alarm and detection probabilities P_f and P_d . Note that in using the efficacy and the ARE we make two key assumptions about our detection problem. One is that the sample size n is large enough so that the test statistic of a GO detector may be assumed to have its asymptotic Gaussian distribution. The other is that the signal amplitude θ is small enough to allow us to use the first-order approximations leading to (2-92). What we would like to have, then, are results

which allow us to make some general conclusions about the validity of these assumptions in finite-sample-size performance comparisons under various conditions.

Within the class of GO detectors the linear correlator detector is widely used as the optimum detector for Gaussian noise. The second most popular detector in this class is the sign correlator (or sign detector), which is the AO detector for noise with the double-exponential noise density function. This simple detector has excellent asymptotic performance characteristics for heavy-tailed noise density functions, of which the double-exponential noise density function is usually taken as a simple representative. Thus it is natural that the relative performances of the LG and SC detectors for Gaussian and double-exponential noise densities are special cases of considerable interest. It turns out that the ARE generally gives a good indication of finite-sample-size relative performance of these detectors for Gaussian noise, but it may considerably over-estimate the advantage of the sign correlator in noise with a double-exponential noise density function. We will see that this is primarily caused by the second key assumption in applying the ARE here: that signal amplitudes is low enough to allow use of first-order approximations. This is a rather stringent condition and requires very weak signals (and therefore large sample sizes) for noise densities with the "peaked" behavior at the origin when used with the sign detector, whose characteristic nonlinearity rises by a single step at the origin. In the case of a sign detection of a weak signal, behavior of the noise pdf at the origin is of particular significance, that the weak-signal approximation is more readily met when the noise density function is flatter at the origin, as in the case of Gaussian noise.

The Sign and Linear Detectors

For the sign correlator detector, in the special case of detection of a constant signal for which the SC detector coefficients are all unity, it is relatively easy to compute the finite-sample-size performance in additive i.i.d. noise. This is because the test statistic then has a distribution which is always based on a binomial distribution with parameters $(n, 1/2)$. The value of q is known under the null hypothesis ($q = 1/2$ for zero-mean noise), and with signal present q can be readily determined as $q = P(W_i > -\theta)$, which is $1 - F(-\theta)$, where F is the distribution function of the noise.

To compare the finite-sample-size performance of the sign detector with that of another detector we still need to obtain the finite-sample-size performance of the other detector, and this may not be as straightforward. However, in the important special case of comparison of the sign detector with the linear detector for an additive constant signal in Gaussian noise, we are able to perform the comparison with relative ease. The linear detector is simply

the linear correlator detector in which the coefficients s_i are again all unity, which is appropriate for the case of additive constant-signal detection. For Gaussian noise the LC detector test statistic has a Gaussian distribution for all sample sizes, making it very easy to compute detection probabilities. This particular finite-sample-size comparison, the sign detector versus the linear detector for constant signal in Gaussian noise, is of considerable interest. The performance of the widely used linear detector (and more generally, of the LC detector) is the benchmark for this type of detection problem, and performance under Gaussian noise is considered important in evaluating detector performance under the signal-present hypothesis. On the other hand, the sign detector is a nonparametric detector of a very simple type, and is able to maintain its design value of false-alarm probability for all noise pdf's with the same value of $F(0)$ as the nominal value (e.g., $F(0) = 1/2$ for zero-median noise). Although one may choose to use detectors such as the sign detector for reasons other than to obtain optimum performance in Gaussian noise, performance under conditions of Gaussian noise, a commonly made if not always valid assumption, is required to be adequate.

Figure 2.7 shows the results of a computation of the power functions for constant-signal detection in additive zero-mean Gaussian noise for the sign and linear detectors. Two different combinations of the sample size ($n = 50, 100$) and false-alarm probability ($\alpha = 10^{-4}, 10^{-5}$) were used to get the two plots. We know that the ARE of the sign detector relative to the linear detector for this situation is 0.64. Do these power function plots allow us to make a quantitative comparison with this asymptotic value of 0.64? We have noted earlier that the ARE can be directly related to the asymptotic SNR ratio required to maintain the same detection probability, for the same n and α , for two detectors. The SNR ratio at any given detection probability value is influenced by the horizontal displacement of the power curves for the sign and linear detectors. A very approximate analysis based on the power functions for $n = 100$ and $\alpha = 10^{-4}$ shows that at both $p_d = 0.8$ and $p_d = 0.4$, we get an SNR ratio (linear detector to sign detector) of approximately 0.63. The SNR here is defined as σ^2/ρ^2 . This should be compared with the ARE of 0.64 for this situation. A similar rough check at $p_d = 0.4$ and 0.6 for $n = 50, \alpha = 10^{-5}$ reveals a slightly smaller SNR ratio. A very preliminary conclusion one may make from such results is that for the values of n and α we have used, the ARE gives a good quantitative indication of actual finite-sample-size relative performance.

This last conclusion (for Gaussian noise) is borne out by some recent results of a study on the convergence of relative efficiency to the ARE done by Michalsky, Wise, and Poor [1092]. In this study the sign and linear detectors have been compared for three types of noise densities. In addition to the Gaussian and

double-exponential noise density the hyperbolic secant (sech) noise density function defined by

$$f(z) = \frac{1}{2} \operatorname{sech}(\pi z/2) \quad (2-82)$$

was considered. This density function has tail behavior similar to that of the double-exponential function, and has behavior near the origin which is similar to that of the Gaussian density function. These properties can readily be established by considering the behavior of the sech function for large and small arguments. Michalsky et al. present their results as a set of plots showing how the efficiency of the sign detector relative to the linear detector behaves for increasing sample sizes. The relative efficiency is defined as a ratio of sample sizes k and $n(k)$ required by the linear and sign detectors respectively, to achieve the same values for α and p_d . Their procedure was to pick a value for α and set $p_d = 1 - \alpha$, and then to determine the signal amplitude $\rho(k)$ as a function of k required for the linear detector to achieve this performance, for increasing values of k starting from $k = 1$. Then for each k and signal amplitude $\rho(k)$ the number of samples $n(k)$ required by the sign detector for the same α and p_d was computed. For the double-exponential and sech noise pdf's closed-form expressions are available for the density function of the linear detector test statistic; numerical integration was used to perform the computations for the threshold and randomization probabilities and the detection probabilities.

Figure 2.8 is reproduced from the paper by Michalsky et al. It shows the ratio $k/n(k)$, the computed relative efficiency of the sign detector relative to the linear detector, as a function of k for Gaussian noise and $\alpha = 10^{-4}$. Also shown on this figure is a plot of the estimated relative efficiencies based on use of the Gaussian approximation for the sign detector test statistic. We see that for this case where $\alpha = 10^{-4}$ and $p_d = 1 - 10^{-4}$ the relative efficiency is above 0.55, within about 15% of the ARE, for $k \geq 38$. A general conclusion which can be made from the results obtained for this case is that as α decreases, the relative efficiencies converge more closely to the ARE value. One reason for this may be that the ARE result is based on Gaussian approximations to the distributions of the test statistics (in this case the sign detector statistic). For decreasing α , the threshold setting obtained from the tail region of the Gaussian approximation will be accurate only for larger sample sizes. Another reason is that in this study p_d was set to equal $1 - \alpha$, so that p_d increases as α decreases, requiring larger signal amplitudes. Before we discuss this in more detail let us note some other interesting results obtained in the paper by Michalsky et al.

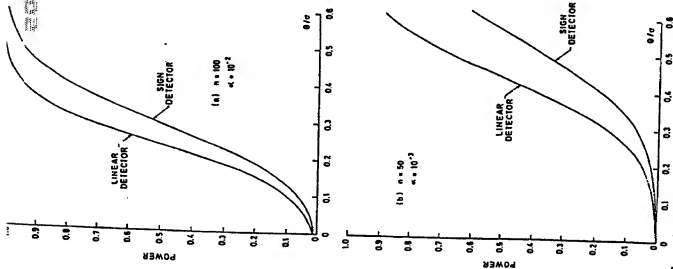


Figure 2.7 Finite-Sample-Size Performance of Linear and Sign Detectors for Constant Signal s in Additive Gaussian Noise with Variance σ^2

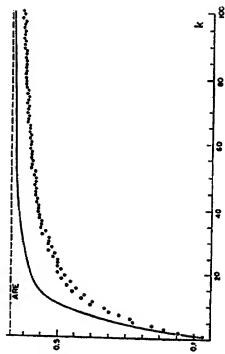


Figure 2.8 Relative Efficiency of the Sign Detector Compared to the Linear Detector for Gaussian Noise at $\alpha = 10^{-4}$. The Smooth Curve Is Obtained from the Gaussian Approximation. (From Michalaky et al. 1982)

Figures 2.9(a) and (b) and Figure 2.10 are also reproduced from this paper. Figure 2.9(a) for $\alpha = 10^{-3}$ and double-exponential noise shows a very slow convergence of the relative efficiency of the sign detector relative to the linear detector, to the ARE value of 2.0. It also shows that the relative efficiency can be approximated very well by its estimate based on the Gaussian approximation, with the same measured variances as the exact distributions of the sign and linear detector test statistics. The Gaussian approximation is used in the following way: for each value of k the linear detector test statistic is assumed to be Gaussian with mean $k\hat{\mu}(k)$ and variance $k\hat{\sigma}^2$. The threshold is set for $\hat{\mu}(k) = 0$ then obtained for P_t to equal $1 - \alpha$, again using the Gaussian approximation for the linear detector statistic. This signal strength is now an estimate $\hat{\mu}(k)$ of the correct signal strength. This estimated signal strength is then used to find the binomial parameter $\hat{p} = P\{W_i > -\hat{\mu}\}$ needed to find the mean and variance of the sign detector statistic. Finally, again based on the Gaussian approximations for the sign detector test-statistic distributions, the sign detector sample size $n(k)$ is determined to allow it to have the same value for α and $P_t = 1 - \alpha$, with the same signal strength $\hat{\mu}(k)$. Use of the Gaussian approximation allows relative

efficiencies to be easily computed for larger values of k . The result is shown in Figure 2(b), where the relative efficiency estimates are shown as a function of both k and $\hat{h}(t)$ for values of k beyond the largest shown in Figure 2(a). Figure 2(b) shows that to obtain a relative efficiency of 1.5 one needs to use more than 600 observations for the linear detector (and more than 400 observations for the sign detector). This rather slow convergence to the ARE value is our first indication that the use of the ARE may not always be justified when one is interested in the finite-sample-size relative performance of two detectors.

The rather different behaviors of the relative efficiencies of the sign and linear detectors for these two noise densities (Gaussian and double-exponential) is not something which could not have been predicted. We have remarked that we make use of two approximations in obtaining the ARE. One is the Gaussian approximation for the distribution of the test statistics. Figure 2(a) shows that this is probably quite valid for this particular case. The other approximation we make is that θ is small enough to essentially allow use of the expansion $1 - F(-\theta) \approx 0.5 + \theta f(\theta)$, where f is the noise density function. For the case of Gaussian noise the density is smooth at the origin and $f'(0) = 0$. In contrast, the double-exponential density is peaked at the origin with non-zero values for the one-sided derivatives there. For the unit-variance double-exponential density we have $f(0) = 1/\sqrt{2}$ and $f'(0) = 1$. Thus the signal has to be weaker before the approximation $1 - F(-\theta) \approx 0.5 + \theta f(0)$ becomes valid for the double-exponential density, as compared to the Gaussian density. Consider, for example, the case corresponding to $k = 100$ in Figure 2(b) (for $\alpha = 10^{-3}$), for which the signal strength $\theta(t)$ is estimated to be 0.92. [This is actually $\hat{h}(t)/\alpha$, the variance σ^2 being 1 here.] Let us compute the exact value of $1 - F(-\theta)$ to $0.5 + \theta f(0)$ for $\theta = 0.92$ for the unit-variance double-exponential density. A simple computation shows that $1 - F(-\theta) = 0.792$, whereas $0.5 + \theta f(0) = 0.938$, a rather poor approximation. On the other hand, for unit-variance Gaussian noise we get $1 - F(-\theta) = 0.732$ and $0.5 + \theta f(0) = 0.747$ for $\theta = 0.92$, which shows that the approximation is very good for Gaussian noise. For $k = 4000$ we have $\hat{h}(t) = 0.1$ from Figure 2(b). For $\theta = 0.1$ we find for the unit-variance double-exponential density that $1 - F(-\theta) = 0.560$ and $0.5 + \theta f(0) = 0.571$, which are close. The relative efficiency at $k = 4000$ is seen to be approximately 1.75.

In general we would expect that for any noise density with a local maximum at the origin the relative efficiency of the sign detector relative to the linear detector will be less than its ARE, assuming that k is large enough for the Gaussian approximation to be valid. This is because the Gaussian approximation $1 - F(-\theta) \approx 0.5 + \theta f(0)$ is then always larger than the correct value of $1 - F(-\theta)$, making the ARE a more optimistic measure of




Figure 2(a) Relative Efficiency of the Sign Detector Compared to the Linear Detector for Double-Exponential Noise at $\alpha = 10^{-3}$. The Smooth Curve Is Obtained from the Gaussian Approximation. (From [Michalsky et al. 1982])




Figure 2(b) The Gaussian Approximation to the Relative Efficiency of the Sign Detector Compared to the Linear Detector for Double-Exponential Noise at $\alpha = 10^{-3}$, as a Function of the Gaussian Approximation $\hat{h}(t)$ to the Signal Strength (Normalized by α). (From [Michalsky et al. 1982])

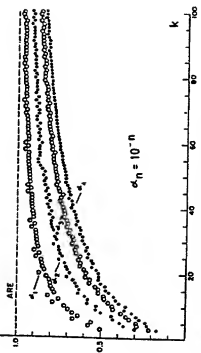


Figure 2.10 Relative Efficiency Curves for the Sign Detector Compared to the Linear Detector for Speech Noise, for Different Values of α (From Michalsky et al. 1982)

than is the case for the sign detector relative to the linear detector. In fact here one observes very interesting behavior; the relative efficiency actually overshoots the ARE value and then converges to it from above. It is possible to give this overshoot phenomenon an explanation similar to that which explains the convergence from below to the ARE values in our discussion above.

In several other sections in the following chapters we will discuss specific finite-sample-size performance results for particular detectors. Our general conclusion may be summarized as follows. In most cases the use of efficacies and ARE's allows one to make valid qualitative comparisons of different detectors. In many cases the ARE gives a fairly good quantitative indication of finite-sample-size relative performance. In some cases, particularly for the sign detector and pdf's such as the double-exponential noise density function, convergence to the asymptotic value may be quite slow. As a basis for the preliminary design, analyses, and comparison of detection systems, the use of efficacies and ARE's are very convenient and appropriate. As a second step it is highly desirable that some exact finite sample detection performance characteristics be obtained, or that the detector be simulated, to back up conclusions of asymptotic analysis, to fine-tune a design, or to make clear the ranges of applicability of the ARE in performance comparisons. We have also seen that sometimes a simple analysis of the asymptotic approximations made in defining the ARE can give some valuable insights about finite-sample-size relative performance.

the sign detector relative performance. Since in the study by Michalsky et al. [1982] it was always assumed for computational convenience that $p_i = 1 - \alpha$, decreasing α leads to increasing p_i and hence increasing signal strengths for each value of k . Thus it is to be expected that the relative efficiencies will converge more slowly to the ARE as α is decreased.

Figure 2.10 shows a set of plots for different values of α of the relative efficiency of the sign detector relative to the linear detector for the speech noise density function. The ARE value here is 1. The slower convergence rate as α is decreased is apparent in this figure. In addition, we see the expected convergence behavior, which is between that for the double-exponential and Gaussian densities. Prior to the above-described study Miller and Thomas [1975] had also undertaken a numerical study on the convergence of the relative efficiency to the ARE of an asymptotically optimum sequence of detectors compared to the linear detector for the detection of a constant signal in noise with a double-exponential density function. The AO sequence of detectors used was the sequence of GC detectors which are Neyman-Pearson optimum for each n ; with increasing n the signal amplitude decreases to maintain a fixed value for the detection probability. The relative efficiency in this numerical study was defined as a ratio of sample size required to make the performances of two detectors the same at given values of $p_i = \alpha$ and $p_i = 1 - \alpha$ for a given value of signal amplitude. The conclusion of Miller and Thomas was also that in this particular situation the relative efficiency can converge rather slowly to its maximum value, which is the ARE value of 2.0. Some further numerical results for this particular case of detection of a constant signal in noise with a double-exponential density function have been given by Marks, Wise, Haldeman, and Whitted [1978]. The case of time-varying signal has been considered by Liu and Wise [1983]. More recently Deid and Marks [1987] have studied further the relative performances of the linear, sign, and optimum detectors for double-exponential noise pdf's and have again reached the same conclusion.

Another type of GC detector which is not too difficult to analyze for finite-sample-size performance is the quantizer-correlator (QC) detector which we shall consider in Chapter 4. In the QC detector the characteristic g of a GC detector is a piecewise-constant quantizer nonlinearity q . For Gaussian noise the performances of QC detectors relative to the LG detector generally follow quite closely the predictions based on asymptotic comparisons. For the double-exponential noise density Michalsky et al. [1982] also considered the simple three-level symmetric QC detector with a middle level of zero, called the *dead-zone limiter* (DZL) detector. Their numerical results indicate that the efficiency of the DZL detector relative to the linear detector for this noise density does converge more rapidly to the ARE value

2.5 Locally Optimum Bayes Detection

We will now briefly consider the binary signaling problem where one wishes to decide between two known signal sequences in the model given by (2-1), rather than make a choice between noise only and a known signal in noise for the X_i .

Let $\{s_{0i}, i = 1, 2, \dots, n\}$ and $\{s_{1i}, i = 1, 2, \dots, n\}$ be two known signal sequences of which one is present in the observations, with non-zero amplitude θ . Retaining our assumption of independence and identical distributions for the additive noise components W_i , the likelihood ratio for this hypothesis-testing problem becomes

$$L(X) = \frac{\prod_{i=1}^n f(X_i - \theta_{1i})}{\prod_{i=1}^n f(X_i - \theta_{0i})} \quad (2-83)$$

Let $P_i > 0$ be the *a priori* probability that the signal sequence $\{s_{1i}, i = 1, 2, \dots, n\}$ has been received in noise, $j = 0, 1$. Of course $P_0 + P_1 = 1$. Let c_{ij} be the cost of deciding that the j -th signal was transmitted when in fact the i -th one was transmitted, for $j, k = 0, 1$. We will assume that $c_{ii} = 0$ and that $c_{ji} > 0$ for $j \neq i$. Then the Bayes detector minimizing the Bayes risk is one implementing the test

$$L(X) > \frac{c_{01}P_0}{c_{10}P_1} \quad (2-84)$$

With $L(X)$ exceeding the right-hand side above the signal sequence $\{s_{1i}, i = 1, 2, \dots, n\}$ is decided upon.

Denoting by $\exp(t)$ the right-hand side of (2-84), we have the equivalent form for the above test,

$$\sum_{i=1}^n \ln f(X_i - s_{1i}) > k + \sum_{i=1}^n \ln f(X_i - s_{0i}) \quad (2-85)$$

Now using a Taylor series expansion for $\ln f(x - u)$ about $u = 0$, assuming sufficient regularity conditions on f , we obtain as another equivalent form of the above test,

$$\theta \sum_{i=1}^n (s_{1i} - s_{0i})/h_{00}(X_i) + \frac{\theta^2}{2} \sum_{i=1}^n (s_{1i}^2 - s_{0i}^2) \left[\frac{f''(X_i)}{f(X_i)} - h_{00}''(X_i) \right] + o(\theta^3) > k \quad (2-86)$$

where h_{00} has been defined in (2-33).

This result allows some interesting interpretations. For a finite sample size n , in the case of vanishing signal strengths (the local case), by ignoring second-order and higher-order terms we find that the Bayes detector implements the locally optimum Bayes test

$$\theta \sum_{i=1}^n (s_{1i} - s_{0i})/h_{00}(X_i) > k \quad (2-87)$$

Notice that the test statistic on the left-hand side above contains the signal amplitude θ explicitly. Suppose, for example, that k is positive because $c_{10} > c_{01}$ and $P_0 = P_1$ in (2-84). This means that the error of falsely deciding that the type $s_{1i}, i = 1, 2, \dots, n$, were transmitted is more costly than the other type of error. Then for a given set of observations X_1, X_2, \dots, X_n , the assumed small value of $\theta \ll \sigma$ will influence the final decision made by the detector. As θ becomes smaller the observations become less reliable as an objective means for discriminating between the two signal alternatives, and the decision which is less costly when no observations are available tends to be made by the detector.

In the special but commonly assumed case of equal costs and prior probabilities we have $k = 0$ in (2-87) and θ can then be dropped from the left-hand side. The resulting locally optimum Bayes detector then has the structure of the LO detector based on the Neyman-Pearson criterion, with the threshold now fixed to be zero.

In considering the asymptotic situation $n \rightarrow \infty$ and $\theta \rightarrow 0$ simultaneously, we have to specify the relationship between θ and n . Let us assume, as we have done in Section 2.3, that $\theta = \gamma/\sqrt{n}$ for some fixed $\gamma > 0$. Further, we will assume that the signal sequences have finite average powers,

$$0 < \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=1}^n s_{ji}^2 = P_j^2 < \infty \quad (2-88)$$

for $j = 0, 1$. Under these conditions we find that the second plus higher-order term on the left-hand side of (2-86) converges in probability under both alternatives to a constant which is

$$\lim_{n \rightarrow \infty} \frac{\theta^2}{2n} \sum_{i=1}^n (s_{1i}^2 - s_{0i}^2) \left[\frac{f''(X_i)}{f(X_i)} - h_{00}''(X_i) \right] = -\frac{\gamma^2}{2} (P_1^2 - P_0^2) f(1) \quad (2-89)$$

Here $\langle f \rangle$ is the Fisher information for location shift for the noise pdf f .

Using this result we obtain the locally optimum Bayes test, which retains its optimality under the specific asymptotic situation $n \rightarrow \infty$, $\epsilon \rightarrow 0$, and $k/n \rightarrow \gamma > 0$ to be

$$\theta \sum_{i=1}^n (y_{1i} - \epsilon_0) h_{20}(\tilde{X}_i) > k + \frac{\gamma^2}{2} (P_1^2 - P_2^2) / \langle f \rangle \quad (2-90)$$

The effect of letting θ approach zero for a fixed, finite n is to make $\gamma \rightarrow 0$ (set $\gamma = k/n$), which gives us the locally optimum Bayes detector. We find that when $P_1^2 = P_2^2$ the locally optimum Bayes detector employing the test of (2-87) does retain its optimality asymptotically. Otherwise, the second "bias" term has to be added to the threshold in (2-90) as a necessary condition for asymptotic optimality.

The important practical result from the above development is that for the commonly assumed case of equal costs for the two types of errors, equal *a priori* probabilities for the two alternatives about the signal, and antipodal signaling ($\epsilon_{1i} = -\epsilon_{2i}$, $i = 1, 2, \dots, n$), the locally optimum Bayes detector is based on the test

$$\sum_{i=1}^n (y_{1i} - \epsilon_0) h_{20}(\tilde{X}_i) > 0 \quad (2-91)$$

This also yields an asymptotically optimum sequence of Bayes detectors. More generally a non-zero threshold, modified by an additive bias term, and normalized by dividing with the signal amplitude ϵ , is required.

Our results for the locally and asymptotically optimum Bayes detectors required particular attention to be focused on the "bias" term in the threshold and on the signal amplitude ϵ which is in general necessary to obtain the correct threshold normalization. This is to be contrasted with the LO and AO detectors based on the Neyman-Pearson criterion. There the threshold setting is decided at the end to obtain the required false-alarm probability, any simplifying monotonic transformations of the test statistic being permissible in the intermediate steps in deriving the final structure of the threshold test.

The derivation and analyses for locally and asymptotically optimum Bayes detection schemes for known binary signals has been considered by Middleton [1966] and also more recently by him [1984]. This latter paper, as well as Spaulding and Middleton [1977a], give detection performance results based on upper bounds

on the error probabilities and also based on the asymptotic Gaussian distributions of the test statistic for noise pdf's modeling impulsive noise. Some performance results have also been given by Spaulding [1985] for the LO Bayes detector. Maraz, Davidson, and Hoch [1985a] give detection performance results for the Middleton Class A noise model which we shall discuss briefly in the next chapter. An interesting sub-optimum GO detection scheme has also been suggested by Hug [1989].

2.8 Locally Optimum Multivariate Detectors

In this last section we will consider a generalization of our basic model (2-1) for the univariate observations X_i that we have been concerned with so far. We will here study the case where we have a set of i.i.d. multivariate or vector observations $Y_i = (X_{1i}, X_{2i}, \dots, X_{Li})$ described by

$$Y_i = \theta Y_i + V_i, \quad i = 1, 2, \dots, n \quad (2-92)$$

Now the $Y_i = (y_{1i}, y_{2i}, \dots, y_{Li})$ are known L -variate signal vectors and the $V_i = (v_{1i}, v_{2i}, \dots, v_{Li})$ are, for $i = 1, 2, \dots, n$, a set of i.i.d. random noise vectors with a common L -variate density function f .

Such a model for multivariate observations can describe the outputs of L receivers or sensors forming an array, designed to pick up a signal from a distant source in a background of additive noise. At each sampling time the L sensor outputs are obtained simultaneously. The noise in each sensor may be correlated with noise in other sensors at any one sampling instant, although our model above requires the noise samples to be temporally independent. The signal arrives as a propagating plane wave from a particular direction, so that the components of each Y_i are delayed versions of some common signal waveform in this type of problem.

Another application in which the model is appropriate is that in which a scalar observed waveform possibly containing a known signal is sampled in periodic bursts or groups of L closely spaced samples. If sufficient time is allowed between each group of L samples the groups may be assumed to be independent. Such a scheme samples within each group may be dependent. Another application can be used to improve the performance of a detector which is constrained to operate on independent samples only, allowing it to use more data in the form of independent multivariate samples. We shall see in Chapter 5 that for detection of a narrowband signal which is completely known in additive narrowband noise we can interpret the in-phase and quadrature observation components as having arisen from such a sampling scheme with $L = 2$.

Under the signal-present hypothesis the density function f_Y of the set of n observation vectors $Y = (Y_1, Y_2, \dots, Y_n)$ is now

$$f_Y(Y) = \prod_{i=1}^n f(Y_i - \theta_i) \quad (2-93)$$

keeping in mind that f is now a function of an L -component vector quantity. The LO detector now has a test statistic

$$\begin{aligned} \lambda_{LO}(Y) &= \frac{\int_{-\infty}^{\infty} \int_Y f(Y|\theta) d\theta}{\int_Y f(Y|0)} \\ &= \frac{\int_{-\infty}^{\infty} \frac{\frac{d}{d\theta} f(Y - \theta_i)}{f(Y_i)} d\theta}{\int_Y f(Y_i)} \\ &= \sum_{i=1}^n r_i \left[\frac{-\nabla f(Y_i)}{f(Y_i)} \right]^T \end{aligned} \quad (2-94)$$

where ∇f is the gradient vector defined by

$$\nabla f(Y) = \left[\frac{\partial f(Y)}{\partial \theta_1}, \frac{\partial f(Y)}{\partial \theta_2}, \dots, \frac{\partial f(Y)}{\partial \theta_n} \right] \quad (2-95)$$

This result reduces to our result of (2-32) for $L=1$. In our more general case here the locally optimum vector nonlinearity is

$$\begin{aligned} g_{LO}(Y_i) &= -\frac{\nabla f(Y_i)}{f(Y_i)} \\ &= -\nabla \ln f(Y_i) \end{aligned} \quad (2-96)$$

We see that if $f(Y) = \prod_{i=1}^n f(Y_i)$ the test statistic of (2-94) is simply our earlier LO statistic of (2-32), applied to nL independent observations.

Consider a multivariate GG test statistic

$$T_{GG}(Y) = \sum_{i=1}^n a_i g^T(Y_i) \quad (2-97)$$

where $g(Y_i) = [g_1(Y_i), g_2(Y_i), \dots, g_L(Y_i)]$, each g_j being a real-valued function of an L -vector. It can be shown quite easily that the efficacy of such a test statistic for our detection problem is

$$\xi_{GG} = \lim_{\rho \rightarrow \infty} \frac{\left[\sum_{i=1}^n a_i \int_{\mathbb{R}^L} g^T(Y) g_{LO}(Y) f(Y) dY \right]^2}{n \sum_{i=1}^n a_i \int_{\mathbb{R}^L} g^T(Y) g(Y) f(Y) dY a_i^2} \quad (2-98)$$

With $g = g_{LO}$ and $a_i = r_i$ we get the maximum efficacy

$$\xi_{GG, LO} = \lim_{\rho \rightarrow \infty} \frac{1}{n} \sum_{i=1}^n r_i U_i / r_i^2 \quad (2-99)$$

where $U_i(\cdot)$ is the matrix defined by

$$U_i(\cdot) = E[g_{LO}^T(Y_i) g_{LO}(Y_i)] \quad (2-100)$$

which is Fisher's information matrix corresponding to the function $f(\cdot)$ of (2-12) in the univariate case.

Suppose that f is the multivariate Gaussian density,

$$f(Y) = \frac{1}{(2\pi)^{L/2} (\det \Lambda)^{1/2}} e^{-\frac{1}{2} Y^T \Lambda^{-1} Y} \quad (2-101)$$

where Λ is the covariance matrix. Then we find that

$$g_{LO}(Y_i) = -Y_i \Lambda^{-1} \quad (2-102)$$

and the LO test statistic is the matched filter statistic

$$\lambda_{LO}(Y) = \sum_{i=1}^n r_i \Lambda^{-1} Y_i^T \quad (2-103)$$

In Chapter 5 we will be considering essentially LO test statistics for the bivariate case with the bivariate density function f being circularly symmetric so that $f(v_1, v_2) = \Lambda(v_1^2 + v_2^2)$. A special case of this is the bivariate Gaussian density for two i.i.d. Gaussian components. The model for multivariate observations that we have treated here has been used by Martinez, Swaszek, and Thomas [1984] to obtain locally optimum detectors.

nonlinearity

Problem 2.1

Verify that the maximum likelihood estimate $\hat{\theta}_{ML}$ of θ under K_1 of (2-14) for the double-exponential noise pdf is obtained as a solution of (2-24).

Problem 2.2

Draw a block diagram for an implementation of the test statistic $\bar{\lambda}(X)$ of (2-22) and (2-23), using multipliers, adders, accumulators, and a fixed nonlinearity.

Problem 2.3

Show that the limiting value of the power of a sequence of size α GC detectors for $H_{1,\alpha}$ versus $K_{1,\alpha}$ of (2-42) with $\theta_\alpha = \gamma/\sqrt{n}$ is given by (2-65).

Problem 2.4

Prove that the Gaussian pdf minimizes $\sigma^2 I(f)$, where $I(f)$ is the Fisher information for location, from among all absolutely continuous pdf's.

Problem 2.5

Consider the GC detector based on the soft-limiter nonlinearity

$$\underbrace{\begin{matrix} \vee & \vee & \vee \\ \wedge & \wedge & \wedge \\ \wedge & \wedge & \wedge \\ \vee & \vee & \vee \end{matrix}}_{\delta(x)\delta}$$

for some constant $\epsilon \geq 0$. Obtain the ARE of this GC detector relative to the LG detector (both using the same GC coefficients for H_1 versus K_1 of (2-13) and (2-14), when the pdf f is symmetric about the origin. Obtain the limiting values of the ARE for $\epsilon \rightarrow 0$ and $\epsilon \rightarrow \infty$. Compute the ARE for $\epsilon = 3\sigma$ with f the Gaussian density with variance σ^2 . Comment on the implication of this result.

Problem 2.8

Consider the GC detector based on the dead-zone limiter

$$\begin{array}{c} \begin{array}{ccc} & \vee & \\ \vee & \text{VI} & \vee \\ \wedge & \text{—} & \vee \\ \text{H} & \text{—} & \text{H} \\ & \cdot & \\ & \cdot & \\ & \cdot & \end{array} \\ \underbrace{\quad \quad \quad}_{\text{I O I}} \\ \text{I} \\ \text{O} \\ \text{I} \end{array}$$

for some constant $\epsilon \geq 0$. Obtain the ARE of this GC detector relative to the LC detector for symmetric f in H_1 versus K_1 of (2-13) and (2-14). Obtain the limiting value for the ARE when $\epsilon \rightarrow 0$. Find the optimum value of ϵ maximizing the ARE for Gaussian f , and determine the maximum ARE value.

Problem 2.7

The "hole-puncher" function

$$\left. \begin{array}{c} \text{H} \quad \text{O} \\ \text{VI} \quad \text{V} \\ \hline \text{H} \quad \text{H} \end{array} \right\} = \text{H}^{\text{H}}(x)$$

may be used as the detector nonlinearity for a GC detector. Obtain the efficacy of the resulting detector for f the Cauchy pdf

$$f(x) = \frac{1}{x} = \frac{1}{1 + (x/a)^2}$$

in testing H_1 versus K_1 of (2-13) and (2-14), and find the optimum value of c/σ maximizing this efficacy. What is the limiting value of the efficacy as $c \rightarrow \infty$? Explain your result.

Problem 2.8

The characteristic g of a GG detector is a linear combination of functions in a set $\{g_1, g_2, \dots, g_M\}$ which is orthonormal with respect to the weighting function f , the noise pdf. Show that the efficacy of an AO GG detector of this type is the sum of the efficacies of detectors based on the individual g_i , $i = 1, 2, \dots, M$.

Problem 2.9

Develop a possible explanation for the overshoot phenomenon mentioned at the end of Section 2.4 in our discussion of numerical results on convergence of relative efficiencies to the ARE for the dead-zone limiter detector relative to the linear detector.

SOME UNIVARIATE NOISE PROBABILITY DENSITY FUNCTION MODELS

3.1 Introduction

In this chapter we will apply the results we have derived so far to some particular models for univariate non-Gaussian noise probability density functions. The models we will consider have been found to be appropriate for modeling non-Gaussian noise in different systems. A large number of investigations have been carried out over the course of the last forty years on the characteristics of noise processes encountered in different environments. In particular, there has been much interest in characterization of underwater acoustic noise, urban and man-made RF noise, low-frequency atmospheric noise, and radar clutter noise. For such situations it is well-recognized that the mathematically appealing simple Gaussian noise model is often not at all appropriate. It is not within the scope of this book to detail the development of the non-Gaussian noise models that we will describe here, and we will have to refer the reader to the relevant literature to gain an understanding of the basis for the models.

There is one common feature, however, that all these models share. This is that they specify noise density functions which in their tails decay at rates lower than the rate of decay of the Gaussian density tails. The essential implication of this fact is that non-Gaussian noise which tends to occur in practice is generally more likely to produce large-magnitude observations than would be predicted by a Gaussian model (satisfying the same constraint on some scale characteristic, such as a noise percentile). We should then expect the optimum and locally optimum detectors to employ some nonlinear characteristic f tending to reduce the influence of large-magnitude observations on the test statistic. This should be expected because large-magnitude observations will now be less reliable (compared to the Gaussian case) in indicating the absence or presence of a signal. We will, indeed, observe this general characteristic.

As an example illustrating the above statements, let us briefly examine some results which have been reported for the noise affecting ELF (extremely low frequency) communication systems. In studies described by Evans and Griffiths [1974], the non-Gaussian atmospheric noise caused by lightning activity in local and distant storms is identified as the major limiting factor in long-range ELF communication systems operating in the range 3 to 300 Hz. The characteristic feature of noise in this band is the

occurrence of impulse-like components, in a background noise waveform due to low attenuation of numerous distant atmospheric noise sources. A typical recording of a noise waveform in this band of frequencies is shown in Figure 3.1. Figure 3.2 shows a typical amplitude probability distribution function for such noise, obtained from empirical data. For comparison, Figure 3.2 also shows a Gaussian distribution function with the same variance. Evans and Griffiths [1974] also present an interesting graph showing the locally optimum nonlinearly f_{LO} obtained for an empirically determined noise probability density structure; this is given here as Figure 3.3. Further details on receiver structures employing such nonlinear processing for ELF systems have been given by Bernstein, McNeil, and Richter [1974] and Rowe [1974]. An overview of ELF communication systems may be found in [Bernstein et al., 1974]. Modestino and Sankar [1974] have given some specific models and results for ELF noise. More recently, several suboptimal detectors as well as the locally optimum detector have been studied by Ingram [1984], who obtained detection performance characteristics for ELF atmospheric noise.

We will obtain nonlinear characteristics of the nature of that shown in Figure 3.3 for the types of noise models we will now consider analytically. The first type of model we will consider defines noise density functions as generalizations of well-known univariate densities, one of them the Gaussian density. These have been found to provide good fits in some empirical studies. The second case we will consider is that of mixture noise, which can be given a statistical as well as a physical basis. It will also be shown that a useful noise model developed by Middleton is closely related to the mixture model. We conclude this chapter with a brief discussion of strategies for adaptive detection when the noise probability density function cannot be assumed to be *a priori* known.

3.2 Generalized Gaussian and Generalized Cauchy Noise

The convenient mathematical properties of the Gaussian probability density function have to be given up, at least partially, in order to obtain density function models which are better descriptions of the noise and interference encountered in many real-world systems. As we have remarked above, the presence of impulsive components tends to produce noise density functions with heavier tails than those of the Gaussian densities. One way to obtain such modified tail behavior is to start with the Gaussian density function and to allow its rate of exponential decay to become a free parameter. In another approach we start at the other extreme case of algebraic tail behavior of the Cauchy noise probability density function, and introduce free parameters to allow a range of possibilities which includes the Gaussian as a special case.

A generalized Gaussian noise density function is a symmetric, unimodal density function parameterized by two constants, the variance σ^2 and a rate-of-exponential-decay parameter $k > 0$. It is defined by

$$f_k(x) = \frac{k}{2\lambda(k)\Gamma(1/k)} e^{-1/2} |x/\sigma|^{1/k} \quad (3-1)$$

where

$$\lambda(k) = \left[\frac{\sigma^2 \Gamma(1/k)}{\Gamma(3/k)} \right]^{1/2} \quad (3-2)$$

and Γ is the gamma function:

$$\Gamma(x) = \int_0^\infty t^{x-1} e^{-t} dt \quad (3-3)$$

We find that for $k=2$ we get the Gaussian density function, and for lower values of k the tails of f_k decay at a lower rate than for the Gaussian case. The value $k=1$ gives us the double-exponential noise density function. Figure 3-4 shows the shapes of $f_k(x)$ for different k , with the variance $\sigma^2=1$ for all k . Thus the class of generalized Gaussian density functions allows us to conveniently consider a spectrum of densities ranging from the Gaussian to those with relatively much faster or much slower rates of exponential decay of their tails. Agazzi and Lerner [1964] indicate that generalized Gaussian densities with k around 0.5 can be used to model certain impulsive atmospheric noise.

For the generalized Gaussian noise densities we find that the locally optimum nonlinearities g_{LO} are, from (2-33),

$$g_{LO}(z) = \frac{k}{[\lambda(k)]^{1/k}} |z|^{1-1/k} \text{sgn}(z) \quad (3-4)$$

These are, as expected, odd-symmetric characteristics, since the f_k are even functions. Note that for $k=2$ we get $g_{LO}(z) = z/\sigma^2$, the result of (2-39), and for $k=1$ we get $g_{LO}(z) = (\sqrt{2}/\sigma) \text{sgn}(z)$, which agrees with the result of (2-38). Figure 3-5 shows the normalized versions $[\lambda(k)]^{1/k} f_k(x)$ and $g_{LO}(x)$ for the generalized Gaussian densities. Observe that the case $k=1$ separates two distinct types of behavior. For $k > 1$ the nonlinearities f_{LO} are continuous at the origin and increase monotonically to $+\infty$ for increasing z , whereas for $k < 1$ there is an infinite discontinuity at the origin and g_{LO} decreases monotonically to zero as z increases from zero.

It is quite easy to establish that the Fisher information $I(f_k)$ for the generalized Gaussian density function is

$$I(f_k) = \frac{k^2 \Gamma(3/k) \Gamma(2-1/k)}{\sigma^2 \Gamma(1/k)} \quad (3-5)$$

which is finite for $k > 0.5$. We can now compare the performance of the LC detector, which is optimum for Gaussian noise, with that of the LO detector based on g_{LO} of (3-4) when the noise density is the generalized Gaussian density f_k . From (2-77) we easily obtain the normalized efficacy ξ_{LC} of the LC detector for any noise density function f to be

$$\xi_{LC} = \frac{1}{\sigma^2} \quad (3-6)$$

where σ^2 is the noise variance. Then we find that the ARE of the LO detector for noise pdf f_k , relative to the LC detector, computed for the situation where f_k is the noise density function, is [from (2-76)]

$$\begin{aligned} ARE_{LO,LC} &= 1/ARE_{LC,LO} \\ &= \sigma^2 I(f_k) \\ &= \frac{k^2 \Gamma(3/k) \Gamma(2-1/k)}{\Gamma^2(1/k)} \end{aligned} \quad (3-7)$$

For $k=2$ we have, of course, $ARE_{LO,LC} = 1$, and $k=1$ gives us $ARE_{LO,LC} = 2$ for double-exponential noise. Figure 3-6 shows $ARE_{LO,LC}$ as a function of k . We emphasize that this is the ARE of the LO detector for f_k relative to the LC detector, when f_k is the noise density. Thus explicit knowledge of the non-Gaussian nature of the noise density function can be exploited to get significantly more efficient schemes than the LC detector.

As an example of the comparison of two fixed nonlinearities, let us consider $ARE_{SC,LO}$ as a function of k for the generalized Gaussian noise pdf given by (3-1). Applying the result (2-76), we conclude easily that

$$\begin{aligned} ARE_{SC,LO} &= 4\sigma^2 f_k(0) \\ &= \frac{k^2 \Gamma(3/k)}{\Gamma^2(1/k)} \end{aligned} \quad (3-8)$$

Because the sign correlator (SC) detector is the LO detector for $k=1$, we find that $ARE_{SC,LC}$ agrees with $ARE_{LO,LC}$ of (3-7) for

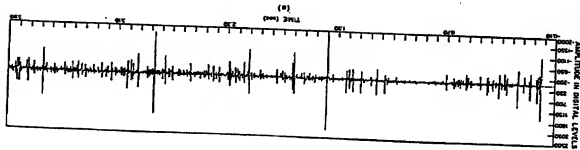


Figure 3.1 Sample Function of Typical ELF Noise Process (from Evans and Griffiths [1974]) © 1974 IEEE




Figure 3.2 Amplitude Probability Distribution of Typical ELF Noise (from Evans and Griffiths [1974]) © 1974 IEEE




Figure 3.3 Locally Optimum Nonlinearity for Empirically Determined ELF Noise PDF (from Evans and Griffiths [1974]) © 1974 IEEE

$A = 1$. Otherwise, $ARE_{SC,LC}$ is less than $ARE_{LC,LC}$. Nonetheless, as shown in Figure 3.6, the simple SC detector is significantly more efficient than the LC detector for all $k \leq 1$.




Figure 3.4 Generalized Gaussian Probability Density Functions ($\sigma^2 = 1$)

3.2.2 Generalized Cauchy Noise

The other class of noise density functions which is useful in studying the shapes of the nonlinearities L_O for a range of noise characteristics is the class of *generalized Cauchy densities*. A generalized Cauchy density is defined in terms of three parameters σ^2 , $k > 0$ and $v > 0$ by

$$f_{k,v}(x) = \frac{B(k,v)}{\left\{ 1 + \frac{1}{v} \left[\frac{x}{A(k)} \right]^v \right\}^{v+1/2}} \quad (3-9)$$

where

$$B(k,v) = \frac{k v^{1/2} \Gamma(v+1/2)}{2 A(k) \Gamma(v) \Gamma(1/2)} \quad (3-10)$$

and where $A(k)$ is defined by (3-2). The density function $f_{k,v}(x)$ has an algebraic rather than an exponential tail behavior. We see from (3-9) that the tails of the density function decay in inverse proportion to $|x|^{v+1/2}$ for large $|x|$. For $k=2$ and $v=1/2$




Figure 3.5 Normalized LO Nonlinearities for Generalized Gaussian PDF's

the density function becomes the Cauchy density,

$$f_{1,1/2}(x) = \frac{1}{\pi v} \frac{1}{1 + (x/\rho)^2} \quad (3-11)$$

showing that σ^2 is in general a scale parameter but not the variance.

The Cauchy density itself does not have a finite variance. In spite of this non-physical property, it has been considered to be useful in modeling impulsive noise. One justification for this is that if a detector has acceptable performance in such noise, then it will most likely have acceptable performance in actual impulsive noise. In addition to being a generalization of the Cauchy noise density, the generalized Cauchy density of (3-9) includes as a special case a model for impulsive noise proposed by Mertz [1961]. From the amplitude density function of the impulsive noise proposed by Mertz, an assumption of symmetry of the noise density function leads to the generalized Cauchy density with $k=1$. Furthermore, a model for impulsive noise proposed by Hall [1966]

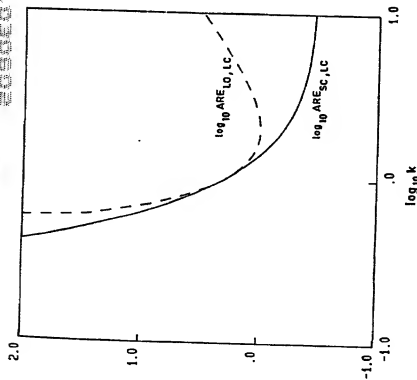


Figure 3.6 Asymptotic Relative Efficiencies of the LO Detector and of the SC Detector, Relative to the LG Detector, for Generalized Gaussian Noise

is obtained with $k = 2$. When $2v$ is an integer this gives a scaled Student- t density.

It can be shown that the variance of the generalized Cauchy density, if it exists, is $\sigma^2 v / [v(v-2)]$. This is finite for $vt > 2$, which is consistent with our observation that the tails of the density function decay in inverse proportion to $|z|^{v+1}$. Figure 3.7 shows the shapes of the generalized Cauchy densities for different values of k when $v = 4$ and $\sigma^2 = 1$. For a fixed value of σ^2 and k , the limiting case $v \rightarrow \infty$ gives the generalized Gaussian density of (3-1). This can be inferred directly from the definition $e^t = \lim_{v \rightarrow \infty} (1 + t/v)^v$. Thus we also get the Gaussian density as a limiting case for $k = 2$ and $v \rightarrow \infty$. The generalized Cauchy density function is therefore capable of modeling a wide range of noise density types.




Figure 3.7 Generalized Cauchy Probability Density Functions ($v^2 = 1$, $v = 4$)

The locally optimum nonlinearity f_{LO} for generalized Cauchy noise is easily found to be

$$f_{LO}(z) = \frac{v^2 + 1}{v^2 A(k)^2} + \frac{1}{|z|^2} |z|^{k-1} \operatorname{sgn}(z) \quad (3-12)$$

which should be compared with f_{LO} for the generalized Gaussian densities of (3-4). The nonlinearity of (3-12) does approach, pointwise, that of (3-4) as $v \rightarrow \infty$. On the other hand, for any fixed set of values of the parameters v , k , and σ^2 the characteristic f_{LO} of (3-12) always approaches zero for $|z| \rightarrow \infty$. This behavior is illustrated in Figure 3.8, which shows the normalized versions $\{v^2 A(k)^2 / (v^2 + 1)\} f_{LO}$ of f_{LO} for the generalized Cauchy densities for different values of the parameter k with $v^2 = 1$ and $v = 10$. As we have remarked, for $v = 1/2$ and $k = 2$ we get the Cauchy noise density of (3-11), for which f_{LO} is

$$f_{LO}(z) = \frac{2z}{z^2 + z^2} \quad (3-13)$$

This function is plotted in Figure 3.3 for $\sigma^2 = 1$. One interesting conclusion we can draw from these plots is that there are several combinations of the parameters k and v which lead to LO noise densities of the type shown in Figure 3.3 for ELF noise; they are approximately linearly increasing near $x = 0$, and then decay to zero for large magnitudes of x .




Figure 3.8 Normalized LO Nonlinearities for Generalized Cauchy PDF's ($\sigma^2 = 1, v = 10$)

The Fisher information $I(f_{k,v})$ for generalized Cauchy noise can be shown to be

$$I(f_{k,v}) = \frac{(vk + 1)^2 \Gamma(3/k) \Gamma(v + 1/2) \Gamma(v + 2/k) \Gamma(2 - 1/k)}{\sigma^2 v^2 \Gamma^2(1/k) \Gamma(v) \Gamma(2 + v + 1/k)} \quad (3-14)$$

a finite quantity for $k > 0.5$. Note that σ^2 is not the variance of $f_{k,v}$ of (3-9); the variance is finite for $vk > 2$. From this we may calculate $ARE_{LO,LC}$, the ARE of the LO detector for $f_{k,v}$ relative to the LC detector, when $f_{k,v}$ is the noise density function. The result is shown in Figure 3.10, where $ARE_{LO,LC}$ is plotted as a function of k for different values of the parameter v . Once again




Figure 3.9 LO Nonlinearity for Cauchy Noise PDF ($\sigma^2 = 1$)

we find that substantial improvements in asymptotic performance can be obtained by use of LO or AO detectors if the noise density function is known to be a particular non-Gaussian density. The use of the simple hard-limiting SC detector can also be shown to produce a significant improvement over the LC detector for a range of values of the parameters k and v .

Before we go on to consider mixture noise densities, we should mention that one simple model which leads to some of the noise densities we have discussed above is the random-power-level Gaussian model. Here we model the noise samples W_i as products of standard Gaussian (zero-mean, unit-variance) components and random amplitude factors with various density functions. This is, in fact, the basis for the Hall model. Such noise models have also been used by Spooner [1968], Haseell and Nolte [1971] and Adams and Nolte [1975]. The results we have described in this section were originally developed by Miller and Thomas [1972], who also considered the finite-support generalized beta densities which we have not included here. Some simple asymmetrical noise pdf models related to the Gaussian pdf are given in [Kanefsky and Thomas, 1985]. Huang and Thomas [1983] have also specifically




Figure 3.10 Asymptotic Relative Efficiencies of the LO Detectors, Relative to the LC Detector, for Generalized Cauchy Noise

considered nearly Gaussian skewed distributions and have compared the SC and LC detector performances under this condition.

3.3 Mixture Noise and Middleton Class A Noise

Suppose we want to model the behavior of a noise density function which is approximately Gaussian near the origin but has tails which decay at a lower rate than do the Gaussian density tails. An analytically simple model is provided by the mixture density function

$$f(x) = (1 - \eta)g(x) + \eta h(x) \quad (3-15)$$

where ϵ is some small positive constant, g is a Gaussian density function, and h is some other density function with heavier tails. Clearly, f defined by (3-15) is a valid density function as long as ϵ lies in the interval $[0, 1]$. For small enough values of ϵ the

behavior of f near the origin is dominated by that of g , assuming that h is a bounded function. For large values of $|x|$, however, h dominates the behavior of f since its tails decay at a slower rate than do those of g .

Mixture densities of the form of (3-15) have been used by many investigators to model heavy-tailed non-Gaussian noise density functions. In robustness studies they have been used to model classes of allowable noise density functions which are in the neighborhood of a nominal Gaussian density function g . The mixture model has also been found to provide a good fit, in many cases, to empirical noise data. As an example, let us point to the work by Trunk [1976] in which the mixture model is used to fit the empirically determined probability distribution function of the envelope of radar clutter returns. In this case g in (3-15) is a Rayleigh rather than a Gaussian density. In particular, Trunk used what we call the Gaussian-mixture model (more accurately, Rayleigh mixture), with h in (3-15) also a Gaussian (or Rayleigh) density with a variance larger than that of g .

The mixture noise density model of (3-15) can also be given a justification as an appropriate model for impulse noise, considered to be a train of random-amplitude and randomly occurring narrow pulses in a background of Gaussian noise. Let us express such an impulsive component of a noise waveform as

$$I(t) = \sum_{i=-\infty}^{\infty} A_i p(t - t_i) \quad (3-16)$$

Here the amplitudes A_i can be taken to be i.i.d. amplitudes and the t_i have commonly been assumed to be generated by a Poisson point process. The pulse shape p is determined by the receiver filter response. The classical analysis of Rice [1944] leads to a general result for the first-order probability density function of $I(t)$. Let v be the rate parameter of the Poisson point process and let T_p be the width of the pulse p . Then for $vT_p \ll 1$, one can derive the following approximation for the density function f_i of samples of $I(t)$ [Richter and Smith, 1971]:

$$f_i(x) = (1 - vT_p) \delta(x) + vT_p h(x) \quad (3-17)$$

Here h is a density function which depends on the pulse shape p and on the density function of the A_i . The quantity $1 - vT_p$ may be viewed as the probability that no impulse noise is present at the sampling time; it comes from the Poisson assumption about the occurrence times t_i . The result of (3-17) is reasonable for the low-density case $vT_p \ll 1$, for which there are gaps between successive noise pulses in the impulsive component $I(t)$. Upon

adding an independent Gaussian background noise process to $f(t)$ the first-order density function of the total noise process becomes a convolution of f with η , resulting in the noise density f of (3-16) in which ϵ is now $v\Gamma$, and Λ is the convolution of Λ_1 and η .

Middleton [1977, 1978a and 1978b, 1982] has described a canonical model based on a representation of the impulsive component of noise similar to, but more general than, that given by (3-16). For what is called his class A model the pulse widths are wide relative to the receiver filter impulse response so that the receiver filter passes the impulsive components, and physical mechanisms generating the interference can be used to interpret the parameters of the model for the noise. In terms of his two basic parameters (one related to $v\Gamma$, above, the other being the ratio of noise powers in the impulsive and Gaussian components) Middleton has obtained an expansion of the noise density function f as an infinite weighted sum of Gaussian densities with decreasing weights for Gaussian densities with increasing variances. Specifically, it has been shown that the univariate probability density function of the normalized, unit-variance noise which has a Gaussian component and an independent additive interference component arising from a Poisson mechanism may be approximated as

$$f(z) = \sum_{n=0}^{\infty} \frac{\epsilon^{-\Lambda} \Lambda^n}{n!} \frac{1}{\sqrt{2\pi\sigma_n^2}} e^{-z^2/(2\sigma_n^2)} \quad (3-18)$$

Here the parameter Λ , called the impulsive index, is like the product $v\Gamma$, being the product of an average rate of interfering waveform (pulse) generation and the waveform's mean duration. Thus a small value of Λ implies highly impulsive interference. The variances σ_n^2 are also related to physical parameters, being given as

$$\sigma_n^2 = \frac{(n/\Lambda) + \Gamma'}{1 + \Gamma'} \quad (3-19)$$

where Γ' is the ratio of power in the Gaussian component of the noise to the power in the Poisson-mechanism interference. The major appeal of this model is that its parameters have a direct physical interpretation; the class A model has been found to provide very good fits to a variety of noise and interference measurements [Spaulding and Middleton, 1977a; Middleton, 1978b]. The Middleton Class A noise model is actually a model for narrowband noise, and it is often the envelope of such noise that is to be described statistically. The envelope probability density function for this noise is easily obtained from (3-18) as an infinite mixture of Rayleigh noise densities.

By limiting the sum in (3-18) to the first M terms only, and dividing by the sum of the first M coefficients of the Gaussian densities to maintain normalization, approximations of Middleton's class A model are obtained. It is of significance here that for several cases of empirically fitted noise densities a rather small value for the integer M is found to be sufficient to give excellent approximations to both the noise probability density functions and to the corresponding locally optimum nonlinearities. Such a numerical study has been reported recently by Vastola [1984]. From this observation one concludes that with $M=2$ terms in (3-18), which does give very good approximations in the instances which have been considered, we end up with the mixture model of (3-15) in which $\epsilon = \Lambda/(1+\Lambda)$. Assuming that η and Λ also gives us that $\sigma_1^2/\sigma_0^2 = (1+\Lambda^2)/\Lambda^2$. In addition, of course, we find that Λ is also Gaussian here. Thus we find that the two-term mixture model of (3-15) has an additional justification as a special case arising from the class A model. In this particular interpretation the model parameters ϵ and σ_1^2/σ_0^2 can also be given a direct physical interpretation. For typical values of Λ and Γ , in the ranges (0.01, 0.5) and (0.0001, 0.1), respectively, we find that ϵ is in the range (0.01, 0.33) and σ_1^2/σ_0^2 is in the range (20, 10000). This indicates that the variance of the contaminating Λ in the mixture model may be much larger than that of the Gaussian component in real situations. We also remark here that Gaussian mixture models in general, of the type described by (3-18), may be thought of as special cases of the model mentioned at the end of the preceding section; this is the model of noise with a conditional density function which is Gaussian, conditioned on the variance, which is a random parameter.

Returning to the mixture model of (3-15) in which both η and Λ have zero means, we find that the variance σ^2 of the mixture noise density is

$$\sigma^2 = (1 - \epsilon)\sigma_0^2 + \sigma_1^2 \quad (3-20)$$

and the LO nonlinearity is

$$g_{LO}(z) = \frac{-(1-\epsilon)g'(z) - \epsilon h'(z)}{(1-\epsilon)g(z) + \epsilon h(z)} \quad (3-21)$$

Now we can express this in two alternative ways, using $\eta(z) = -\epsilon/\sigma_0^2 g'(z)$:

$$g_{LO}(z) = \frac{z/\sigma_0^2 - \epsilon/(1-\epsilon)h'(z)/\eta(z)}{1 + \epsilon/(1-\epsilon)h(z)/\eta(z)} \quad (3-22)$$

$$f_{LO}(\varepsilon) = \frac{-A'(\varepsilon)/A(\varepsilon) + [(1-\varepsilon)/(\varepsilon/\sigma_x^2 n_0^2)]/A(\varepsilon)}{1 + [(1-\varepsilon)/(\varepsilon/\sigma_x^2 n_0^2)]/A(\varepsilon)} \quad (3-23)$$

Assuming that A' , as well as A is bounded, for $\varepsilon \ll 1$ we find from (3-22) that for small values of $|\varepsilon|$ the function f_{LO} is approximately linear in ε . If $A'(\varepsilon)$ is not zero, then for very small values of $|\varepsilon|$ we will get a different behavior for f_{LO} , since $f_{LO}(0)$ will then have a value of approximately $-A'(\varepsilon)/A(\varepsilon)$. Note that $A'(\varepsilon)$ is strictly speaking $A'(\varepsilon+)$ or $A'(\varepsilon-)$. For large values of $|\varepsilon|$ the behavior of f_{LO} is revealed more easily by (3-23). If the tails of A decay at a lower rate than do those of n , in such a way that ε/σ_x^2 goes to zero faster than do $A(\varepsilon)$ and $A'(\varepsilon)$ for $|\varepsilon| \rightarrow \infty$, the second terms in the numerator and denominator in (3-23) become negligible for large values of $|\varepsilon|$. Thus the limiting behavior of f_{LO} for large $|\varepsilon|$ will generally be that of the LO characteristic for noise density function A , for heavy-tailed A .

Let A be the double-exponential noise density function of (2-15), in which the parameter σ is related to the variance σ_x^2 by $\sigma_x^2 = 2/\sigma^2$. Figure 3.11 shows the characteristic f_{LO} for the Gaussian and double-exponential mixture density with $\varepsilon = 0.05$ and $\sigma_x^2/\sigma^2 = 10$. The general characteristics of f_{LO} are as we would expect them to be. Note once again that the shape of f_{LO} here is similar to that determined for ELP noise, as given in Figure 3.3.

These results once again indicate that the simple sign correlator should perform well in impulsive noise modeled to have the mixture density function, as compared to the linear correlator detector. The ARE of the SG relative to the LO detector for the mixture noise density is given by

$$\begin{aligned} ARE_{SG,LO} &= 4\sigma^2 f'(0) \\ &= 4[(1-\varepsilon)\sigma^2 + \sigma_x^2] \left[\frac{1-\varepsilon}{\sqrt{2\sigma\sigma_x^2}} + \varepsilon h(0) \right]^2 \\ &= 4[1-\varepsilon + \varepsilon\sigma^2/\sigma_x^2] \left[\frac{1-\varepsilon}{\sqrt{2\pi}} + \varepsilon h(0) \right]^2 \end{aligned} \quad (3-24)$$

Note that the factor containing $A(0)$ above has a minimum value of $(1-\sigma^2/2\sigma_x^2)$, which is larger than zero for $\varepsilon < 1$. It follows then that for $\varepsilon > 0$ as well, $ARE_{SG,LO}$ can be made arbitrarily large by making σ_x^2/σ^2 sufficiently large. This is true specifically when A is the double-exponential density function. For this contamination noise density function A , the $ARE_{SG,LO} = 2$ when $\varepsilon = 1$, in which case the SG detector is the LO detector. It is thus interesting that for any ε strictly between zero and unity the $ARE_{SG,LO}$ can




Figure 3.11 LO Nonlinearity for Gaussian and Double-Exponential Noise PDF Mixture ($\varepsilon = 0.05$, $\sigma_x^2/\sigma^2 = 10$)

become arbitrarily large for such an A . The explanation is that the efficacy of the sign correlator detector is $4f'(0)$, which for the mixture density always contains a fixed contribution due to n for any σ_x^2 . The quantity $4A'(0)$ by itself decreases to zero for $\sigma_x^2 \rightarrow \infty$. The mixture density function f is not simply scaled by σ_x^2 for $0 < \varepsilon < 1$. Note that the LG detector, on the other hand, has efficacy $1/\sigma_x^2$, which converges to zero for $\sigma_x^2 \rightarrow \infty$.

The factor $[1-\varepsilon + \varepsilon\sigma^2/\sigma_x^2]$ in (3-24) also has a minimum value of $1-\varepsilon$, which is positive for $\varepsilon < 1$. Now $\sigma_x^2/\sigma^2 = (\sigma_x/\sigma)^2$, and $A(0)/\sigma_x^2$ has a constant value which we shall assume is not zero. Thus we find that for $0 < \varepsilon < 1$, the $ARE_{SG,LO}$ also approaches ∞ for $\sigma_x^2/\sigma^2 \rightarrow 0$. For any fixed σ_x^2 , the efficacy $1/\sigma_x^2$ of the LG detector approaches the value $[1-\varepsilon\sigma_x^2/\sigma^2]$ for $\sigma_x^2 \rightarrow 0$. The efficacy $4f'(0)$ of the SG detector now contains a contribution due to $h(0)$ which, on the other hand, approaches ∞ as σ_x^2 converges to zero, since $A(0)/\sigma_x^2$ is some positive constant. When $\varepsilon = 0$ the $ARE_{SG,LO}$ becomes $2/\pi$, its value for Gaussian noise.

We thus see that the SQ detector can far outperform the LG detector in highly impulsive noise modeled by the mixture density, for which σ_1^2/σ_2^2 is high, and also in the other extreme case of the mixture model placing a relatively high probability near the origin (Gaussian noise with "quiet" periods). For some numerical evaluations of the ARE_{EQ,LO} we refer the reader to the work of Miller and Thomas [1976].

One general conclusion we can make from the specific cases of non-Gaussian noise we have considered here is that with appropriate nonlinear processing of the inputs it is possible to get a substantial advantage over detectors employing the LG test statistic. In all our work we have assumed the availability of independent data components X_i at the detector input. This in turn is obtained under the assumption that the noise is almost "white" relative to the low-pass signal bandwidth. It is important to keep in mind that it is not permissible for the noise to be almost narrowband filtered; the input process if it contains impulsive non-Gaussian noise. This is not a problem for Gaussian noise, since the very operation of linear-correlation amounts to use of a low-pass filter in any case. For non-Gaussian white noise it is the nonlinear limiting type of operation performed by \bar{x}_{LO} which accounts for the major improvement in performance, through the de-emphasis of large noise values which this implies. The resulting nonlinearly processed data is then effectively low-pass filtered when the GC test statistic is formed. Thus it is permissible to insert an ideal low-pass filter passing the signal frequencies after the zero-memory nonlinearity \bar{x}_{LO} . But interchanging the order of these functions leads to a different system; the low-pass filter spreads out noise impulses in time, thus very significantly reducing the advantage obtainable with further nonlinear processing. It is for this reason that in practical systems such as that mentioned for ELF noise, pre-whitening or equalization filters are used before hard-limiting of the data, to reverse the effect of any low-pass filtering which may have taken place.

One useful indication the results of this and the previous section give us is that detector nonlinearities \bar{f} which are approximately linear near the origin but which become saturated and tend to limit the influence of large-magnitude observations should give good overall performance for both Gaussian and heavy-tailed impulsive noise density functions. We find, indeed, that such a nonlinearity can give us a *minimax robust* detection scheme for noise densities modeled by the mixture model [Kassam and Poor (1985)]. Other noise models and detector performance studies related to our discussion here may be found in the works of Kurz [1969], Rappaport and Kurz [1966], Klose and Kurz [1966], Chelshover [1973], Freeman [1981] and Ashbaugh and Poor [1985, 1986]. Many experimental studies of noise processes arising in

various applications have been reported; we refer here to the work of Milne and Ganton [1964] as one example, indicating the highly impulsive nature of underwater noise under certain conditions.

3.4 Adaptive Detection

We have so far always assumed, in obtaining the LO detectors and evaluating their performance, that the noise density function f is completely specified. In this book, in fact, our considerations are primarily confined to such situations and to *fixed* or *non-adaptive* detectors. At least in one special case of *completely specified* noise density an adaptive scheme is quite useful. This is the case where f is known except for its variance σ^2 , the noise power. In this case the LO nonlinearity \bar{x}_{LO} has a known shape, but its input-scaling factor is unknown. More generally, if f is not known, it is unlikely that \bar{x}_{LO} can be effectively estimated and adaptively updated. But a more reasonable scheme may be possible, in which the test statistic is chosen to be of some simple form with only a few variable parameters. These may then be adaptively set to optimize performance under different noise conditions. We shall focus briefly on this latter topic here, but let us discuss the former first.

Unknown Noise Variance

Let the noise density function be defined as

$$f(z) = \frac{1}{\sigma} \bar{f}(z/\sigma) \quad (3-25)$$

where \bar{f} is a known unit-variance density and σ^2 is an unknown parameter, the variance of f . The LO characteristic is that given by

$$\begin{aligned} \bar{x}_{LO}(z) &= -\frac{1}{\sigma} \frac{\bar{f}'(z/\sigma)}{\bar{f}(z/\sigma)} \\ &= \frac{1}{\sigma} \bar{x}_{LO}(z/\sigma) \end{aligned} \quad (3-26)$$

Note that $\bar{x}_{LO} = -\bar{f}'/\bar{f}$ is now a known function, but \bar{x}_{LO} is an amplitude as well as input scaled version of \bar{x}_{LO} . The amplitude scaling is not essential, and we may write down the LO test statistic as

$$\lambda_{LO}(X) = \sum_{i=1}^N x_i \bar{x}_{LO}(X_i/\sigma) \quad (3-27)$$

Under the noise-only null hypothesis H_0 of (2.13) the density function of X_k/σ is simply f , so that the null-hypothesis distribution of $\lambda_{AO}(X)$ is exactly known and the detector threshold can be obtained for any false-alarm probability specification. To implement $\lambda_{AO}(X)$ it is necessary to have a good estimate of σ . If the noise power level is non-stationary, periodic updating of the variance estimate of σ is necessary. Adaptive detection schemes which use input scaling with estimates of σ are quite commonly used in practice, and are commonly referred to as AGC (automatic gain control) schemes. Of course it is important that good estimates of σ be available; otherwise, significant departure from expected performance may result. A related adaptation strategy has been considered by Lu and Eisenstein [1984].

Unknown Noise Density

A useful adaptive detector structure is obtained by allowing only a few variable parameters in the definition of the detector test statistic, which may then be set adaptively to match the noise conditions. One particularly simple structure is suggested by our results of the previous sections, where we saw that the sign correlation detector generally performs quite well for heavy-tailed noise density functions which are typical for impulsive noise. On the other hand, for Gaussian noise the LC detector is optimum and the SG detector performs rather poorly. Now consider the test statistic

$$\begin{aligned} T_{OC}(X) &= \sum_{i=1}^N a_i [pX_i + (1-\gamma) \operatorname{sgn}(X_i)] \\ &= \gamma \sum_{i=1}^N a_i X_i + (1-\gamma) \sum_{i=1}^N a_i \operatorname{sgn}(X_i) \end{aligned} \quad (3-28)$$

in which γ is a free parameter. The choice $\gamma = 1$ makes this an LC test statistic, and $\gamma = 0$ makes it the SG test statistic. Therefore, if an adaptive scheme can be formulated which allows γ to be picked optimally for different noise density conditions, one can expect the resulting detector to have very good performance over a range of noise conditions.

This type of test statistic was suggested by Modestino [1977], from whose results it follows that the normalized efficacy ξ_1 of $T_{OC}(X)$ of (3-28) for our detection problem is

$$\xi_1 = \frac{\int_{-\infty}^{\infty} [1 + 2(1-\gamma)/\langle 0 \rangle]^2}{\gamma^2 \sigma^2 + 2\gamma(1-\gamma)\sigma + (1-\gamma)^2} \quad (3-29)$$

where

$$p_0 = \int_{-\infty}^{\infty} |z| f(z) dz \quad (3-30)$$

This result for ξ_1 is quite simple to derive. Modestino [1977] shows that ξ_1 is maximized for

$$\gamma = \frac{1 - 2p_0/\langle 0 \rangle}{(1 - p_0) + 2/\langle 0 \rangle(\sigma^2 - p_0^2)} \quad (3-31)$$

and the maximum value of ξ_1 using this value for γ is

$$\xi_{\max} = \frac{1 - 4p_0/\langle 0 \rangle + 4p_0^2/\langle 0 \rangle^2}{\sigma^2 - p_0^2} \quad (3-32)$$

For the generalized Gaussian noise densities of (3-1), evaluation of ξ_{\max} shows that the test statistic of (3-28) with optimum choice of γ has very good asymptotic performance relative to the AO detectors for $1 \leq k \leq 2$, where k is the rate of exponential decay parameter for the generalized Gaussian densities. In fact, the ARE of the optimum detector based on $T_{OC}(X)$ of (3-28) relative to the AO detector is always larger than 0.95 for this range of values.

One possibility in devising an adaptive scheme using $T_{OC}(X)$ of (3-28) is to estimate the parameters p_0 , $f(0)$ and σ^2 ; this requires noise-only training observations. Another possibility is to use a stochastic approximation technique operating on signal-plus-noise observations, which attempts to maximize the output SNR for $T_{OC}(X)$. This approach has been discussed by Modestino [1977]. A detector structure related to the one we have discussed above has been considered in [Garnaacki and Thomas, 1983].

A more general approach is to start with a specified set of nonlinearities $f_1(x), f_2(x), \dots, f_M(x)$, and to consider as possible nonlinear test statistics all linear combinations of these M functions. An adaptive detector may then be sought which uses coefficients for its linear combination which are optimum, say in the sense of maximizing the detector efficacy, for the prevailing noise probability density function. A useful simplification is obtained if the functions $f_j(x)$, $j = 1, 2, \dots, M$, form an orthonormal set for the allowable noise probability density functions. This means that for allowable f we have

$$\int_{-\infty}^{\infty} f_i(z) f_j(z) f(z) dz = \delta_{ij} \quad (3-33)$$

where δ_{ij} is the Kronecker delta function. Under this constraint the detector efficacy has a simple expression and the conditions on the linear combination coefficients to maximize efficacy can be found easily (Problem 2.8, Chapter 2). These conditions can also

form the basis for an adaptive detection scheme maximizing performance in different noise environments. A special case is obtained when the orthonormal functions $f_j(z)$ are defined to be non-zero over corresponding sets P_j , $j = 1, 2, \dots, M$, which are disjoint. An important example of this is quantization, in which the collection of M functions $\{f_j, j = 1, 2, \dots, M\}$ together with the set of linear combination weighting coefficients define a quantizer characteristic. We shall discuss these ideas further at the end of the next chapter.

While it is possible, then, to consider some simplified schemes for adaptive detection in unknown and nonstationary noise environments, the implementation of an efficient adaptive scheme necessarily adds, often significantly, to the complexity of the detector. Furthermore, there are considerations such as of sample sizes required to achieve convergence which have to be taken into account in designing a useful scheme of this type.

PROBLEMS

Problem 3.1

An alternative parameterization of the generalized Gaussian pdf's of (3-1) is in terms of k and $a = A(k)$, giving

$$f_A(z) = \frac{k}{2\pi \Gamma(1/k)} e^{-1/2 |z|^k / a^k}$$

Note that $A(k)$ was defined in (2-3) in terms of σ^2 , the variance.

- (a) Show that for fixed value of a the pdf f_A converges for $k \rightarrow \infty$ to the uniform pdf on $[-a, a]$.

- (b) Find the limit to which ARE_{GLC} of (2-8) converges, as $k \rightarrow \infty$. Verify that this agrees with the result of a direct calculation of ARE_{GLC} for the uniform pdf.

Problem 3.2

Let V be a Gaussian random variable with mean zero and variance unity. Let Z be an independent Rayleigh random variable with pdf

$$f_Z(z) = \frac{z}{\sigma^2} e^{-z^2/2\sigma^2}, \quad z \geq 0$$

Find the pdf of $X = ZV$. (This is a model for a conditionally Gaussian noise sample with a random power level.)

Problem 3.3

The symmetric, unimodal logistic pdf is defined as

$$f(x) = \frac{1}{\pi} \frac{e^{-x/\lambda}}{[1 + e^{-x/\lambda}]^2}, \quad -\infty < x < \infty$$

- (a) Prove that its variance is $\pi^2/3$. (Use a series expansion.) Plot on the same axes the zero-mean unit-variance Gaussian, double-exponential, and logistic pdf's. (The logistic pdf is useful as a non-Gaussian pdf having exponential tail behavior and smooth behavior at the origin.)

- (b) Show that f_{LO} for this pdf is given by

$$f_{LO}(z) = \frac{1}{\pi} [\pi F(z) - 1]$$

where F is the cumulative distribution function corresponding to the pdf f above. Sketch $f_{LO}(z)$.

- (c) Find ARE_{GLC} and ARE_{SGLC} in testing H_1 versus H_0 of (2-13) and (2-14) when f is the logistic pdf.

Problem 3.4

Obtain ARE_{SGLC} for generalized Cauchy noise in (2-13) and (2-14), and sketch the result as a function of k for a small, an intermediate, and a large value of ν .

Problem 3.5

In the mixture model of (3-15) let q and h both be zero-mean Gaussian pdf's, with q having unit variance. For $\sigma_s^2 = 100$ and $c = 0.05$ plot the LO nonlinearity using log scales for both axes.

Problem 3.6

Let f be the mixture noise pdf of (3-15) in which q is the zero-mean, unit-variance Gaussian pdf and h is a bounded symmetric pdf. Consider the OC detector based on the soft-limiter function defined in Problem 2.5 of Chapter 2; we will denote this soft-limiter function as l_r .

- (a) For fixed ϵ , find the mixture proportion ϵ and the pdf Λ (in terms of η and ϵ) for which the resulting mixture pdf $f = f^*$ has t_1 as the LO nonlinearity f_{LO} .
- (b) Consider the class of mixture pdf's obtained with different bounded symmetric Λ in the mixture model with η fixed as above and with ϵ fixed in terms of ϵ and η as above. Show that the efficacy of the GC detector based on t_1 , for H_1 versus H_0 , is a minimum for the pdf f^* in this class. (This is the essence of the min-max robustness property of the soft limiter.)

TO BE PRINTED

#1-41/2 /* this program takes in a raw 8 bit image, with x and y dimensions as inputs also,
and encodes that image with a specified number, spitting the encoded image out */

/* the current version, started just after sign_it.sav3, now adds the three parameters
of dc, root of the gray value, and a constant times the local gradient */

#include "pinecone.h"
#include "image.h"

#define NOISE_MAX 10000000
#define BITS 16
#define HALF_MAX 32768
#define MAX 65535
#define MAX1 65535
#define GV_POWER 0.4
#define GRAD_THRESHOLD 50.0

#define DISPLAY_IT 1

unsigned char *img;
long bit[BITS];
long gid_gv,gid_grad;
long xdim,ydim;
float *gv,*grad;
Colorindex *disp;
Colorindex *scale_disp;
Colorindex *pdisp;

int helplines = 2;
char *help[] =

{
 "usage: sign_it filename [xdim(default 510) ydim(default 256)]\n",
 "\nMust input both xdim and ydim if not using the defaults "
};

int fill_bits(int code_number){
 long i,tmp;

printf("The binary value ");

tmp = HALF_MAX;
for(i=0;i<16;i++){
 if(code_number>=tmp){
 printf("1");
 code_number-=tmp;

```

        bit[i]=1;
    }
    else {
        printf("0");
        bit[i]=0;
    }
    tmp/=2;
}
printf(" will be wallpapered across the image\n\n");
return(0);
}

```

```

int load_scale_disp(void){
    long i,j;

    pdisp = scale_disp+20;
    for(j=0;j<15;j++){
        for(i=1;i<20;i++){
            *pdisp = (unsigned char)255;
            pdisp += 20;
        }
        pdisp += 20;
    }
    pdisp = scale_disp+20+(35*400);
    for(j=0;j<15;j++){
        for(i=1;i<20;i++){
            *pdisp = (unsigned char)255;
            pdisp += 20;
        }
        pdisp += 20;
    }
    return(0);
}

```

```

int draw_scale(float value,long which){
    long i;
    float ftemp;

    value *=5;

    memcpy(disp,scale_disp,40000);
    ftemp = 20.0 * value;
    if(ftemp > 399.0)ftemp=399.0;
    pdisp = &disp[15*400 + (int)ftemp];
    for(i=0;i<20;i++){
        *pdisp = (unsigned char)255;
    }
}

```

```

        pdisp += 400;
    }
    winset(which);
    rectwrite(0,0,399,49,disp);

return(0);
}

int calculate_gv(){
unsigned char *pimg;
long i;
float *pgv;

    pimg = img;
    pgv = gv;
    for(i=0;i<(ydim*xdim);i++){
        *(pgv++) = powf( (float)*(pimg++) , GV_POWER );
    }

return(0);
}

int calculate_grad(){
unsigned char *pimg1,*pimg2,*pimg;
long i,j;
float avg,*pgrad;

    pimg = &img[1+xdim];
    pimg1 = &img[1];
    pimg2 = &img[1+2*xdim];
    pgrad = grad;
    for(i=0;i<(xdim*ydim);i++){*(pgrad++) = 0.0;
        pgrad = &grad[1+xdim];
        for(j=1;j<(xdim-1);j++){
            avg = (float)*(pimg1-1)+(float)*(pimg1++)+(float)*pimg1+(float)*(pimg-1)+(float)*(pimg+1)+(float)*(pimg2-1)+(float)*(pimg2++)+(float)*pimg2;
            avg/=8.0;
            *(pgrad++) = (float)*(pimg++) - avg;
        }
        pimg+=2; pimg1+=2; pimg2+=2; pgrad+=2;
    }

return(0);
}

```

```

main( argc, argv )
int  argc ;
char *argv[] ;
{
    long i,j,code_number,go=1,cur_bit,button;
    long temp,increment,last_middle,count_thresh = 0;
    long int_total[BITS];
    unsigned char *pimg,tmp,*pimg1,*img_out,*noise,*pnoise;
    char string[80], outfile[80];
    FILE *inf;
    float ftemp,current_scale = 1.0,rms,avg;
    float current_gv = 0.0035, current_grad = 0.0027;
    float f_inc,mult;
    float *pgrad,*pgv;
    long gid_img,gid_img1,gid_signed,which;

    if(argc<2 || argc ==3 || argc>4) {
        for(j=0;j<help_lines;j++)fprintf( stderr, "%s", help[j] );
        exit( 1 );
    }
    else if(argc ==2){
        xdim = 324;
        ydim = 414;
    }
    else {
        xdim = atoi( argv[2] );
        ydim = atoi( argv[3] );
    }

    if(DISPLAY_IT) disp = calloc(xdim*ydim, sizeof(Colorindex) );
    else disp = calloc(40000, sizeof(Colorindex) );
    scale_disp = calloc(40000, sizeof(Colorindex) );
    img = calloc(xdim*ydim, sizeof(unsigned char) );
    img_out = calloc(xdim*ydim, sizeof(unsigned char) );
    noise = calloc(xdim*ydim, sizeof(unsigned char) );
    gv = calloc(xdim*ydim, sizeof(float) );
    grad = calloc(xdim*ydim, sizeof(float) );
    if( !disp || !scale_disp || !img || !img_out || !noise || !gv || !grad){
        fprintf( stderr, "sign_it : can not allocate space\n" );
        exit( 1 );
    }

    /* read in binary data into array */
    inf = fopen(argv[1],"r");
    if(!inf) {

```

```

        fprintf(stderr,"sign_it: can't open %s\n",argv[1]);
        exit(1);
    }
    fread(img,sizeof(unsigned char),xdim*ydim,inf);
    fclose(inf);

    /* flip it */
    ping = img;
    ping1 = &img[xdim*(ydim-1)];
    for(i=0;i<(ydim/2);i++){
        for(j=0;j<xdim;j++){
            tmp = *ping;
            *(ping++) = *ping1;
            *(ping1++) = tmp;
        }
        ping1 -= (2*xdim);
    }

    /* open and read in master noise frame */
    inf = fopen("master_noise","r");
    if(!inf) {
        fprintf(stderr,"sign_it: can't open %s\n","master_noise");
        exit(1);
    }
    if((xdim*ydim) > NOISE_MAX){
        fprintf(stderr,"sign_it: image size larger than master key ");
        exit(1);
    }
    fread(noise,sizeof(unsigned char),xdim*ydim,inf);
    fclose(inf);

    /* calculate avg then rms noise of master_noise image */
    pnoise = noise;
    avg = 0.0;
    for(i=0;i<(ydim*xdim);i++){
        ftemp = (float)*(pnoise++);
        avg += ftemp;
    }
    avg /= (float)(xdim*ydim);
    printf("AVG noise value of master noise image = %f\n\n",avg);
    pnoise = noise;
    rms = 0.0;
    for(i=0;i<(ydim*xdim);i++){
        ftemp = (float)*(pnoise++) - avg;
        ftemp *= ftemp;
        rms += ftemp;
    }

```

```

    }
    rms /= (xdim*ydim);
    rms = (float)sqrt((double)rms);
    printf("RMS noise value of master noise image = %f \n\n",rms);

    /* calculate gv */
    calculate_gv(img,gv,xdim,ydim);

    /* calculate grad */
    calculate_grad(img,grad,xdim,ydim);

    /* user input */
    code_number = -1;
    while(code_number < 0 || code_number > MAX1){
        printf("Type in a number between 0 and %d: ",MAX1);
        scanf("%d",&code_number);
    }
    fill_bits(code_number);

    if(DISPLAY_IT){
        foreground();
        prefsz(xdim,ydim);
        gid_img = winopen("Original?");
        fflush();

        pdisp = disp;
        pimg = img;
        for(i=0;i<(ydim*xdim);i++){
            *(pdisp++) = (Colorindex)*(pimg++);
        }
        rectwrite(0,0,xdim-1,ydim-1,disp);

        prefsz(xdim,ydim);
        gid_img1 = winopen("Original?");
        rectwrite(0,0,xdim-1,ydim-1,disp);

        prefsz(xdim,ydim);
        gid_signed = winopen("Original?");

        load_scale_disp();
        prefsz(400,50);
        gid_gv = winopen("root GV rms noise");
        prefsz(400,50);
        gid_grad = winopen("GRAD rms noise");
    }
}

```

```

/* main visual feedback loop */
last_middle = 0;
while(go){
    pdisp = disp;
    pimg = img;
    pimg1 = img_out;
    pnoise = noise;
    pgv = gv;
    pgrad = grad;
    for(i=0;i<(ydim*xdim);i++){
        cur_bit = i%BITS;
        mult = current_gv * (pgv++) + current_grad * (pgrad++);
        if( (float)*pnoise > avg ){
            f_inc = ((float)*(pnoise++)) - avg ;
            increment = (int)(f_inc * mult);
        }
        else {
            f_inc = (avg - (float)*(pnoise++)) ;
            increment = (int)(f_inc * mult);
            increment = -increment;
        }
        if( fabs( (double) * (pgrad - 1) ) > GRAD_THRESHOLD ){
            increment = 0;
        }
        if(bit[cur_bit]){
            temp = (int)*(pimg) + increment;
        }
        else{
            temp = (int)*(pimg) - increment;
        }
        if( *(pimg++) == 0 )tmp=0;
        else if(temp < 0)tmp=0;
        else if(temp > 255)tmp=255;
        else tmp = (unsigned char)temp;
        if(DISPLAY_IT) *(pdisp++) = (Colorindex)tmp;
        *(pimg1++) = tmp;
    }
    if(DISPLAY_IT){
        winset(gid_signed);
        rectwrite(0,0,xdim-1,ydim-1,disp);
        pdisp = disp;
        pimg = img;
        for(i=0;i<(ydim*xdim);i++){
            *(pdisp++) = (Colorindex)*(pimg++);
        }
    }
}

```

```

winset(gid_img);
rectwrite(0,0,xdim-1,ydim-1,disp);
winset(gid_img1);
rectwrite(0,0,xdim-1,ydim-1,disp);

draw_scale(rms*current_gv,gid_gv);
draw_scale(rms*current_grad,gid_grad);

```

```

}

button=0;
while(1button){
    current_scale=1.0;
    if( getbutton(LEFTMOUSE) ){
        current_scale *= 1.15;
        button = 1;
        last_middle = 0;
    }
    if( getbutton(RIGHTMOUSE) ){
        current_scale *= 0.85;
        button = 1;
        last_middle = 0;
    }
    if( getbutton(MIDDLEMOUSE) ){
        while( getbutton(MIDDLEMOUSE) );
        if( last_middle ){
            button = 1;
            go=0;
        }
        else {
            if(which == gid_gv)which=gid_grad;
            else which=gid_gv;
            last_middle = 1;
        }
    }
}

if( go ){
    if( which == gid_gv )current_gv *= current_scale;
    else current_grad *= current_scale;
}

```

```

/* re-calculate and write out master_key */
pnoise = noise;
pimg = img; /* use img as a temporary buffer */
pgv = gv;
pgrad = grad;

```

```

count_thresh = 0;
for(i=0;i<(ydim*xdim);i++){
    mult = current_gv * (pgv++) + current_grad * (pgrad++);
    if( (float)*pnoise > avg ){
        f_inc = ((float)*(pnoise++) - avg );
        increment = (int)(f_inc * mult);
    }
    else {
        f_inc = (avg - (float)*(pnoise++));
        increment = (int)(f_inc * mult);
        increment = -increment;
    }
    if( fabs( (double) * (pgrad - 1) ) > GRAD_THRESHOLD ){
        count_thresh++;
        increment = 0;
    }
    *(pimg++) = (unsigned char)128 + (unsigned char)increment;
}

/* find mean value of the integer based noise,
   for each bit plane, then remove it, and store to dnoise */
for(i=0;i<BITS;i++){int_total[i] = 0;
pimg = img;
for(j=0;j<(ydim*xdim);j++){
    int_total[i%BITS] += (long) (*(pimg++) - 128 );
}
rms = 0.0;
for(j=0;j<BITS;j++){
    if(int_total[j] > 0){
        for(i=0;i<int_total[j];i++){
            temp = (long)rand();
            temp *= BITS;
            temp += j;
            if( (temp <(xdim * ydim)) && (img[temp] > 128)
)img[temp]-;
                else i--;
            }
        }
    }
    else if(int_total[j] < 0){
        int_total[j] = - int_total[j];
        for(i=0;i<int_total[j];i++){
            temp = (long)rand();
            temp *= BITS;
            temp += j;
            if( temp <(xdim * ydim) && (img[temp] < 128)
)img[temp]++;
        }
    }
}

```

```

        else i--;
    }
}

rms = 0.0;
pimg = img;
for(i=0;i<(ydim*xdim);i++){
    temp = (long) *(pimg++) - 128;
    rms += (float)(temp*temp);
}
rms /= (xdim * ydim);
rms = (float)sqrt((double)rms);
printf("\nFINAL RMS noise value of master key = %f \n\n",rms);
printf("count threshold hits = %d \n\n",count_thresh);
sprintf(outfile,"master_key");
inf = fopen(outfile,"w");
if(!inf) {
    fprintf(stderr,"sign_it: can't open %s\n",outfile);
    exit(1);
}
fwrite(img,sizeof(unsigned char),xdim*ydim,inf);
fclose(inf);

/* now re-sign output image because of slight changes to master key */

/* flip output image */
pimg = img_out;
pimg1 = &img_out[xdim*(ydim-1)];
for(i=0;i<(ydim/2);i++){
    for(j=0;j<xdim;j++){
        tmp = *pimg;
        *(pimg++) = *pimg1;
        *(pimg1++) = tmp;
    }
    pimg1 -= (2*xdim);
}

/* write out signed image */
sprintf(outfile,"%s.signed",argv[1]);
inf = fopen(outfile,"w");
if(!inf) {
    fprintf(stderr,"sign_it: can't open %s\n",outfile);
    exit(1);
}
fwrite(img_out,sizeof(unsigned char),xdim*ydim,inf);

```

```
fclose(inf);
```

```
/* free and clean up */
```

```
if(DISPLAY_IT) gexit();
```

```
free(img);
```

```
free(img_out);
```

```
free(disg);
```

```
free(scale_disp);
```

```
free(noise);
```

```
free(gv);
```

```
free(grad);
```

```
}
```

TO BE PRINTED

```
/* this program takes in a raw 8 bit image which is in general a sub-section of
another original image. The original image will have already been signed. This
program needs to know what offset and extent that the sub-section has relative to
the dimensions of the original. It also needs to have the master_noise file present
keyed to the original extent of the image also */
```

```
/* this one now uses the dot product approach to remove the innate bias from the
original */
```

```
#include "pinecone.h"
#include "../sgj_tools/image.h"
```

```
#define BITS 16
#define VALUE 32768
#define INCREMENT 0.5
```

```
int bit[BITS];
long dim,bits,fft_dim,fft_size;
float *ar,*ai;
double wr[10000],wi[10000];
```

```
int help_lines = 7;
```

```
char *help[] =
{
    "usage: recognize filename original_file orig_xdim orig_ydim x_offset y_offset",
    "patch_xdim patch_ydim\n",
    "\n Program requires that the file 'master_key' exists in current directory",
    "\n filename is image in 8-bit raw form which is in general sub-section of",
    "original image",
    "\n original_file is original image in 8-bit raw form ",
    "\n orig_xdim and orig_ydim is the pixel extent of the original image",
    "\n x_offset and y_offset is the offset in pixels of the upper left edge of the",
    "sub-section rel. to original",
    "\n patch_xdim and patch_ydim is the pixel extent of the image patch being",
    "recognized"
};
```

```
int general_purpose_filter(float *image, long xdim, long ydim, long which){
long i,j;
float *par,*pai,*pan,*pan_im,*pimage;
float k_value,zero_point,ii,jj,ftemp;
float std_dev=0.0;
```

```

memset(ar,0, fft_size * sizeof(float) );
memset(ai,0, fft_size * sizeof(float) );

/* copy image buffer into ar */
par = ar;
pimage = image;
for(i=0;i<ydim;i++){
    for(j=0;j<xdim;j++){
        *(par++) = *(pimage++);
    }
    par += (ftdim - xdim);
}

/* real 2d fft, in place */
realfft2d(ar,ai,bits,0,wr,wf);

/* if which == 0 or 1, find the standard deviation in frequency space */
if(which == 0 || which == 1){
    par = ar; pai = ai;
    pan = &ar[ftdim-1]; pan_im = &ai[ftdim-1];
    std_dev = 0.0;
    for(i=0;i<(1+ftdim/2);i++){
        ii = (float)i / (float)(ftdim/2);
        ii *= ii;
        for(j=0;j<(1+ftdim/2);j++){
            jj = (float)j / (float)(ftdim/2);
            jj = (float)sqrt((double)(ii+jj));

            ftemp = *par * *par + *pai * *pai;
            std_dev += jj*ftemp;
            par++; pai++;
            if(j!=0 && j!=(ftdim/2)){
                ftemp = *pan * *pan + *pan_im * *pan_im;
                std_dev += jj*ftemp;
                pan--; pan_im--;
            }
        }
        par += (ftdim/2 - 1); pai += (ftdim/2 - 1);
        pan += (ftdim + ftdim/2 - 1); pan_im += (ftdim + ftdim/2 - 1);
    }
    printf("\n Std deviation found = %e ",std_dev);
}

/* now filter it in the case of which == 1 */

```

```

if(which == 3){
    k_value = 1.0 / powf(zero_point,3.0);
    if(zero_point > 0.99 ) zero_point = 0.99;
    par = ar;pai=ai;
    pan = &ar[fftdim-1];pan_im=&ai[fftdim-1];
    for(i=0;i<(1+fftdim/2);i++){
        ii = (float)i / (float)(fftdim/2);
        ii *= ii;
        for(j=0;j<(1+fftdim/2);j++){
            jj = (float)j / (float)(fftdim/2);
            jj = (float)sqrt((double)(ii+jj*jj));

            if( jj < zero_point ){
                jj = 1.0 - (k_value*jj*jj*jj);
                *(par++) *= jj;
                *(pai++) *= jj;
                if(i!=0 && j!=(fftdim/2)){
                    *(pan--) *= jj;
                    *(pan_im--) *= jj;
                }
            }
            else {
                *(par++) = 0.0;
                *(pai++) = 0.0;
                if(i!=0 && j!=(fftdim/2)){
                    *(pan--) = 0.0;
                    *(pan_im--) = 0.0;
                }
            }
        }
        par += (fftdim/2 -1); pai += (fftdim/2 -1);
        pan += (fftdim +fftdim/2 -1); pan_im += (fftdim+fftdim/2 -1);
    }
}

```

/* and in the case of which == 2, then use the same filter used in the case 1 */

/* in the case of 1 and 2, inverse fft and copy back into the original pointer array */

```

if( which == 3 || which ==2){
    realfft2d( ar, ai, bits, 1, wr, wi) ;

    par = ar;
    pimage = image;
    for(i=0;i<ycdim;i++){
        for(j=0;j<xdim;j++){
            *(pimage++) = *(par++);
        }
        par += (fttdim - xdim);
    }

    return(1);
}

```

```

double dot_product(float *img1,float *img2,long size){
    long i;
    float *pimg1,*pimg2;
    double result = 0.0;

    pimg1 = img1;
    pimg2 = img2;
    for(i=0;i<size;i++) result += ( (double) *(pimg1++) * (double) *(pimg2++) );

    return(result);
}

```

```

double dot_squared_product(float *img1,float *img2,long size){
    long i;
    float *pimg1,*pimg2;
    double result = 0.0;
    double dtemp;

    pimg1 = img1;
    pimg2 = img2;
    for(i=0;i<size;i++){
        dtemp = (double)*(pimg1++);
        if(dtemp < 0.0){
            dtemp*=-dtemp;
            dtemp = -dtemp;
        }
        else dtemp *= dtemp;
    }
}

```

```

        result += ( dtemp * (double) *(pimg2++) );
    }

    return(result);
}

double dot_root_product(float *img1, float *img2, long size){
    long i;
    float *pimg1, *pimg2;
    double result = 0.0;
    double dtemp;

    pimg1 = img1;
    pimg2 = img2;
    for(i=0; i<size; i++){
        dtemp = (double)*(pimg1++);
        if(dtemp < 0){
            dtemp = sqrt(-dtemp);
            dtemp = -dtemp;
        }
        else dtemp = sqrt(dtemp);
        result += ( dtemp * (double)*(pimg2++) );
    }
    return(result);
}

double dot_rootroot_product(float *img1, float *img2, long size){
    long i;
    float *pimg1, *pimg2;
    double result = 0.0;
    double dtemp;

    pimg1 = img1;
    pimg2 = img2;
    for(i=0; i<size; i++){
        dtemp = (double)*(pimg1++);
        if(dtemp < 0){
            dtemp = sqrt(-dtemp);
            dtemp = sqrt(dtemp);
            dtemp = -dtemp;
        }
        else {
            dtemp = sqrt(dtemp);
            dtemp = sqrt(dtemp);
        }
    }
}

```

```

        result += ( dtemp * (double)*(pimg2++) );
    }
    return(result);
}

main( argc, argv )
int   argc ;
char  *argv[] ;
{
    long i,j,k,xdim,ydim,temp,patch_xdim,patch_ydim,xoffset,yoffset,index;
    long value = VALUE,code_number = 0,go;
    unsigned char tmp,"noise","pnoise","original","poriginal","p1;
    unsigned char *img,"pimg","pimg1,stmp;
    char string[80], outfile[80];
    FILE *inf;
    float *noise,"pfnnoise,total","fimg","pfimg","foriginal","pforiginal;
    float *fnnoise_tmp,"pfnnoise_tmp;
    double base_dot_dot,img_mag,original_mag,noise_mag,rms;
    double square_dot_dot,root_dot_dot,rootroot_dot_dot;
    double base_square_dot_dot,base_root_dot_dot,dtemp;
    double img_mag_root,img_mag_square,img_mag_rootroot;
    double dot1,root_dot1,root_dot2;

    if(argc != 9) {
        for(j=0;j<help_lines;j++){printf( stderr, "%s", help[j]);
            exit( 1 );
        }
        xdim = atoi( argv[3] );
        ydim = atoi( argv[4] );
        xoffset = atoi( argv[5] );
        yoffset = atoi( argv[6] );
        patch_xdim = atoi( argv[7] );
        patch_ydim = atoi( argv[8] );

        /* find the next power of two equal to or higher than patch */
        if(patch_xdim > patch_ydim)dim = patch_xdim;
        else dim = patch_ydim;
        ffdim = 1; go = 1; bits = 0;
        while( go ){
            if( dim > ffdim ){
                ffdim*=2;
                bits++;
            }
            else go = 0;
        }
    }
}

```

```

if(bits > 12){
    fprintf(stderr, "recognize : sorry, this particular program only accepts
4K images and less\n");
    exit( 1 );
}
fft_size = fftdim * fftdim;

img = calloc(patch_xdim*patch_ydim, sizeof(unsigned char));
fimg = calloc(patch_xdim*patch_ydim, sizeof(float));
original = calloc(xdim*ydim, sizeof(unsigned char));
foriginal = calloc(patch_xdim*patch_ydim, sizeof(float));
noise = calloc(xdim*ydim, sizeof(unsigned char));
fnoise = calloc(patch_xdim*patch_ydim, sizeof(float));
fnoise_tmp = calloc(patch_xdim*patch_ydim, sizeof(float));
ar = calloc(fft_size, sizeof(float));
ai = calloc(fft_size, sizeof(float));
if( !img || !noise || !original || !fnoise || !fnoise_tmp || !fimg || !foriginal || !ar ||
!ai){
    fprintf(stderr, "sign_it : can not allocate space\n");
    exit( 1 );
}

/* read in Suspected Patch into img */
inf = fopen(argv[1], "r");
if(!inf) {
    fprintf(stderr, "sign_it: can't open %s\n", argv[1]);
    exit(1);
}
fread( img, sizeof(unsigned char), patch_xdim*patch_ydim, inf);
fclose(inf);

/* flip it */
pimg = img;
p1 = &img[patch_xdim*(patch_ydim-1)];
for(i=0; i<(patch_ydim/2); i++){
    for(j=0; j<patch_xdim; j++){
        tmp = *pimg;
        *(pimg++) = *p1;
        *(p1++) = tmp;
    }
    p1 -= (2*patch_xdim);
}

/* copy it into float array, removing mean value */
pimg = img;

```

```

total = 0.0;
for(i=0;i<(patch_ydim*patch_xdim);i++)total += (float) *(pimg++);
total /= (float)(patch_xdim*patch_ydim);
pimg = img;
pfimg = fimg;
for(i=0;i<(patch_ydim*patch_xdim);i++) *(pfimg++) = (float) *(pimg++) - total;
pfimg = fimg;
img_mag = 0.0;
for(i=0;i<(patch_ydim*patch_xdim);i++){
    dtemp = (double)*(pfimg++);
    dtemp *= dtemp;
    img_mag += dtemp;
}
img_mag = sqrt(img_mag);
printf("img_mag = %f\n",img_mag);

/* now find its std deviation in frequency space using the general purpose
filter function */
/*
    general_purpose_filter(fimg,patch_xdim,patch_ydim,0);
*/

/* read in Original Unsigned Image */
inf = fopen(argv[2],"r");
if(!inf) {
    fprintf(stderr,"sign_it: can't open %s\n",argv[2]);
    exit(1);
}
fread(original,sizeof(unsigned char),xdim*ydim,inf);
fclose(inf);

/* create original patch */
index = yoffset * xdim + xoffset;
poriginal = original;
p1 = &original[index];
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        *(poriginal++) = *(p1++);
    }
    p1 += (xdim - patch_xdim);
}

/* flip it */
poriginal = original;
p1 = &original[patch_xdim*(patch_ydim-1)];
for(i=0;i<(patch_ydim/2);i++){

```

```

        for(j=0;j<patch_xdim;j++){
            tmp = *poriginal;
            *(poriginal++) = *p1;
            *(p1++) = tmp;
        }
        p1 -= (2*patch_xdim);
    }

    /* copy it into float array, removing mean */
    poriginal = original;
    total = 0.0;
    for(i=0;i<(patch_ydim*patch_xdim);i++)total += (float) *(poriginal++);
    total /= (float)(patch_xdim*patch_ydim);
    poriginal = original;
    pforiginal = foriginal;
    for(i=0;i<(patch_ydim*patch_xdim);i++) *(pforiginal++) = (float) *(poriginal++) -
total;

    /* now find its std deviation in frequency space, then filter it to roughly match
the suspect patch */
    /*
        general_purpose_filter(foriginal,patch_xdim,patch_ydim,1);
*/
    pforiginal = foriginal;
    original_mag = 0.0;
    for(i=0;i<(patch_ydim*patch_xdim);i++){
        dtemp = (double)*(pforiginal++);
        dtemp *= dtemp;
        original_mag += dtemp;
    }
    original_mag = sqrt(original_mag);
    printf("original_mag = %f \n",original_mag);

    /* now remove the original image from img by using the dot product, or
whatever */
    dot = dot_product(foriginal,fimg,patch_xdim*patch_ydim);
    printf(" initial dot = %le ",dot/(original_mag*img_mag));
    dot /= (original_mag * original_mag);
    printf("dot found = %le ",dot);
    pforiginal = foriginal;
    pfimg = fimg;
    img_mag = 0.0;
    for(i=0;i<(patch_ydim*patch_xdim);i++){
        *pfimg -= (dot * *(pforiginal++));
    }

```

```

/* now re-calculate the magnitudes */
if( "pfimg < 0.0 ) dtemp = sqrt( -(double)*pfimg );
else dtemp = sqrt( (double)*pfimg );
img_mag_rootroot += dtemp;
dtemp = (double)*(pfimg++);
if(dtemp < 0.0) img_mag_root -= dtemp;
else img_mag_root += dtemp;
dtemp *= dtemp;
img_mag += dtemp;
dtemp *= dtemp;
img_mag_square += dtemp;
}
img_mag = sqrt(img_mag);
img_mag_rootroot = sqrt(img_mag_rootroot);
img_mag_root = sqrt(img_mag_root);
img_mag_square = sqrt(img_mag_square);
dot = dot_product(foriginal, fimg, patch_xdim*patch_ydim);
printf(" new dot = %le \n", dot/(original_mag*img_mag));

```

```

/* open and read in master noise frame */
inf = fopen("master_key", "r");
if(!inf) {
    fprintf(stderr, "sign_it: can't open %s\n", "master_key");
    exit(1);
}
fread(noise, sizeof(unsigned char), xdim*ydim, inf);
fclose(inf);
yoffset = ydim - (yoffset + patch_ydim); /* needed for flipping */

```

```

/* main recognition loop */

```

```

rms = 0.0;
for(i=0; i<BITS; i++){

```

```

    /* create current bit plane noise patch, fnoise */
    /* THE MEAN OF THESE MASTER NOISE PLANES SHOULD BE
ZERO!!! FROM THE SIGNING PROCESS */
    index = yoffset * xdim + xoffset;
    pnoise = &noise[index];
    pfnoise = fnoise;
    for(j=0; j<patch_ydim; j++){

```

```

for(k=0;k<patch_xdim;k++){
    if( (index%BITS) == i ){
        *pfnnoise = (float) (*pnoise - 128);
        rms += (double)*pfnnoise * (double)*pfnnoise;
    }
    else *pfnnoise = 0.0;
    pfnnoise++;
    pnoise++;
    index++;
}
pnoise += (xdim - patch_xdim);
index += (xdim - patch_xdim);
}

```

```

/* now filter that patch using the same gaussian used on the original */

```

```

general_purpose_filter(pfnnoise,patch_xdim,patch_ydim,2);

```

```

pfnnoise = pfnnoise;
noise_mag = 0.0;
for(j=0;j<(patch_ydim*patch_xdim);j++){
    noise_mag += (double) *(pfnnoise) * (double) *(pfnnoise);
    pfnnoise++;
}
noise_mag = sqrt(noise_mag);

```

```

/* find dot product between suspect patch and filtered tmp noise */
dot = dot_product((fnoise,fimg,patch_xdim*patch_ydim);
dot /= (noise_mag * fimg_mag);

```

```

printf("dot=%le ",dot);

```

```

/* new experiment: re-weight the noise then do the root dot */

```

```

pfimg = fimg;
pfnnoise = pfnnoise;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        dtemp = (double)*pfimg;
        if( fabs( dtemp ) < 1.0 ) ;
        else {
            if( dtemp >= 0.0 ){
                *pfnnoise /= (float)sqrt( dtemp );
            }
            else {
                *pfnnoise /= (float)sqrt( -dtemp );
            }
        }
    }
}

```

```

    }
    noise_mag += (double) *(pfnnoise) * (double) *(pfnnoise);
    pfnnoise++; pfimg++;
}
}
noise_mag = sqrt(noise_mag);
root_dot = dot_root_product(fimg,fnoise,patch_xdim*patch_ydim);
root_dot /= (noise_mag * img_mag_root);
printf(" new root = %le ",root_dot);

pfimg = fimg;
pfnnoise = fnoise;
pfnnoise_tmp = fnoise_tmp;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        dtemp = (double)*pfimg;
        if( fabs( dtemp ) < 1.0 ) *pfnnoise_tmp = *pfnnoise;
        else {
            if( dtemp >= 0.0){
                *pfnnoise_tmp = *pfnnoise / (float)sqrt(
dtemp );
            }
            else {
                *pfnnoise_tmp = *pfnnoise / (float)sqrt( -
dtemp );
            }
        }
        noise_mag += (double) *(pfnnoise_tmp) * (double)
*(pfnnoise_tmp);
        pfnnoise++; pfimg++;pfnnoise_tmp++;
    }
}
noise_mag = sqrt(noise_mag);
root_dot = dot_root_product(fimg,fnoise_tmp,patch_xdim*patch_ydim);
root_dot /= (noise_mag * img_mag_root);
printf("new rootroot = %le ",root_dot);

/* add assumption */
/*
pfimg = fimg;
pfnnoise = fnoise;
pfnnoise_tmp = fnoise_tmp;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){

```

```

for(k=0;k<patch_xdim;k++){
    dtemp = (double)*pfimg + (double)*pfnoise *
INCREMENT;
    if( fabs( dtemp ) < 1.0 ) *pfnoise_tmp = *pfnoise;
    else {
        if( dtemp >= 0.0 ){
            *pfnoise_tmp = *pfnoise / (float)sqrt(
dtemp );
        }
        else {
            *pfnoise_tmp = *pfnoise / (float)sqrt( -
dtemp );
        }
    }
    noise_mag += (double) *(pfnoise_tmp) * (double)
*(pfnoise_tmp);
    pfnoise++; pfimg++;pfnoise_tmp++;
}
noise_mag = sqrt(noise_mag);
root_dot1 =
dot_root_product(fimg,fnoise_tmp,patch_xdim,patch_ydim);
root_dot1 /= (noise_mag * img_mag_root);
printf("new root add = %le ",root_dot1);
*/

/* subtract assumption */
pfimg = fimg;
pfnoise = fnoise;
pfnoise_tmp = fnoise_tmp;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        dtemp = (double)*pfimg - (double)*pfnoise *
INCREMENT;
        if( fabs( dtemp ) < 1.0 ) *pfnoise_tmp = *pfnoise;
        else {
            if( dtemp >= 0.0 ){
                *pfnoise_tmp = *pfnoise / (float)sqrt(
dtemp );
            }
            else {
                *pfnoise_tmp = *pfnoise / (float)sqrt( -
dtemp );
            }
        }
    }
}

```

```

    }
    noise_mag += (double) *(pfnoise_tmp) * (double)
*(pfnoise_tmp);
    pfnoise++; pfimg++; pfnoise_tmp++;
}
noise_mag = sqrt(noise_mag);
root_dot2 =
dot_root_product(fimg,fnoise_tmp,patch_xdim*patch_ydim);
root_dot2 /= (noise_mag * img_mag_root);
printf("new root sub = %le\n",root_dot2);
printf("\ndiff1 = %le   diff2 = %le ",root_dot1 - root_dot,root_dot2-
root_dot);
"/

if( dot > 0.0 ){
    bit[i] = 1;
    code_number+=value;
}
else {
    bit[i] = 0;
}
printf("    bit value %d = %d\n",i,bit[i]);
value/=2;

}
printf("\n\nCode Number Found = %d\n\n",code_number);
rms/=(double)(xdim*ydim);
rms = sqrt(rms);
printf("\n\nrms = %le\n\n",rms);

/* free and clean up */
free(img);
free(original);
free(noise);
free(fnoise);
free(fnoise_tmp);
free(fimg);
free(foriginal);
free(ar);
free(ai);
}

```

TO BE PRINTED

~~Image 3~~

/* this program takes in a raw 8 bit image which is in general a sub-section of another original image. The original image will have already been signed. This program needs to know what offset and extent that the sub-section has relative to the dimensions of the original. It also needs to have the master_noise file present keyed to the original extent of the image also */

/* this one now uses the dot product approach, removing the innate bias from the original */

```
#include "pinecone.h"
#include "../sgi_tools/image.h"
```

```
#define BITS 16
#define VALUE 32768
#define INCREMENT 0.5
#define KCONST 500.0
#define ZERO_POINT 0.2
```

```
int bit[BITS];
long dim, bits, fftdim, fft_size;
float *ar, *ai;
double wr[10000], wi[10000];
```

```
int help_lines = 7;
char *help[] =
{
    "usage: recognize filename original_file orig_xdim orig_ydim x_offset y_offset\n",
    "patch_xdim patch_ydim\n",
    "  \n Program requires that the file 'master_key' exists in current directory",
    "  \n filename is image in 8-bit raw form which is in general sub-section of\n",
    "  \n original image",
    "  \n original_file is original image in 8-bit raw form ",
    "  \n orig_xdim and orig_ydim is the pixel extent of the original image",
    "  \n x_offset and y_offset is the offset in pixels of the upper left edge of the\n",
    "  \n sub-section rel. to original",
    "  \n patch_xdim and patch_ydim is the pixel extent of the image patch being\n",
    "  \n recognized"
};
```

```
int general_purpose_filter(float *image, long xdim, long ydim, long which){
    long i;
    float *par, *pai, *pan, *pan_im, *pimage;
    float *par1, *pai1, *pan1, *pan_im1;
```

APPENDIX D

1

Appendix D

```

float k_value,ii,jj,ftemp,ftemp1,ratio;
float std_dev, total;
static float patch_std_dev;
static float original_std_dev;

memset(ar,0, fft_size * sizeof(float));
memset(ai,0, fft_size * sizeof(float));

/* copy image buffer into ar */
par = ar;
pimage = image;
for(i=0;i<ydlim;i++){
    for(j=0;j<xdlim;j++){
        *(par++) = *(pimage++);
    }
    par += (ftdim - xdlim);
}

/* real 2d fft, in place */
realfft2d(ar,ai,bits,0,wr,wi);

/* apply low pass to everything */
par = ar;pai=ai;
pan = &ar[ftdim-1];pan_im=&ai[ftdim-1];
par1 = &ar[fft_size - ftdim];pai1=&ai[fft_size-ftdim];
pan1 = &ar[fft_size-1];pan_im1=&ai[fft_size-1];
for(i=0;i<(1+ftdim/2);i++){
    ii = (float)i / (float)(ftdim/2);
    ii *= ii;
    for(j=0;j<(1+ftdim/2);j++){
        jj = (float)j / (float)(ftdim/2);
        jj = (float)sqrt((double)(i+j*jj));
        if( jj > ZERO_POINT )jj =0.0;
        else {
            jj = (ZERO_POINT - jj)/ZERO_POINT;
        }

        *par *= jj;
        *pai *= jj;
        par++; pai++;
        if(j!=0 && j!=(ftdim/2)){
            *pan *= jj;
            *pan_im *= jj;
            pan--; pan_im--;
        }
    }
}

```

```

par += (fftdim/2 - 1); pai += (fftdim/2 - 1);
pan += (fftdim + fftdim/2 - 1); pan_im += (fftdim + fftdim/2 - 1);

```

```

if(i!=0 && i!=(fftdim/2)){
    for(j=0;j<(1+fftdim/2);j++){
        jj = (float)j / (float)(fftdim/2);
        jj = (float)sqrt( (double)(i+j*jj) );
        if( jj > ZERO_POINT )jj =0.0;
        else {
            jj = (ZERO_POINT - jj)/ZERO_POINT;
        }

```

```

        *(par1++) *= jj;
        *(pai1++) *= jj;
        if(j!=0 && j!=(fftdim/2)){
            *(pan1--) *= jj;
            *(pan_im1--) *= jj;
        }
    }

```

```

    par1 -= (3*fftdim/2 + 1); pai1 -= (3*fftdim/2 + 1);
    pan1 -= (fftdim/2 + 1); pan_im1 -= (fftdim/2 + 1);
}
}

```

```

/* if which == 0 or 1, find the standard deviation in frequency space */
if(which == 0 || which == 1){

```

```

    par = ar; pai = ai;
    pan = &ar[fftdim-1]; pan_im = &ai[fftdim-1];
    std_dev = 0.0;
    total = 0.0;

```

```

    for(i=0;i<(1+fftdim/2);i++){
        ii = (float)i / (float)(fftdim/2);
        ii *= ii;
        for(j=0;j<(1+fftdim/2);j++){
            jj = (float)j / (float)(fftdim/2);
            jj = (float)sqrt((double)(i+j*jj));

```

```

            ftemp = *par * *par + *pai * *pai;
            std_dev += jj*ftemp;
            total += ftemp;
            par++; pai++;
            if(j!=0 && j!=(fftdim/2)){
                ftemp = *pan * *pan + *pan_im * *pan_im;
                total += ftemp;
                std_dev += jj*ftemp;
                pan--; pan_im--;
            }
        }
    }

```

```

    }

    }
    par += (fftdim/2 - 1); pai += (fftdim/2 - 1);
    pan += (fftdim + fftdim/2 - 1); pan_im += (fftdim + fftdim/2 - 1);
}
std_dev /= total;
printf("\n Std deviation found = %e ",std_dev);
}

if(which == 0) patch_std_dev = std_dev;
if(which == 1) original_std_dev = std_dev;

/* now filter it in the case of which == 1 */
/* and in the case of which == 2, then use the same filter used in the case 1 */
if( (which == 1 || which == 2) && (original_std_dev > 0.95 * patch_std_dev) ){
    ratio = patch_std_dev / original_std_dev;
    ratio ;
    if(ratio > 1.0)k_value = 0.0;
    else {
        k_value = -KCONST * (1.0 - ratio);
    }
    std_dev /= total;
    par = ar;pai=ai;
    pan = &ar[fftdim-1];pan_im=&ai[fftdim-1];
    par1 = &ar[fft_size - fftdim];pai1=&ai[fft_size-fftdim];
    pan1 = &ar[fft_size-1];pan_im1=&ai[fft_size-1];
    std_dev = 0.0;
    total = 0.0;
    for(i=0;i<(1+fftdim/2);i++){
        ii = (float)i / (float)(fftdim/2);
        ii *= ii;
        for(j=0;j<(1+fftdim/2);j++){
            jj = (float)j / (float)(fftdim/2);
            jj = ii+j*jj;
            ftemp1 = (float)sqrt((double)jj);

            jj = fexp{ jj * k_value};
            *par *= jj;
            *pai *= jj;
            ftemp = *par * *par + *pai * *pai;
            std_dev += ftemp1*ftemp;
            total += ftemp;
            par++; pai++;
            if(j!=0 && j!=(fftdim/2)){
                *pan *= jj;

```

```

        *pan_im *= jj;
        ftemp = *pan * *pan + *pan_im * *pan_im;
        std_dev += ftemp1*ftemp;
        total += ftemp;
        pan--; pan_im--;
    }
}
par += (fftdim/2 -1); pai += (fftdim/2 -1);
pan += (fftdim+fftdim/2 -1); pan_im += (fftdim+fftdim/2 -1);

if(i!=0 && i!=(fftdim/2)){
    for(j=0;j<(1+fftdim/2);j++){
        jj = (float)j / (float)(fftdim/2);
        jj = ii+jj*jj;

        jj = fexp( jj * k_value);
        *(par1++) *= jj;
        *(pai1++) *= jj;
        if(j!=0 && j!=(fftdim/2)){
            *(pan1--) *= jj;
            *(pan_im1--) *= jj;
        }
    }
    par1 -= (3*fftdim/2 +1); pai1 -= (3*fftdim/2 +1);
    pan1 -= (fftdim/2 +1); pan_im1 -= (fftdim/2 +1);
}
}
std_dev /= total;
if(which == 1) printf("\n Std deviation post-filtering = %e ",std_dev);
}

```

```

realfft2d( ar, ai, bits, 1, wr, wl) ;

```

```

par = ar;
pimage = image;
for(i=0;i<ydim;i++){
    for(j=0;j<xdim;j++){
        *(pimage++) = *(par++);
    }
    par += (fftdim - xdim);
}

return(1);

```

```
}
```

```
double dot_product(float *img1, float *img2, long size){  
    long i;  
    float *pimg1, *pimg2;  
    double result = 0.0;
```

```
    pimg1 = img1;  
    pimg2 = img2;  
    for(i=0; i<size; i++) result += ( (double) *(pimg1++) * (double) *(pimg2++) );  
  
    return(result);  
}
```

```
double dot_squared_product(float *img1, float *img2, long size){  
    long i;  
    float *pimg1, *pimg2;  
    double result = 0.0;  
    double dtemp;
```

```
    pimg1 = img1;  
    pimg2 = img2;  
    for(i=0; i<size; i++){  
        dtemp = (double)*(pimg1++);  
        if(dtemp < 0.0){  
            dtemp*=dtemp;  
            dtemp = -dtemp;  
        }  
        else dtemp *= dtemp;  
        result += ( dtemp * (double) *(pimg2++) );  
    }  
}
```

```
return(result);  
}
```

```
double dot_root_product(float *img1, float *img2, long size){  
    long i;  
    float *pimg1, *pimg2;  
    double result = 0.0;  
    double dtemp;
```

```
    pimg1 = img1;
```

```

pimg2 = img2;
for(i=0;i<size;i++){
    dtemp = (double)*(pimg1++);
    if(dtemp < 0){
        dtemp = sqrt(-dtemp);
        dtemp = -dtemp;
    }
    else dtemp = sqrt(dtemp);
    result += ( dtemp * (double)*(pimg2++) );
}
return(result);
}

double dot_rootroot_product(float *img1,float *img2,long size){
long i;
float *pimg1,*pimg2;
double result = 0.0;
double dtemp;

pimg1 = img1;
pimg2 = img2;
for(i=0;i<size;i++){
    dtemp = (double)*(pimg1++);
    if(dtemp < 0){
        dtemp = sqrt(-dtemp);
        dtemp = sqrt(dtemp);
        dtemp = -dtemp;
    }
    else {
        dtemp = sqrt(dtemp);
        dtemp = sqrt(dtemp);
    }
    result += ( dtemp * (double)*(pimg2++) );
}
return(result);
}

main( argc, argv )
int  argc ;
char *argv[] ;
{
    long i,j,k,xdim,ydim,temp,patch_xdim,patch_ydim,xoffset,yoffset,index;
    long value = VALUE,code_number = 0,go;
    unsigned char tmp,"noise","pnoise","original","poriginal","p1;
    unsigned char *img,"pimg","pimg1,stmp;

```

```

char string[80], outfile[80];
FILE *inf;
float *fnoise,*pfnoise,total,*fimg,*pfimg,*foriginal,*pforiginal;
float *fnoise_tmp,*pfnoise_tmp;
double base_dot,dot,img_mag,original_mag,noise_mag,rms;
double square_dot,root_dot,rootroot_dot;
double base_square_dot,base_root_dot,dtemp;
double img_mag_root,img_mag_square,img_mag_rootroot;
double dot1,root_dot1,root_dot2;

```

```

if(argc != 9) {
    for(j=0;j<helpines;j++){printf( stderr, "%s", help[j] );
        exit( 1 );
    }
    xdim = atoi( argv[3] );
    ydim = atoi( argv[4] );
    xoffset = atoi( argv[5] );
    yoffset = atoi( argv[6] );
    patch_xdim = atoi( argv[7] );
    patch_ydim = atoi( argv[8] );

```

```

/* find the next power of two equal to or higher than patch */

```

```

if(patch_xdim > patch_ydim)dim = patch_xdim;

```

```

else dim = patch_ydim;

```

```

fttdim = 1; go = 1; bits = 0;

```

```

while( go ){

```

```

    if( dim > fttdim ){

```

```

        fttdim*=2;

```

```

        bits++;

```

```

    }

```

```

    else go = 0;

```

```

}

```

```

if(bits > 12){

```

```

    fprintf( stderr, "recognize : sorry, this particular program only accepts

```

```

    4K images and less\n" );

```

```

    exit( 1 );

```

```

}

```

```

fft_size = fttdim * fttdim;

```

```

img = calloc(patch_xdim*patch_ydim, sizeof(unsigned char) );

```

```

fimg = calloc(patch_xdim*patch_ydim, sizeof(float) );

```

```

original = calloc(xdim*ydim, sizeof(unsigned char) );

```

```

foriginal = calloc(patch_xdim*patch_ydim, sizeof(float) );

```

```

noise = calloc(xdim*ydim, sizeof(unsigned char) );

```

```

fnoise = calloc(patch_xdim*patch_ydim, sizeof(float) );

```

```

fnoise_tmp = calloc(patch_xdim*patch_ydim, sizeof(float) );

```

```

ar = calloc(fft_size, sizeof(float) );
al = calloc(fft_size, sizeof(float) );
if( !img || !noise || !original || !noise || !noise_tmp || !img || !original || !ar ||
lai){
    fprintf(stderr, "sign_it : can not allocate space\n" );
    exit( 1 );
}

/* read in Suspected Patch into img */
inf = fopen(argv[1], "r");
if(!inf) {
    fprintf(stderr, "sign_it: can't open %s\n", argv[1]);
    exit(1);
}
fread( img, sizeof(unsigned char), patch_xdim*patch_ydim, inf);
fclose(inf);

/* flip it */
pimg = img;
p1 = &img[patch_xdim*(patch_ydim-1)];
for(i=0; i<(patch_ydim/2); i++){
    for(j=0; j<patch_xdim; j++){
        tmp = *pimg;
        *(pimg++) = *p1;
        *(p1++) = tmp;
    }
    p1 -= (2*patch_xdim);
}

/* copy it into float array, removing mean value */
pimg = img;
total = 0.0;
for(i=0; i<(patch_ydim*patch_xdim); i++) total += (float) *(pimg++);
total /= (float)(patch_xdim*patch_ydim);
pimg = img;
pfimg = fimg;
for(i=0; i<(patch_ydim*patch_xdim); i++){
    *(pfimg++) = (float) *(pimg++) - total;
    pfimg = fimg;
}
img_mag = 0.0;
for(i=0; i<(patch_ydim*patch_xdim); i++){
    dtemp = (double)*(pfimg++);
    dtemp *= dtemp;
    img_mag += dtemp;
}
img_mag = sqrt(img_mag);

```

```

printf("img_mag = %f ",img_mag);

/* now find its std deviation in frequency space using the general purpose
filter function */
general_purpose_filter(fimg,patch_xdim,patch_ydim,0);

/* read in Original Unsigned Image */
inf = fopen(argv[2],"r");
if(!inf) {
    fprintf(stderr,"sign_it: can't open %s\n",argv[2]);
    exit(1);
}
fread(original,sizeof(unsigned char),xdim*ydim,inf);
fclose(inf);

/* create original patch */
index = yoffset * xdim + xoffset;
poriginal = original;
p1 = &original[index];
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        *(poriginal++) = *(p1++);
    }
    p1 += (xdim - patch_xdim);
}

/* flip it */
poriginal = original;
p1 = &original[patch_xdim*(patch_ydim-1)];
for(i=0;i<(patch_ydim/2);i++){
    for(j=0;j<patch_xdim;j++){
        tmp = *poriginal;
        *(poriginal++) = *p1;
        *(p1++) = tmp;
    }
    p1 -= (2*patch_xdim);
}

/* copy it into float array, removing mean */
poriginal = original;
total = 0.0;
for(i=0;i<(patch_ydim*patch_xdim);i++){total += (float) *(poriginal++);
total /= (float)(patch_xdim*patch_ydim);
poriginal = original;
pforiginal = foriginal;

```

```

    for(i=0;i<(patch_ydim*patch_xdim);i++) *(pforiginal++) = (float) *(poriginal++) -
total;

```

/* now find its std deviation in frequency space, then filter it to roughly match the suspect patch */

```

    general_purpose_filter(foriginal,patch_xdim,patch_ydim,1);
    pforiginal = foriginal;
    original_mag = 0.0;
    for(i=0;i<(patch_ydim*patch_xdim);i++){
        dtemp = (double)*(pforiginal++);
        dtemp *= dtemp;
        original_mag += dtemp;
    }
    original_mag = sqrt(original_mag);
    printf("original_mag = %f\n",original_mag);

```

/* now remove the original image from img by using the dot product, or whatever */

```

    dot = dot_product(foriginal,fimg,patch_xdim*patch_ydim);
    printf("Initial dot = %le ",dot/(original_mag*img_mag));
    dot /= (original_mag * original_mag);
    printf("dot found = %le ",dot);
    pforiginal = foriginal;
    pfimg = fimg;
    img_mag = 0.0;
    for(i=0;i<(patch_ydim*patch_xdim);i++){
        *pfimg -= (dot * *(pforiginal++));

```

/* now re-calculate the magnitudes */

```

    if( *pfimg < 0.0 ) dtemp = sqrt( -(double)*pfimg );
    else dtemp = sqrt( (double)*pfimg );
    img_mag_rootroot += dtemp;
    dtemp = (double)*(pfimg++);
    if(dtemp < 0.0) img_mag_root -= dtemp;
    else img_mag_root += dtemp;
    dtemp *= dtemp;
    img_mag += dtemp;
    dtemp *= dtemp;
    img_mag_square += dtemp;
}
img_mag = sqrt(img_mag);
img_mag_rootroot = sqrt(img_mag_rootroot);
img_mag_root = sqrt(img_mag_root);
img_mag_square = sqrt(img_mag_square);

```

```

dot = dot_product(foriginal,img,patch_xdim*patch_ydim);
printf(" new dot = %le \n",dot/(original_mag*img_mag));

```

```

/* open and read in master noise frame */
inf = fopen("master_key","r");
if(!inf) {
    fprintf(stderr,"sign_it: can't open %s\n","master_key");
    exit(1);
}
fread(noise,sizeof(unsigned char),xdim*ydim,inf);
fclose(inf);
yoffset = ydim - (yoffset + patch_ydim); /* needed for flipping */

```

```

/* main recognition loop */

```

```

rms = 0.0;
for(i=0;i<BITS;i++){

```

```

    /* create current bit plane noise patch, pnoise */
    /* THE MEAN OF THESE MASTER NOISE PLANES SHOULD BE
ZERO!!! FROM THE SIGNING PROCESS */

```

```

    index = yoffset * xdim + xoffset;
    pnoise = &noise[index];
    pfnnoise = pnoise;
    for(j=0;j<patch_ydim;j++){
        for(k=0;k<patch_xdim;k++){
            if( (index%BITS) == i ){
                *pfnnoise = (float) (*pnoise - 128);
                rms += (double)*pfnnoise * (double)*pfnnoise;
            }
            else *pfnnoise = 0.0;
            pfnnoise++;
            pnoise++;
            index++;
        }
        pnoise += (xdim - patch_xdim);
        index += (xdim - patch_xdim);
    }

```

```

/* now filter that patch using the same gaussian used on the original */
general_purpose_filter(pnoise,patch_xdim,patch_ydim,2);
pfnnoise = pnoise;

```

```

noise_mag = 0.0;
for(j=0;j<(patch_ydim*patch_xdim);j++){
    noise_mag += (double) *(pfnnoise) * (double) *(pfnoise);
    pfnnoise++;
}
noise_mag = sqrt(noise_mag);

/* find dot product between suspect patch and filtered tmp noise */
dot = dot_product(fnoise,fimg,patch_xdim*patch_ydim);
dot /= (noise_mag * img_mag);

printf("dot=%le ",dot);

```

```

/* new experiment: re-weight the noise then do the root dot */
pfimg = fimg;
pfnnoise = fnoise;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        dtemp = (double)*pfimg;
        if( fabs( dtemp ) < 1.0 );
        else {
            if( dtemp >= 0.0){
                *pfnnoise /= (float)sqrt( dtemp );
            }
            else {
                *pfnnoise /= (float)sqrt( -dtemp );
            }
        }
        noise_mag += (double) *(pfnnoise) * (double) *(pfnoise);
        pfnnoise++; pfimg++;
    }
}
noise_mag = sqrt(noise_mag);
root_dot = dot_root_product(fimg,fnoise,patch_xdim*patch_ydim);
root_dot /= (noise_mag * img_mag_root);
printf(" new root = %le ",root_dot);

```

```

pfimg = fimg;
pfnnoise = fnoise;
pfnnoise_tmp = fnoise_tmp;
noise_mag = 0.0;
for(j=0;j<patch_ydim;j++){
    for(k=0;k<patch_xdim;k++){
        dtemp = (double)*pfimg;
        if( fabs( dtemp ) < 1.0 ) *pfnnoise_tmp = *pfnnoise;
    }
}

```

```

else {
    if( dtemp >= 0.0){
        *pfnoise_tmp = *pfnoise / (float)sqrt(
dtemp );
    }
    else {
        *pfnoise_tmp = *pfnoise / (float)sqrt( -
dtemp );
    }
}
noise_mag += (double) * (pfnoise_tmp) * (double)
*(pfnoise_tmp);
pfnoise++; pfimg++;pfnoise_tmp++;
}
noise_mag = sqrt(noise_mag);
root_dot = dot_root_product(pfimg,pfnoise_tmp,patch_xdim*patch_ydim);
root_dot /= (noise_mag * img_mag_root);
printf("new rootroot = %le ",root_dot);

/* add assumption */
/*
    pfimg = fimg;
    pfnoise = fnoise;
    pfnoise_tmp = fnoise_tmp;
    noise_mag = 0.0;
    for(j=0;j<patch_ydim;j++){
        for(k=0;k<patch_xdim;k++){
            dtemp = (double)*pfimg + (double)*pfnoise *
INCREMENT;
            if( fabs( dtemp ) < 1.0 ) *pfnoise_tmp = *pfnoise;
            else {
                if( dtemp >= 0.0){
                    *pfnoise_tmp = *pfnoise / (float)sqrt(
dtemp );
                }
                else {
                    *pfnoise_tmp = *pfnoise / (float)sqrt( -
dtemp );
                }
            }
            noise_mag += (double) * (pfnoise_tmp) * (double)
*(pfnoise_tmp);
            pfnoise++; pfimg++;pfnoise_tmp++;
        }
    }
}

```

```

        noise_mag = sqrt(noise_mag);
        root_dot1 =
dot_root_product(fimg,fnnoise_tmp,patch_xdim*patch_ydim);
        root_dot1 /= (noise_mag * img_mag_root);
        printf("new root add = %le ",root_dot1);
*/

/* subtract assumption */
/*
        pfimg = fimg;
        pfnoise = fnnoise;
        pfnoise_tmp = fnnoise_tmp;
        noise_mag = 0.0;
        for(j=0;j<patch_ydim;j++){
            for(k=0;k<patch_xdim;k++){
                dtemp = (double)*pfimg - (double)*pfnoise *
INCREMENT;
                if( fabs( dtemp ) < 1.0 ) *pfnoise_tmp = *pfnoise;
                else {
                    if( dtemp >= 0.0){
                        *pfnoise_tmp = *pfnoise / (float)sqrt(
dtemp );
                    }
                    else {
                        *pfnoise_tmp = *pfnoise / (float)sqrt( -
dtemp );
                    }
                }
                noise_mag += (double) * (pfnoise_tmp) * (double)
*(pfnoise_tmp);
                pfnoise++; pfimg++;pfnoise_tmp++;
            }
        }
        noise_mag = sqrt(noise_mag);
        root_dot2 =
dot_root_product(fimg,fnnoise_tmp,patch_xdim*patch_ydim);
        root_dot2 /= (noise_mag * img_mag_root);
        printf("new root sub = %le \n",root_dot2);
        printf("\ndiff1 = %le   diff2 = %le ",root_dot1 - root_dot,root_dot2-
root_dot);
*/

        if( dot > 0.0 ){
            bit[j] = 1;
            code_number+=value;

```

```

    }
    else {
        bit[i] = 0;
    }
    printf("    bit value %d = %d\n", i, bit[i]);
    value/=2;

```

Fi
(cont.)

```

}
printf("\n\nCode Number Found = %d\n\n", code_number);
rms/=(double)(xdim*ydim);
rms = sqrt(rms);
printf("\n\nrms = %le\n\n", rms);

```

```

/* free and clean up */
free(img);
free(original);
free(noise);
free(fnoise);
free(fnoise_imp);
free(fimg);
free(foriginal);
free(ar);
free(al);

```

U.S. District Court

U.S. District Court of Eastern Pennsylvania (Philadelphia)

CIVIL DOCKET FOR CASE #: 01-CV-5497

AIRCLIC INC. v. NEOMEDIA TECHNOLOGIE

Filed: 10/30/01

Assigned to: JUDGE LOUIS H. POLLAK

Demand: \$0,000

Nature of Suit: 830

Lead Docket: None

Jurisdiction: Federal Question

Dkt# in other court: None

Cause: 35:271 Patent Infringement

AIRCLIC INC. HOWARD D. SCHER
PLAINTIFF [COR LD NTC]
BUCHANAN INGERSOLL PROFESSIONAL
CORP
ELEVEN PENN CENTER, 14TH FL.
1835 MARKET ST.
PHILADELPHIA, PA 19103
USA
TEL 215-665-8700

v.
NEOMEDIA TECHNOLOGIES, INC. A. CHRISTOPHER YOUNG
DEFENDANT [COR LD NTC]
PEPPER HAMILTON, LLP
18TH & ARCH STS.
3000 TWO LOGAN SQUARE
PHILA, PA 19103-2799
USA
TEL 215-981-4750

DOCKET PROCEEDINGS

DATE # DOCKET ENTRY

10/30/01 1 Complaint. filing fee \$ 150 receipt # 774975 (ss)
[Entry date 10/31/01]

10/30/01 -- Summons(es) issued, One original given to: counsel

MEMORANDUM ATTACHED TO PLAINTIFF'S MOTION SHALL BE DEEMED
FILED WITH THE CLERK OF COURT AS OF THE DATE OF THIS
ORDER

(SIGNED BY JUDGE LOUIS H. POLLAK) 1/16/01 ENTERED AND
COPIES MAILED. (jl) [Entry date 01/16/02]

1/16/02 10 Sur-Reply Memorandum by PLAINTIFF AIRCLIC INC. in
opposition to DEFENDANT NEOMEDIA TECHNOLOGIES MOTION TO
DISMISS THE COMPLAINT PURSUANT TO FED.R.CIV.P.12 (b)(1)
AND

(3). (jl) [Entry date 01/17/02]

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194